

# ACME



*Issued Oct. 2024*



ACME Electronics Corporation  
越峯電子材料股份有限公司



<https://www.acme-ferrite.com.tw>



## Introduction

### COMPANY BRIEF

ACME Electronics Corporation, a subsidiary of USI Corporation, has been developed into one of the world's leading manufacturers of soft magnetic products since her establishment. Incorporated in 1991 and listed in Taiwan OTC market in 2005, ACME with her headquarter in Taipei possesses four manufacturing sites where one is in Taiwan, one in Malaysia, and two in China.

### Our Products

A variety of soft magnetic products in different material types, core shapes and sizes are manufactured in ACME. These products are widely used for the manufacture of chokes, inductors, filters, transformers, antennas and other components or devices that are applied in the fields of communication, lighting, alternative energy, automotive, medical system, consumer and industrial electronics. ACME's products are adopted by leading manufacturers of these components and devices worldwide.



Headquarter of USI Group, Taipei



Kuan-Yin Factory, Taiwan

### Our History

- 1991** ACME Electronics Corporation, Taiwan was incorporated.
- 1994** Built the first manufacturing facility in Kuan-Yin District, Taoyuan County, Taiwan.
- 2000** Incorporated ACME Electronics (Kunshan) Co., Ltd., China and built a modern manufacturing facility to service the market in Northern and Eastern China. This factory had been expanded and equipped with the latest machinery and equipment. It now has a sintering capacity 6,800 metric tons a year.
- 2005** Incorporated ACME Electronics (Guangzhou) Co., Ltd., China. Located in Zhengcheng city, this new and well equipped facility has a sintering capacity of 6,300 metric tons a year and services the market in southern China.
- 2009** Acquired ACME Ferrite Products Sdn. Bhd., Malaysia. Located in Ipoh, Perak, ACME Malaysia is a leading Ni-Zn soft ferrite manufacturer that specialises in ferrite products for the automotive industry. This facility has a sintering capacity of 1,200 metric tons a year.
- 2016** Established a experimental line for high purity SiC powder.
- 2017** Established a experimental line for ceramic inject molding.
- 2018** A high-purity SiC powder mass production line was established and mass production was successful.
- 2021** Metal soft magnetic products in powder cores, nanocrystalline ribbon wound cores and others were launched.



## Ferrite



**AGGRESSIVELY  
COMMITTED TO  
MANUFACTURING  
EXCELLENCE**



## Contents

<b>Symbols and Definitions</b>	2
<b>Material Characteristics</b>	8
MnZn- Conventional Low Loss - P4, P41, P42, P48	10
MnZn- Wide temp. Low Loss - P45, P451, P452, P47	10
MnZn- High Bs - P49, P491, P492	11
MnZn- High Frequency Low Loss - P5, P51, P52, P53, P61, P63	11
MnZn- Conventional High $\mu$ for CM Chokes - A10, A121, A13, A151	12
MnZn- Wide Band Filter - A05, A06, A07, A071, A102, A103	12
MnZn- High $\mu$ & Tc for Automotives - A072, A104	13
MnZn- High $\mu$ Wide Temperature - A044, A064, N10	13
MnZn- For Wide Temp. LAN - A043, A062, N07	14
MnZn- Low THD - A101	14
MnZn- Low $\eta_B$ - N4, N42, N43	15
MnZn- EMI Filter - N5	15
Ni-Zn- Automotive EMI Suppression - K081, K10, K12, K13, K15, K151, K20, K25	16
Ni-Zn- Automotive EMI Suppression - D1C, D25, D27, D28, D30, D35, D37, D40	16
Ni-Zn- Conventional High Bs - A30, A31, A40, A50	17
Ni-Zn- Automotive High Bs - B30, B40, B45, B60	17
Ni-Zn- Low Permeability - L1, L2, L3, L4, L5, L6	18
Ni-Zn- Rod Core For Antenna - H2, H3, H5, H5M, H5R, H5N	18
Ni-Zn- Wide Temperature RFID - F10, F52, F80, F100	19
MgZn- Rod Core For Antenna - H3A, H3B, H4	19
MgZn- EMI Filter - M80	19
<b>Product Specifications</b>	104
<i>Mn-Zn Ferrite</i>	
CI Cores (Power Inductor)	104
EFD Cores	108
EPC Cores	116
ER Cores	118
ERX Cores	126
EPO Cores	127
EP Cores	128
CUT Cores	130
POT Cores	132
PEI Cores (Planner Core)	136
PQ Cores	138
RM/LM Cores	140
EE/EEL Cores	142
EF Cores	148
UR Cores	150
OT Cores	151
UU Cores	152
I Cores	154
R Cores	156
ZT Cores	158
RID Cores	159
ET Cores	160
UT Cores	161
URT Cores	162
T Cores	166
RH Cores	186
<i>Ni-Zn Ferrite</i>	
R Cores	188
SC Cores	189
RID Cores	190
R Cores (Multi Aperture)	191
AR Cores	192
FC/OT Cores	193
I Cores (Plates)	194
I Cores	195
POT Cores	196
T Cores (EMI Suppression)	197
T Cores	198
RH Cores	204

## INTRODUCTION TO FERRITES


Ferrites are categorized as electroceramics with ferrimagnetic properties.

Due to superexchange interactions between the electrons of metal and oxygen ions ferrites behave ferrimagnetism. The less parallel spin alignment in ferrites results lower magnetization compared to ferromagnetic metals in which the spin moments are oriented parallel to one another. Due to the intrinsic interactions between oxygen and metal ions in atomic level, ferrites possess higher resistivity in comparison to ferromagnetic

metals. This makes ferrites considerably useful in a wide range of applications at higher frequencies and technologically very valuable. The crystal structure of ferrites is formed with spinel lattice having the chemical formula  $\text{MeFe}_2\text{O}_4$  where Me represents a divalent metal ion (e.g.  $\text{Fe}^{2+}$ ,  $\text{Ni}^{2+}$ ,  $\text{Mn}^{2+}$ ,  $\text{Mg}^{2+}$ ,  $\text{Co}^{2+}$ ,  $\text{Zn}^{2+}$ ,  $\text{Cu}^{2+}$  etc.). Nowadays the most popular compounds of commercial ferrites are  $\text{MnZnFe}_2\text{O}_4$  and  $\text{NiZnFe}_2\text{O}_4$  with major difference in resistivity between each other. The material properties illustrated in the data sheets are defined by toroidal cores for each material grad.

## The Spinel Lattice:

The following figure shows a unit cell of the spinel lattice and the sites of various ions. The spinel structure consists of a number of interlaced face-centered cubic lattices. These interlaced lattices are called sub-lattices and they play an important role in the magnetism of ferrites. In a unit cell of spinel crystal structure of ferrites, one metal ion (e.g.  $\text{Fe}^{2+}$ ,  $\text{Ni}^{2+}$ ,  $\text{Mn}^{2+}$  etc.) is on tetrahedral (A) site and two (e.g.  $\text{Fe}^{3+}$ ,  $\text{Zn}^{2+}$ ) are on octahedral (B) sites. If the spinel were 'normal', the divalent Me ion would occupy the A site while the trivalent Fe ions would occupy the B sites. In an 'inverse' spinel the divalent Me ion occupies one of the B sites while the trivalent Fe ions occupy the other B site and the A site. Many of the commercially important ferrites, such as MnZn-ferrites and NiZn-ferrites, are 'inverse' spinels. In ferrite manufacturing both composition and process conditions are crucial to get the required properties.

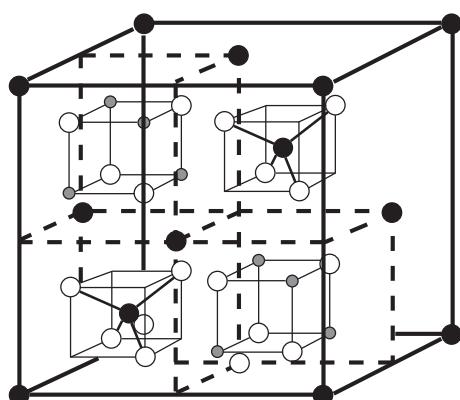


○ Oxygen

● B-atoms octahedral sites

■ A-atoms tetrahedral sites

## Ferrimagnetism:

Ferrimagnetism is the term proposed by Néel to describe the magnetism of ferrites. Ferrites behave ferrimagnetism due to the fact that there are net magnetic moments in molecular level as a result of the electronic interactions, called **superexchange**, between metal and oxygen ions. In a bulk ferrite, the crystallite is normally divided into a number of magnetic domains (known as Weiss domains) of various spin orientations, so that there is very little external field arising from the internal magnetization in the crystallite of ferrite polycrystalline structures, i.e. the **demagnetizing fields** are small. If a magnetic field is applied to the ferrite bulk along its magnetic path, the movements of the domain walls which are irreversible will occur. Due to the irreversible domain wall movements the magnetization will always lag behind the magnetizing field and an open loop will be traced, known as magnetic hysteresis, and the loop is called a **hysteresis loop**.

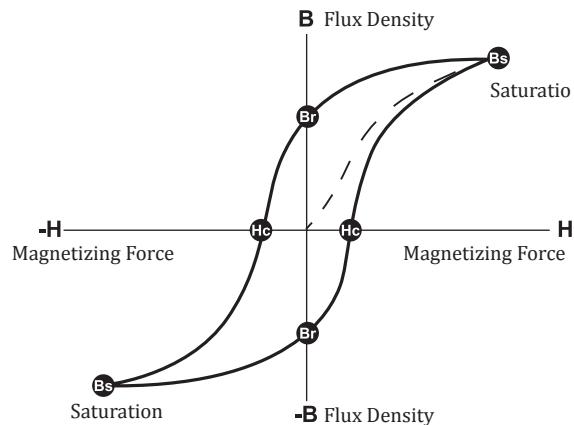


## MAGNETIC PROPERTIES

This section is devoted to a brief glimpse of some important features of MnZn-ferrites and NiZn-ferrites for our valued customers.

### 1. B-H HYSTERESIS LOOP

It is more usual to consider the dependence of the flux density on field strength. If an alternating field is applied to a soft magnetic material, a hysteresis loop will be obtained. Such a B-H curve is shown behind. If the field strength is large enough to make the material magnetization unable to increase further, the maximum attainable flux density is then reached. This is known as the **saturation flux density**,  $B_s$ . If the field is removed, the material returns to a state where a certain flux density remains. The intercept of the hysteresis loop with the B-axis is referred to as the **remanence**,  $B_r$ , of the material, while the intercept with the H-axis is referred to as the **coercivity**,  $H_c$ .

The ease with which the magnetization may be changed by a given magnetic field depends on the anisotropy and the movement of domain wall pinned by the imperfection of the polycrystalline structure, i.e. magnetic stiffness. The energy consumed to overcome the internal magnetic stiffness during the cyclic magnetization process is indicated by the area of the B-H loop and is called **hysteresis loss**.

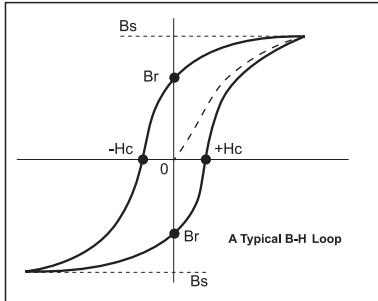

### 2. MAGNETIZATION

Under the influence of an applied field ( $H$ ) the magnetic moment of the ions comprising the material are re-oriented, either by the growth and contraction of the various domains, so that ionic moments effectively augment the applied field. This increase in magnetic field is called the magnetization ( $M$ ) and it is expressed in A/m (unit in SI hereafter). The resulting flux density ( $B$ ) is composed of that of free space plus the contribution of the magnetization due to the aligned domains in the material and can be expressed as  $B = \mu_0 (H+M)$  where  $\mu_0 = 4\pi \times 10^{-7}$  H/m. The quotient of flux density and applied field is called **absolute permeability** denoted by  $\mu$ :

$$\mu = \frac{B}{H} = \mu_0 \left( 1 + \frac{M}{H} \right)$$

The absolute permeability is normally expressed as the product of the magnetic constant of free space,  $\mu_0$ , and the **relative permeability**,  $\mu_r$ :

$$\mu = \mu_0 \cdot \mu_r$$

where

$$\mu_r = 1 + \frac{M}{H} = 1 + \chi_r$$

In the above equation  $\chi_r$  is the **relative susceptibility** used normally to classify the various kinds of magnetism (e.g. diamagnetism, paramagnetism, antiferromagnetism, ferromagnetism and ferrimagnetism). Since there are a variety of qualifying subscripts of relative permeability correlated with testing conditions, it is then convenient to drop 'relative' so that the index 'r' is generally replaced by the applicable symbol e.g.  $\mu_i$ ,  $\mu_a$ ,  $\mu_\alpha$  etc. for each specific behavior under the concerned testing conditions.

### 3. PERMEABILITY


The **initial permeability**,  $\mu_i$ , is measured in a closed magnetic circuit, usually a toroidal core, at very low field strength,  $\Delta H$ , without bias:

$$\mu_i = \frac{1}{\mu_0} \times \left( \frac{\Delta B}{\Delta H} \right)_{\Delta H \rightarrow 0}$$

Sometimes for the application purpose the core has to be gapped. The effect of an air gap is to change the horizontal scale of the B-H relation of a given core so that the B-H loop is less inclined relative to the horizontal, and this is consistent with a reduction of the concerned permeability at the same test condition. This effect is referred to as the shearing of the B-H relation and applies to both initial magnetization and the hysteresis loop. In such a case the **effective permeability**,  $\mu_e$ , is introduced as follows:

$$\mu_e = \frac{\mu_i}{1 + \frac{G \cdot \mu_i}{l_e}}$$


Where  $G$  is the air gap and  $l_e$  is the effective magnetic path length. The relationship between higher field strength,  $\hat{H}$ , and flux densities,  $\hat{B}$ , without the presence of a bias field is given by the **amplitude permeability**,  $\mu_a$ :

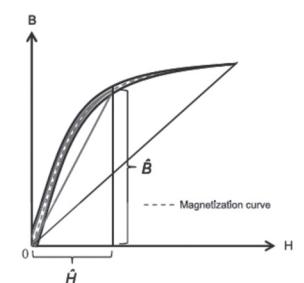

$$\mu_a = \frac{1}{\mu_0} \times \left( \frac{\hat{B}}{\hat{H}} \right)$$

When an alternating magnetic field is superimposed on a static bias field,  $H_{DC}$ , the permeability observed is called **incremental permeability**,  $\mu_\Delta$ :

$$\mu_\Delta = \frac{1}{\mu_0} \times \left( \frac{\Delta B}{\Delta H} \right)_{H_{DC}}$$

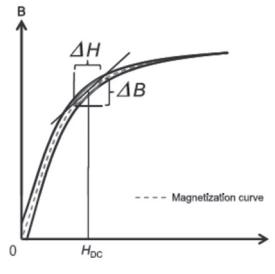

If the amplitude of the alternating field  $\Delta H$  is negligibly small, the permeability is then called **reversible permeability**,  $\mu_{rev}$ . Once the bias  $H_{DC}$  approximates to 0, the reversible permeability will revert to initial permeability. The behavior of the reversible permeability is normally shown in the characteristic curves with the subject of 'Permeability v.s. DC Bias field' for the metal dust cores featuring distributed gap.

#### 4. INDUCTANCE FACTOR

To make the calculation of the inductance of a coil more convenient, the inductance factor, known as the  $AL$  value, is given in the data sheets (unit in nH: nano-Henry). The inductance of the wound core then can be defined as follows,

$$L = N^2 \times AL$$

where  $N$  is the winding turns of the coil.  $AL$  value is calculated using the effective core parameters ( $A_e$  and  $l_e$ ) and the initial or effective permeability:

$$AL = \frac{\mu_0 \mu_i \cdot A_e}{l_e}$$

where  $A_e$  and  $l_e$  for the specific core type can be found in the data sheets. For the gapped ferrite cores and metal dust cores, the  $\mu_i$  will be replaced by  $\mu_e$ .

#### 5. DISACCOMMODATION FACTOR

If a magnetic material is given a disturbance, which may be magnetic, thermal or mechanical, the initial permeability observed right after the cessation of the disturbance is normally found to be raised to an unstable value from which it returns to its stable value as a function of time. This phenomenon is usually referred to as **disaccommodation**. There are a number of possible mechanisms of disaccommodation in ferrites and they all depend on migratory processes within the lattices of the polycrystalline structure. These processes often involve the anisotropy or preferred distribution of ferrous ions and/or cation vacancies over the four octahedral sublattices of the spinel lattice.

Because it is observed that the change of permeability is approximately proportional to the logarithm of time, the IEC Technical Committee 1 (Terminology) defines a **disaccommodation coefficient** of permeability as

$$d = \frac{\mu_1 - \mu_2}{\mu_1 \cdot \log_{10} \left( \frac{t_2}{t_1} \right)}$$

where  $t_1$  and  $t_2$  are arbitrary but defined time intervals after the disturbance. And the **disaccommodation factor** is defined as

$$D_F = \frac{d}{\mu_1}$$

#### 6. TEMPERATURE FACTOR

The permeability of a magnetic material may change for a variety of reasons. The most obvious cause of variation is the change of temperature. Over a limited temperature range the reversible variation of permeability with temperature can be described by a **temperature coefficient**,  $\alpha_\mu$ :

$$\alpha_\mu = \frac{\Delta \mu}{\sqrt{\mu_1 \mu_2} \cdot \Delta T}$$

where  $\mu_1$  and  $\mu_2$  are the permeability measured at different temperature. If the range of temperature,  $\Delta T$ , is small and  $\Delta \mu / \sqrt{\mu_1 \mu_2}$  is not appreciable, the above expression can be simplified as:

$$\alpha_\mu = \frac{\Delta \mu}{\mu \cdot \Delta T}$$


When an air gap is inserted into a magnetic circuit so that the permeability is reduced to the effective value,  $\mu_e$ , the effect of permeability variations are reduced in the ratio  $\mu_e / \mu_i$ . It is then convenient to divide the temperature coefficient by  $\mu_i$  so that the temperature coefficient of effective permeability at gapped condition can be obtained by simply multiplying the new factor by  $\mu_e$ . The new factor designated as **temperature factor of reluctivity** by IEC Technical Committee 1 has the symbol  $\alpha_F$ :

$$\alpha_F = \frac{\Delta \mu_i}{\mu_i^2 \cdot \Delta T} \text{ or } \frac{\Delta \mu}{\mu_1 \mu_2 \cdot \Delta T}$$

Normally the initial permeability rises with temperature until it reaches a peak just below the Curie temperature,  $T_c$ . Over the  $T_c$  the permeability falls abruptly to values approaching unity due to disordering of magnetic moments by thermal energy and the material becomes paramagnetic.

## 7. COMPLEX PERMEABILITY

The equivalent circuit model is normally used to characterize the properties of electronic components. There are two approaches to describe the behavior of inductors with ignorance of winding resistance and parasitic capacitance so that the concerned properties of magnetic core materials can be realized. One is series mode with  $R_s$  and  $L_s$  where  $R_s$  is the series core loss resistance and  $L_s$  is the series inductance. The alternative is parallel mode with  $R_p$  and  $L_p$  where  $R_p$  is the parallel core loss resistance and  $L_p$  is the parallel inductance. Both of the two approaches are equivalent but the mathematical process of the series mode is more brief. Thus, the series mode is adopted to characterize the low-amplitude properties by most of the ferrite manufacturers.

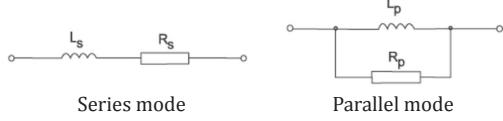

The preliminary theory of inductance may be defined by the linkage of magnetic flux change by applying the alternating current in the coil:

$$L = \frac{N \cdot \Delta\phi}{\Delta I}$$

where  $\Delta\phi$  is the variation of the flux induced in the wound coil with  $N$  turns by applying the alternating current,  $\Delta I$ , on the wire. The basic inductance formula can be rewritten as follows,

$$L = N^2 \cdot \frac{A_e}{l_e} \cdot \frac{\Delta B}{\Delta H} = \frac{\mu_0 \cdot \mu_r \cdot N^2 \cdot A_e}{l_e} = L_o \cdot \mu_r$$

where  $L_o$  is the virtual inductance and supposed to be measured if the core had unity permeability with the flux distribution in its original magnetic circuit remaining unchanged. The unit of inductance  $L$  is in Henry(H),  $A_e$  in meter square( $m^2$ ),  $l_e$  in meter(m) and  $\mu_0 = 4\pi \times 10^{-7}$  H/m. The total impedance of the inductance circuit model in series mode is the combination of pure inductive reactance and core loss resistance:

$$Z = j\omega L_s + R_s \text{ (unit in } \Omega)$$

where the angular frequency,  $\omega$ , equals  $2\pi f$  with the frequency unit in Hertz (Hz). In comparison to the inductive reactance,  $j\omega L_s = j\omega L_o \cdot \mu_r$ , the impedance can be rewritten as follows,

$$Z = j\omega L_o \left( \mu_r - j \frac{R_s}{\omega L_o} \right) = j\omega L_o (\mu'_s - j\mu''_s)$$

where  $\mu'_s$ , the real part of the complex permeability, equals  $\mu_r$  and  $\mu''_s$ , the imaginary part of the complex permeability, equals  $R_s/\omega L_o$ . The form of complex permeability is obtained. The impedance value can be calculated as follows,

$$|Z| = \omega L_o \sqrt{\mu'^2_s + \mu''^2_s}$$

It then can be realized that the core loss related part,  $\mu''_s$ , plays one of the crucial roles of impedance behavior as well. The above equation provides a convenient way to check the impedance spectrum through the concerned material grade by complex permeability, core geometry by  $A_e/l_e$  and winding turns by  $N$  with the ignorance of parasitic effects due to winding.

## 8. RESONANT FREQUENCY

In the complex permeability spectrum of  $\mu'_s$  and  $\mu''_s$  it normally can be observed that  $\mu''_s$  rises to a pronounced peak as  $\mu'_s$  falls. This dispersion is mainly due to **dimensional resonance** and **ferromagnetic resonance**. Concerning the dimensional resonance, the high values of permeability and **permittivity** (in a typical MnZn-ferrite,  $\epsilon_r=10^5$ ) of ferrites give rise to standing electromagnetic waves within the ferrite if the smallest cross-sectional dimension of the ferrite core is half the wave length. Under this condition the net reactive flux is zero and it leads to  $\mu'_s$  dropping down to zero at certain frequency. As to ferromagnetic resonance (**spin precession resonance**) due to the fact that the origin of ferromagnetism is not an orbital motion but a spin motion of the electron, the atomic magnetic moment has angular momentum which is similar to the behavior of a top. When a spinning top is placed in a gravitational field, it precesses. This phenomenon is called **gyromagnetic effect**. It is found that the frequency of ferromagnetic resonance varies inversely as the initial permeability, known as Snoek's law. The frequency at which  $\mu''_s$  rises to the maximum is about the one that ferromagnetic resonance occurs.

For practical inductor measurement, as the frequency increases the measured inductance might remain level at first and then rise to a sharp peak before falling rapidly to negative values. The frequency at which the inductance swing happens is called **self-resonant frequency** of an inductor and is normally lower than the dimensional and ferromagnetic resonance frequency of the core. The self-resonant frequency is mainly due to winding parasitic/stray capacitance of the coil. To avoid the influence of self-resonance phenomenon on measurement, the IEC

publication (IEC 62044-2) specifies the testing frequency to be far below the self-resonant frequency of the wound cores.

## 9. LOSS TANGENT

At the condition of low-amplitude measurement the common methods to indicate ferrite performance as a function of frequency is to characterize not only the complex permeability but also the value of  $\tan\delta_m$ , known as loss tangent. The total magnetic loss tangent can be expressed as follows,

$$\tan\delta_m = \frac{R_s}{\omega L_s} = \frac{\mu''_s}{\mu'_s}$$

where  $\delta_m$  is the loss angle, i.e. the phase angle between  $B$  and  $H$ . There are also some standard expressions on the quotient of loss angle and permeability, called **loss factors** by IEC Technical Committee 51 as follows,

$$\frac{\tan\delta_m}{\mu} = \frac{\tan\delta_h}{\mu} + \frac{\tan\delta_F}{\mu} + \frac{\tan\delta_r}{\mu}$$

where the total loss factor is the sum over hysteresis loss, eddy current loss and residual loss factors respectively.

## 10. QUALITY FACTOR

To characterize the circuit/network performance the quality factor (Q-factor hereafter) is normally used as one of the important measures. Through the inductance circuit model in series or parallel mode the Q-factor of wire-wound magnetic cores can be defined as follows,

$$Q = \frac{\omega L_s}{R_s} = \frac{R_p}{\omega L_p}$$

which is just the inverse of loss tangent. For practical inductors the term  $R_{s/p}$  involves the winding resistance as well. As a result of that, Q-factor is dependent on the testing frequency, winding condition and core loss.

## 11. RESISTIVITY

The resistivity,  $\rho$ , of ferrites ranging from  $1\Omega\text{-m}$  to greater than  $10^6\Omega\text{-m}$  is dependent on the chemical compounds. NiZn-ferrites feature high resistivity ( $>10^6\Omega\text{-m}$ ) while MnZn-ferrites behave much lower span over several  $\Omega\text{-m}$ . The partial short-circuit due to electron hopping between the grain boundaries of polycrystalline ferrites creates significant eddy current loss at high frequencies and gives rise to dispersion of permeability, resulting the reduction of impedance. This phenomenon normally happens to MnZn-ferrites featuring much lower impedance at high frequencies. The DC resistivity of each material grade shown in the data sheets is measured at room temperature.

## 12. CORE CONSTANTS

A recent IEC publication (IEC 60205) lists standard formulae for calculating core constants and effective dimensions for a number of widely used core shapes. For a non-uniform core, an equivalent ideal toroid is introduced hypothetically to get effective core parameters,  $A_e$  and  $l_e$ , through its core constants:

$$C_1 = \sum_i \frac{l_i}{A_i} \text{ and } C_2 = \sum_i \frac{l_i}{A_i^2}$$

These constants give rise to the calculation of  $A_e = C_1/C_2$  and  $l_e = C_2^2/C_1$ .  $C_1$  is also used to calculate inductance factor of a core configuration without gap through


$$AL(\text{nH}) = \frac{4\pi\mu_i \cdot 10^{-1}}{C_1}$$

with the unit of  $C_1$  in  $\text{mm}^{-1}$ . If air gap is concerned,  $\mu_i$  should be replaced by  $\mu_e$  in the above equation.

## FERRITE MANUFACTURING PROCESS

Ferrite cores are manufactured to meet the requirements of customers. The effect of the process variables on the properties of ferrite pieces have always been a subject of great importance. The major factors include the purity of the constituent oxides, their proportions and homogeneity in the powder mix and the control of temperature and atmosphere during sintering.

### Manufacturing flow sheet

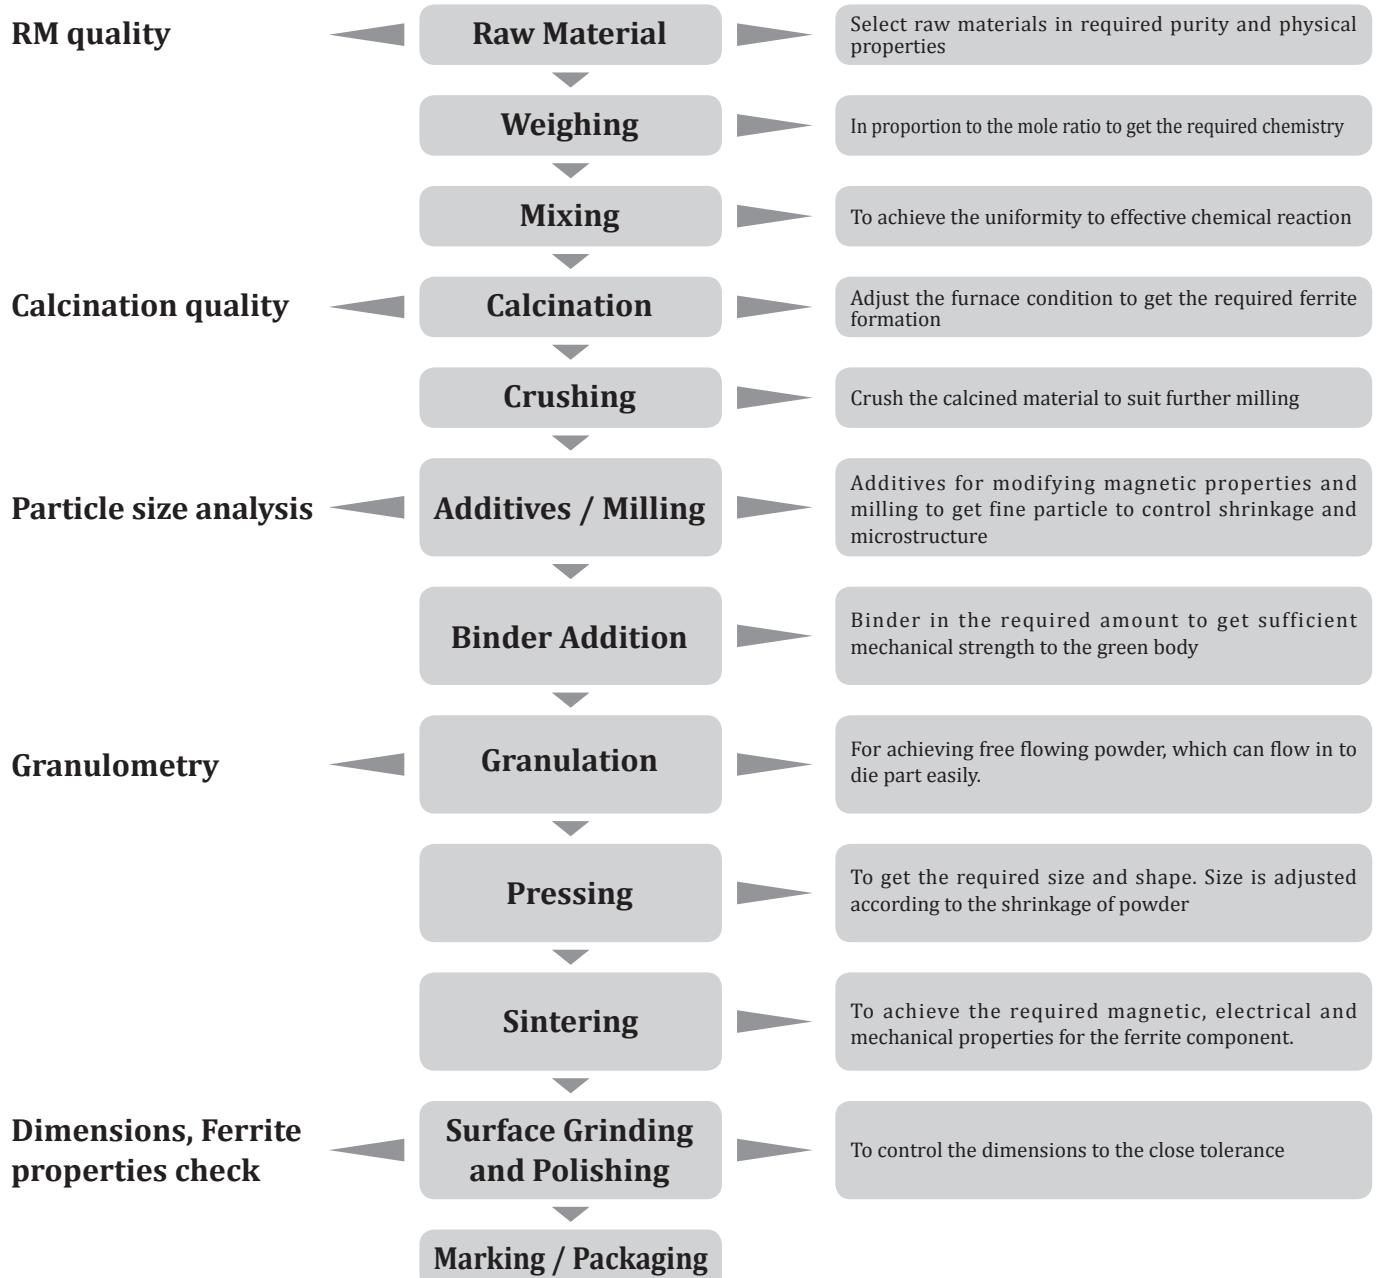

## MnZn-ferrite power materials

Features	Grade	Initial Permeability $\mu_i$	Saturation Flux Density Bs (mT)	Remanence Br (mT)	Coercivity Hc (A/m)	Curie Temperature Tc (°C)	Resistivity $\rho$ ( $\Omega \cdot m$ )	Page
Conventional Low Loss	P4	2500	480	135	14	220	5.50	20
	P41	2400	495	170	13	230	4.00	21
	P42	1800	520	230	13	240	8.00	22
	P48	2500	515	150	13	220	5.00	23
Wide temp. Low Loss	P45	3100	530	80	8	215	5.00	24
	P451	3800	540	70	8	215	5.00	25
	P452	3000	520	100	13	215	5.00	26
	P47	3000	520	100	11	220	5.00	27
High Bs	P49	1700	540	280	15	280	3.00	28
	P491	1500	600	140	21	300	5.00	29
	P492	2500	530	100	12	245	5.00	30
High Frequency Low Loss	P5	2000	470	135	17	220	6.40	31
	P51	1500	490	215	35	250	12.00	32
	P52	2000	500	140	21	250	6.50	33
	P53	1200	515	180	38	280	10.00	34
	P61	900	515	200	50	280	10.00	35
	P63	750	540	205	50	280	10.00	36

## MnZn-ferrite hi-permeability materials

Features	Grade	Initial Permeability $\mu_i$	Saturation Flux Density Bs (mT)	Remanence Br (mT)	Temperature Factor $\alpha_F$ ( $\times 10^{-6}/^\circ C$ )	Curie Temperature Tc (°C)	Resistivity $\rho$ ( $\Omega \cdot m$ )	Page
Conventional High $\mu$ for CM Chokes	A10	10000	410	140	-0.5~1	130	0.15	37
	A121	12000	380	130	-0.5~1	110	0.12	38
	A13	12000	400	120	-1~1	125	0.15	39
	A151	15000	400	220	-1~1	110	0.10	40
Wide Band Filter	A05	5000	440	80	0~2	140	0.20	41
	A06	6000	420	70	0~2.5	140	0.20	42
	A07	7000	400	150	-1~1	130	0.35	43
	A071	7000	440	80	-1~1	145	0.35	44
	A102	10000	380	95	-1~1	120	0.15	45
	A103	10000	420	70	1~2	130	0.15	46
High $\mu$ & Tc for Automotives	A072	7000	485	95	-1.5~1.5	180	0.20	47
	A104	10000	460	105	-1.5~0	155	0.15	48
High $\mu$ Wide Temperature	A044	4000	450	55	-1~1	170	1.00	49
	A064	6000	470	135	-1~1	170	1.00	50
	N10	10000	380	160	-1~1	100	0.12	51

## MnZn-ferrite telecommunication materials

Features	Grade	Initial Permeability $\mu_i$	Saturation Flux Density Bs (mT)	Remanence Br (mT)	Loss Factor $\tan\delta/\mu$ ( $\times 10^{-6}$ )	Curie Temperature Tc (°C)	Resistivity $\rho$ ( $\Omega \cdot m$ )	Page
For Wide Temp. LAN	A043	4500	460	65	<10	160	0.20	52
	A062	6000	460	100	<30	160	0.20	53
	N07	7000	400	70	<30	130	0.15	54
Low THD	A101	10000	400	175	<90	130	0.15	55
Low $\eta_B$	N4	2500	450	180	<3	170	7.50	56
	N42	3800	530	100	<2.5	250	5.00	57
	N43	750	490	400	<15	250	2.00	58

## MnZn-ferrite EMI suppression materials

Features	Grade	Initial Permeability $\mu_i$	Saturation Flux Density Bs (mT)	Remanence Br (mT)	Temperature Factor $\alpha_F$ ( $\times 10^{-6}/^\circ C$ )	Curie Temperature Tc (°C)	Resistivity $\rho$ ( $\Omega \cdot m$ )	Page
EMI Filter	N5	2000	370	240	<1.1	130	140	59

## NiZn-ferrite EMI suppression materials

Features	Grade	Initial Permeability $\mu_i$	Saturation Flux Density Bs (mT)	Remanence Br (mT)	Coercivity Hc (A/m)	Curie Temperature Tc (°C)	Resistivity $\rho$ ( $\Omega \cdot m$ )	Page
Automotive EMI Suppression	<b>K081</b>	800	400	280	21	190	$10^6$	60
	<b>K10</b>	1000	355	250	19	160	$10^6$	61
	<b>K12</b>	1200	355	250	12	160	$10^6$	62
	<b>K13</b>	1300	340	190	16	150	$10^6$	63
	<b>K15</b>	1500	330	200	11	130	$10^6$	64
	<b>K151</b>	1500	290	150	20	110	$10^6$	65
	<b>K20</b>	2000	300	150	11	100	$10^6$	66
	<b>K25</b>	2500	275	170	14	90	$10^6$	67
	<b>D1C</b>	350	360	255	31	160	$10^6$	68
Automotive EMI Suppression	<b>D25</b>	500	390	260	58	180	$10^6$	69
	<b>D27</b>	700	365	235	20	150	$10^6$	70
	<b>D28</b>	800	365	180	26	150	$10^6$	71
	<b>D30</b>	1000	340	115	28	140	$10^6$	72
	<b>D35</b>	1100	305	140	22	120	$10^6$	73
	<b>D37</b>	1500	290	150	20	110	$10^6$	74
	<b>D40</b>	2000	275	115	8	90	$10^6$	75
	<b>A30</b>	300	435	300	68	250	$10^6$	76
	<b>A31</b>	300	435	180	52	250	$10^6$	77
Conventional High Bs	<b>A40</b>	400	430	320	62	250	$10^6$	78
	<b>A50</b>	500	330	125	56	150	$10^6$	79
	<b>B30</b>	300	470	250	80	300	$10^6$	80
	<b>B40</b>	400	430	300	45	240	$10^6$	81
Automotive High Bs	<b>B45</b>	450	450	270	49	240	$10^6$	82
	<b>B60</b>	600	430	300	40	210	$10^6$	83
	<b>L1</b>	150	410	170	105	250	$10^6$	84
	<b>L2</b>	75	420	275	140	250	$10^6$	85
Low Permeability	<b>L3</b>	20	305	120	600	300	$10^6$	86
	<b>L4</b>	50	395	255	200	300	$10^6$	87
	<b>L5</b>	120	390	175	140	250	$10^6$	88
	<b>L6</b>	14	265	175	1540	300	$10^6$	89

## NiZn-ferrite RFID/antenna materials

Features	Grade	Initial Permeability $\mu_i$	Saturation Flux Density Bs (mT)	Remanence Br (mT)	Coercivity Hc(A/m)	Curie Temperature Tc (°C)	Resistivity $\rho$ ( $\Omega \cdot m$ )	Page
Rod Core For Antenna	<b>H2</b>	50	400	195	155	300	$10^6$	90
	<b>H3</b>	100	330	225	95	250	$10^6$	91
	<b>H5</b>	250	410	295	40	250	$10^6$	92
	<b>H5M</b>	230	430	250	75	280	$10^6$	93
	<b>H5R</b>	200	400	290	55	240	$10^6$	94
	<b>H5N</b>	300	390	260	155	200	$10^6$	95
Wide Temperature RFID	<b>F10</b>	100	330	185	220	170	$10^6$	96
	<b>F52</b>	410	325	140	90	140	$10^6$	97
	<b>F80</b>	800	360	155	45	150	$10^6$	98
	<b>F100</b>	1000	335	140	33	130	$10^6$	99

## MgZn-ferrite RFID/antenna materials

Features	Grade	Initial Permeability $\mu_i$	Saturation Flux Density Bs (mT)	Remanence Br (mT)	Coercivity Hc (A/m)	Curie Temperature Tc (°C)	Resistivity $\rho$ ( $\Omega \cdot m$ )	Page
Rod Core For Antenna	<b>H3A</b>	125	320	235	80	230	$10^6$	100
	<b>H3B</b>	150	330	245	90	220	$10^6$	101
	<b>H4</b>	300	330	205	55	160	$10^6$	102

## MgZn-ferrite EMI suppression materials

Features	Grade	Initial Permeability $\mu_i$	Saturation Flux Density Bs (mT)	Remanence Br (mT)	Coercivity Hc (A/m)	Curie Temperature Tc (°C)	Resistivity $\rho$ ( $\Omega \cdot m$ )	Page
EMI Filter	<b>M80</b>	800	315	215	17	140	$10^6$	103



## ■ Material Characteristics (1)

	Symbol	Unit	Measuring Conditions			Conventional Low Loss Materials			
			Freq.	Flux den.	Temp.	P4	P41	P42	P48
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$2500 \pm 25\%$	$2400 \pm 25\%$	$1800 \pm 25\%$	$2500 \pm 25\%$
<b>Amplitude Permeability</b>	$\mu_a$		25kHz	200mT	25°C	>4500	>4500	>5000	>5000
					100°C	>4500	>4500	>5000	>5000
<b>Power Loss</b>	Pv	KW/m <sup>3</sup>	25kHz	200mT	25°C	105	125	125	-
					100°C	55	50	50	-
			100kHz	200mT	25°C	630	650	750	550
					100°C	450	350	350	250
			300kHz	100mT	25°C	660	820	900	570
					100°C	430	500	500	330
			500kHz	50mT	25°C	380	400	450	250
					100°C	330	300	300	200
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	480	495	520	515
					100°C	380	395	420	410
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	135	170	230	150
					100°C	75	55	60	55
<b>Coercivity</b>	Hc	A/m	10kHz	H = 1200A/m	25°C	14	13	13	13
					100°C	9	6	8	6
<b>Hysteresis Material Constant</b>	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	<1.2	<1	<1	<1
<b>Disaccommodation Factor</b>	D <sub>F</sub>	$10^{-6}$	10kHz	<0.25 mT	25°C	<2	<2	<2	<2
<b>Curie Temperature</b>	T <sub>c</sub>	°C				$\geq 220$	$\geq 230$	$\geq 240$	$\geq 220$
<b>Resistivity</b>	$\rho$	Ωm				5.50	4.00	8.00	5.00
<b>Density</b>	d	g/cm <sup>3</sup>				4.80	4.85	4.90	4.90

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (2)

	Symbol	Unit	Measuring Conditions			Wide Temperature Low Loss Materials			
			Freq.	Flux den.	Temp.	P45	P451	P452	P47
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$3100 \pm 25\%$	$3800 \pm 25\%$	$3000 \pm 25\%$	$3000 \pm 25\%$
<b>Amplitude Permeability</b>	$\mu_a$		25kHz	200mT	25°C	>5000	>5000	>3900	>4500
					100°C	>5000	>5000	>4450	>4500
<b>Power Loss</b>	Pv	KW/m <sup>3</sup>	100kHz	200mT	25°C	360	270	310	340
					100°C	260	310	380	350
			300kHz	100mT	25°C	400	295	300	350
					100°C	350	385	260	350
			500kHz	50mT	25°C	200	165	100	230
					100°C	200	230	120	230
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	530	540	520	520
					100°C	405	420	415	420
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	80	70	100	100
					100°C	50	40	80	70
<b>Coercivity</b>	Hc	A/m	10kHz	H = 1200A/m	25°C	8	8	13	11
					100°C	5	6	11	8
<b>Hysteresis Material Constant</b>	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	<0.6	<0.6	<0.6	<0.6
<b>Disaccommodation Factor</b>	D <sub>F</sub>	$10^{-6}$	10kHz	<0.1 mT	25°C	<1	<1	<1	<1
<b>Curie Temperature</b>	T <sub>c</sub>	°C				$\geq 215$	$\geq 215$	$\geq 215$	$\geq 220$
<b>Resistivity</b>	$\rho$	Ωm				5.00	5.00	5.00	5.00
<b>Density</b>	d	g/cm <sup>3</sup>				4.90	4.90	4.85	4.90

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.



## Material Characteristics (3)

	Symbol	Unit	Measuring Conditions			High Bs Materials			
			Freq.	Flux den.	Temp.	P49	P491	P492 NEW	
Initial Permeability	$\mu_i$	Pv KW/m <sup>3</sup>	$\leq 10\text{kHz}$	0.25mT	25°C	$1700 \pm 25\%$	$1500 \pm 25\%$	$2500 \pm 25\%$	
Power Loss	Pv KW/m <sup>3</sup>		25kHz	200mT	25°C	-	160	-	
					100°C	-	240	-	
			100kHz	200mT	25°C	800	900	490	
					100°C	400	1390	425	
			300kHz	100mT	25°C	-	-	465	
					100°C	-	-	365	
			500kHz	50mT	25°C	450	250	215	
					100°C	220	560	175	
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	540	600	530	
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	280	140	100	
Coercivity	Hc	A/m	10kHz	H = 1200A/m	100°C	50	235	70	
Curie Temperature	Tc	°C				$\geq 280$	$\geq 300$	$\geq 245$	
Resistivity	$\rho$	Ωm				3.00	5.00	5.00	
Density	d	g/cm <sup>3</sup>				4.90	4.90	4.90	

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## Material Characteristics (4)

	Symbol	Unit	Measuring Conditions			High Frequency Low Loss Materials						
			Freq.	Flux den.	Temp.	P5	P51	P52	P53	P61	P63	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$2000 \pm 25\%$	$1500 \pm 25\%$	$2000 \pm 25\%$	$1200 \pm 25\%$	$900 \pm 25\%$	$750 \pm 25\%$	
Amplitude Permeability	$\mu_a$	Pv KW/m <sup>3</sup>	25kHz	200mT	25°C	> 4000	> 2500	> 4000	> 1900	> 1700	> 1700	
Power Loss	Pv KW/m <sup>3</sup>				100°C	> 4000	> 2500	> 4000	> 2000	> 1800	> 1800	
	300kHz		100mT	25°C	600	410	510	350	-	-		
				100°C	350	370	450	310	-	-		
	500kHz		50mT	25°C	220	200	150	80	-	-		
				100°C	250	100	140	60	-	-		
	700kHz		50mT	25°C	600	300	300	-	-	-		
				100°C	550	250	350	-	-	-		
	1MHz		50mT	25°C	-	600	750	300	250	80		
				100°C	-	600	1000	300	110	80		
	2MHz		80mT	25°C	-	-	-	-	-	1600		
				100°C	-	-	-	-	-	2000		
	3MHz		10mT	25°C	-	-	-	-	50	20		
				100°C	-	-	-	-	50	20		
	3MHz		30mT	25°C	-	-	-	-	450	200		
				100°C	-	-	-	-	370	250		
	5MHz		9mT	25°C	-	-	-	-	150	80		
				100°C	-	-	-	-	170	80		
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	470	490	500	515	515	540	
					100°C	350	400	400	420	430	450	
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	135	215	140	180	200	205	
					100°C	70	125	110	120	135	115	
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	17	35	21	38	50	50	
					100°C	10	27	18	33	40	40	
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1	< 1	< 1	< 1	< 1	< 1	
Disaccommodation Factor	D <sub>f</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2	< 2	< 2	< 2	< 2	< 2	
Curie Temperature	Tc	°C				$\geq 220$	$\geq 250$	$\geq 250$	$\geq 280$	$\geq 280$	$\geq 280$	
Resistivity	$\rho$	Ωm				6.40	12.00	6.50	10.00	10.00	10.00	
Density	d	g/cm <sup>3</sup>				4.70	4.85	4.85	4.80	4.80	4.80	

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (5)

	Symbol	Unit	Measuring Conditions			Conventional High $\mu$ For CM Chokes Materials			
			Freq.	Flux den.	Temp.	A10	A121	A13	A151
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$10000 \pm 30\%$	$12000 \pm 30\%$	$12000 \pm 30\%$	$15000 \pm 30\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 10	< 10	< 8	< 10
			100kHz		25°C	< 60	< 60	< 40	< 110
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	410	380	400	400
					100°C	210	180	200	170
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	140	130	120	220
					100°C	110	110	65	100
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	0 ~ 1.5	0 ~ 1.5	1 ~ 3	-1 ~ 1
					20 ~ 70°C	-0.5 ~ 1	-0.5 ~ 1	-1 ~ 1	-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5	< 0.5	< 0.5	< 0.5
Disaccommodation Factor	$D_F$	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2	< 2	< 2	< 2
Curie Temperature	Tc	°C				$\geq 130$	$\geq 110$	$\geq 125$	$\geq 110$
Resistivity	$\rho$	Ωm				0.15	0.12	0.15	0.10
Density	d	g/cm³				4.90	4.90	4.90	5.00

Remark: Best impedance, and permeability v. s. frequency performance for  $10,000\mu_i$  materials.

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (6)

	Symbol	Unit	Measuring Conditions			Wide Band Filter Materials					
			Freq.	Flux den.	Temp.	A05	A06	A07	A071	A102	A103 NEW
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$5000 \pm 25\%$	$6000 \pm 25\%$	$7000 \pm 25\%$	$7000 \pm 25\%$	$10000 \pm 30\%$	$10000 \pm 30\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 4	< 4	< 8	< 8	< 10	< 10
			100kHz		25°C	< 15	< 15	< 30	< 30	< 60	< 30
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	440	420	400	440	380	420
					100°C	300	280	200	280	180	220
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	80	70	150	80	95	70
					100°C	90	80	110	60	75	65
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	0 ~ 2	0 ~ 2.5	-1~1	-1~1	-1 ~ 1	1 ~ 2
					20 ~ 70°C	0 ~ 2	0 ~ 2.5	-1~1	-1~1	-1 ~ 1	-0.5 ~ 0.5
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.8	< 0.8	< 1.2	< 1.2	< 1	< 0.5
Disaccommodation Factor	$D_F$	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 3	< 3	< 2	< 2	< 2	< 2
Curie Temperature	Tc	°C				$\geq 140$	$\geq 140$	$\geq 130$	$\geq 145$	$\geq 120$	$\geq 130$
Resistivity	$\rho$	Ωm				0.20	0.20	0.35	0.35	0.15	0.15
Density	d	g/cm³				4.85	4.85	4.90	4.90	4.90	4.90

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (7)

	Symbol	Unit	Measuring Conditions			High $\mu$ & Tc For Automotives Materials	
			Freq.	Flux den.	Temp.	A072	A104
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$7000 \pm 25\%$	$10000 \pm 30\%$
<b>Relative Loss Factor</b>	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 5	< 10
			100kHz		25°C	< 15	< 30
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	485	460
					100°C	340	295
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	95	105
					100°C	80	105
<b>Temperature Factor of Permeability</b>	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	1.5 ~ 3.5	1 ~ 3
					20 ~ 70°C	-1.5 ~ 1.5	-1.5 ~ 0
<b>Hysteresis Material Constant</b>	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1.0	< 0.5
<b>Disaccommodation Factor</b>	D <sub>F</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 1.0	< 2.0
<b>Curie Temperature</b>	T <sub>c</sub>	°C				$\geq 180$	$\geq 155$
<b>Resistivity</b>	$\rho$	Ωm				0.20	0.15
<b>Density</b>	d	g/cm <sup>3</sup>				4.90	4.90

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (8)

	Symbol	Unit	Measuring Conditions			High $\mu$ Wide Temperature Materials		
			Freq.	Flux den.	Temp.	A044	A064	N10
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$4000 \pm 25\%$	$6000 \pm 25\%$	$10000 \pm 30\%$
					-20°C	-	-	> 9000
<b>Relative Loss Factor</b>	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 8	< 8	< 10
					25°C	< 40	< 40	< 90
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	450	470	380
					100°C	315	330	130
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	55	135	160
					100°C	45	115	110
<b>Temperature Factor of Permeability</b>	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	-1 ~ 1	-1 ~ 1	-1 ~ 0
					20 ~ 70°C	-1 ~ 1	-1 ~ 1	-1 ~ 1
<b>Hysteresis Material Constant</b>	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5	< 0.5	< 0.5
<b>Disaccommodation Factor</b>	D <sub>F</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2	< 2	< 2
<b>Curie Temperature</b>	T <sub>c</sub>	°C				$\geq 170$	$\geq 170$	$\geq 100$
<b>Resistivity</b>	$\rho$	Ωm				1.00	1.00	0.12
<b>Density</b>	d	g/cm <sup>3</sup>				4.90	4.90	5.00

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (9)

	Symbol	Unit	Measuring Conditions			For Wide Temperature LAN Materials		
			Freq.	Flux den.	Temp.	A043	A062	N07
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$4500 \pm 25\%$	$6000 \pm 25\%$	$7000 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 10	< 10	< 5
			100kHz		25°C	< 10	< 30	< 30
					25°C	460	460	400
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	100°C	300	320	220
					25°C	460	460	400
Remanence	Br	mT	10kHz	H = 1200A/m	100°C	60	80	60
					25°C	65	100	70
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	1 ~ 2	1 ~ 3	-1 ~ 1
					20 ~ 70°C	-1 ~ 1	-1 ~ 1	-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5	< 0.5	< 0.2
Disaccommodation Factor	D <sub>F</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2	< 2	< 2
Curie Temperature	T <sub>c</sub>	°C				≥ 160	≥ 160	≥ 130
Resistivity	$\rho$	Ωm				0.20	0.20	0.15
Density	d	g/cm <sup>3</sup>				4.85	4.85	4.90

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (10)

	Symbol	Unit	Measuring Conditions			Low THD Material	
			Freq.	Flux den.	Temp.	A101	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C		$10000 \pm 30\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C		< 10
			100kHz		25°C		< 90
					25°C		400
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	100°C		220
					25°C		175
Remanence	Br	mT	10kHz	H = 1200A/m	100°C		125
					25°C		-1 ~ 1
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C		-1 ~ 1
					20 ~ 70°C		-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C		< 0.2
Disaccommodation Factor	D <sub>F</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C		< 2
Curie Temperature	T <sub>c</sub>	°C					≥ 130
Resistivity	$\rho$	Ωm					0.15
Density	d	g/cm <sup>3</sup>					4.90

Remark: Best THD performance for 10,000 $\mu_i$  materials.

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.



## ■ Material Characteristics (11)

	Symbol	Unit	Measuring Conditions			Low $\eta_B$ Materials		
			Freq.	Flux den.	Temp.	N4	N42	N43
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$2500 \pm 25\%$	$3800 \pm 25\%$	$750 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 7	< 3.5	< 60
			100kHz		25°C	< 3	< 3.5	< 15
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	450	530	490
					100°C	320	425	400
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	180	100	400
					100°C	150	125	325
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	14	9	35
					100°C	9	13	21
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	5 ~ 25°C	< 1.3	7 ~ 9	< 2.2
					25 ~ 55°C	< 1.3	-4 ~ -2	< 1.8
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.6	< 0.3	< 2.5 <sup>(100kHz)</sup>
Curie Temperature	Tc	°C				$\geq 170$	$\geq 250$	$\geq 250$
Resistivity	$\rho$	Ωm				7.50	5.00	2.00
Density	d	g/cm <sup>3</sup>				4.70	4.90	4.70

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (12)

	Symbol	Unit	Measuring Conditions			EMI Filter Material	
			Freq.	Flux den.	Temp.	N5	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C		$2000 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C		< 1.24
			100kHz		25°C		< 23
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C		370
					100°C		285
Remanence	Br	mT	10kHz	H = 1200A/m	25°C		240
					100°C		140
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C		-
					100°C		-
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	5 ~ 25°C		< 1.1
					25 ~ 55°C		< 5.8
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C		< 0.36
Curie Temperature	Tc	°C					$\geq 130$
Resistivity	$\rho$	Ωm					140
Density	d	g/cm <sup>3</sup>					4.95

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.



## ■ Material Characteristics (13)

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Materials								
			Freq.	Flux den.	Temp.	K081	K10	K12	K13	K15	K151	K20	K25	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	800 $\pm 25\%$	1000 $\pm 25\%$	1200 $\pm 25\%$	1300 $\pm 25\%$	1500 $\pm 25\%$	1500 $\pm 25\%$	2000 $\pm 25\%$	2500 $\pm 25\%$	
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	400	355	-	-	-	-	-	-	
				H = 1200A/m		-	-	355	340	330	290	300	275	
				H = 4000A/m	25°C	280	250	-	-	-	-	-	-	
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	-	-	250	190	200	150	150	170	
				H = 4000A/m		21	19	-	-	-	-	-	-	
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	-	-	12	16	11	20	11	14	
				H = 4000A/m		8	8	11	8	6	4	3	3	
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	17	11	13	15	11	10	11	15	
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	20 ~ 60°C	8	8	11	8	6	4	3	3	
Curie Temperature	Tc	°C				$\geq 190$	$\geq 160$	$\geq 160$	$\geq 150$	$\geq 130$	$\geq 110$	$\geq 100$	$\geq 90$	
Resistivity	$\rho$	Ωm				$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	
Density	d	g/cm³				5.10	5.10	5.10	5.10	5.10	5.10	5.10	5.10	

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (14)

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Materials								
			Freq.	Flux den.	Temp.	D1C	D25	D27	D28	D30	D35	D37	D40	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	350 $\pm 25\%$	500 $\pm 25\%$	700 $\pm 25\%$	800 $\pm 25\%$	1000 $\pm 25\%$	1100 $\pm 25\%$	1500 $\pm 25\%$	2000 $\pm 25\%$	
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	360	390	365	365	340	-	-	-	
				H = 1200A/m		-	-	-	-	-	305	290	275	
				H = 4000A/m	25°C	255	260	235	180	115	-	-	-	
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	-	-	-	-	-	140	150	115	
				H = 4000A/m		31	58	20	26	28	-	-	-	
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	-	-	-	-	-	22	20	8	
				H = 4000A/m		-	-	20	20	35	20	10	18	
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	< 0.25mT	25°C	-	-	20	20	35	20	10	18	
						30	248	-	-	-	-	-	-	
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25mT	20 ~ 80°C	$\leq 50$	$\leq 35$	$\leq 7$	$\leq 5$	$\leq 6$	$\leq 2$	$\leq 4$	$\leq 20$	
					-50 ~ 80°C	-	-	-	$\leq 1.5$	-	-	-	-	
Curie Temperature	Tc	°C				$\geq 160$	$\geq 180$	$\geq 150$	$\geq 150$	$\geq 140$	$\geq 120$	$\geq 110$	$\geq 90$	
Resistivity	$\rho$	Ωm				$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	
Density	d	g/cm³				5.00	5.00	4.80	5.00	5.00	5.00	5.00	5.00	

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (15)

	Symbol	Unit	Measuring Conditions			Conventional High Bs Materials			
			Freq.	Flux den.	Temp.	A30	A31	A40	A50
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$300 \pm 25\%$	$300 \pm 25\%$	$400 \pm 25\%$	$500 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	435	435	430	330
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	300	180	320	125
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	68	52	62	56
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	< 0.25mT	25°C	-	-	-	30
			0.4MHz			-	50	-	-
			1MHz			40	-	35	-
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	20 ~ 80°C	$\leq 25$	$\leq 25$	$\leq 20$	$1 \sim 5$
Curie Temperature	Tc	°C				$\geq 250$	$\geq 250$	$\geq 250$	$\geq 150$
Resistivity	$\rho$	Ωm				$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$
Density	d	g/cm³				5.00	5.00	5.00	5.00

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (16)

	Symbol	Unit	Measuring Conditions			Automotive High Bs Materials			
			Freq.	Flux den.	Temp.	B30	B40	B45	B60
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$300 \pm 25\%$	$400 \pm 25\%$	$450 \pm 25\%$	$600 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	470	430	450	430
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	250	300	270	300
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	80	45	49	40
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	60	40	40	25
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	20 ~ 60°C	16	10	15	12
Curie Temperature	Tc	°C				$\geq 300$	$\geq 240$	$\geq 240$	$\geq 210$
Resistivity	$\rho$	Ωm				$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$
Density	d	g/cm³				5.20	5.20	5.20	5.20

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.



## ■ Material Characteristics (17)

	Symbol	Unit	Measuring Conditions			Low Permeability Materials					
			Freq.	Flux den.	Temp.	L1	L2	L3	L4	L5	L6
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	150 $\pm$ 25%	75 $\pm$ 25%	20 $\pm$ 25%	50 $\pm$ 25%	120 $\pm$ 25%	14 $\pm$ 25%
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	410	420	305*	395	390	265*
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	170	275	120*	255	175	175*
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	105	140	600*	200	140	1540*
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10MHz	< 0.25mT	25°C	180**	150	445	170	350**	705
Curie Temperature	Tc	°C				$\geq 250$	$\geq 250$	$\geq 300$	$\geq 300$	$\geq 250$	$\geq 300$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$
Density	d	g/cm³				5.10	5.10	5.10	5.10	5.10	5.10

\* Measuring Conditions H=8000A/m

\*\* Measuring Conditions Freq.=100KHz

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## ■ Material Characteristics (18)

	Symbol	Unit	Measuring Conditions			For Rod Core Antenna Materials					
			Freq.	Flux den.	Temp.	H2	H3	H5	H5M	H5R	H5N
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	50 $\pm$ 25%	100 $\pm$ 25%	250 $\pm$ 25%	230 $\pm$ 25%	200 $\pm$ 25%	300 $\pm$ 25%
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	400	330	410	430	400	390
					100°C	350	275	345	365	330	310
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	195	225	295	250	290	260
					100°C	195	180	200	180	210	185
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	155	95	40	75	55	155
					100°C	120	65	30	60	35	125
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C	185	70	75	50	40	475
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$			20 ~ 80°C	100	80	40	30	25	$\leq 5$
Curie Temperature	Tc	°C				$\geq 300$	$\geq 250$	$\geq 250$	$\geq 280$	$\geq 240$	$\geq 200$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$
Density	d	g/cm³				5.10	4.80	5.10	5.10	5.10	5.00

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## Material Characteristics (19)

	Symbol	Unit	Measuring Conditions			Wide Temperature RFID Materials			
			Freq.	Flux den.	Temp.	F10	F52	F80	F100
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$100 \pm 25\%$	$410 \pm 25\%$	$800 \pm 25\%$	$1000 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	330	325	360	335
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	185	140	155	140
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	220	90	45	33
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	< 0.25mT	25°C	-	50	20	16
			1MHz			55	-	-	-
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25mT	20 ~ 60°C	-	-3 ~ -1	-1 ~ 1	-1 ~ 1
					20 ~ 80°C	$\leq 35$	-	-	-
Curie Temperature	Tc	°C				$\geq 170$	$\geq 140$	$\geq 150$	$\geq 130$
Resistivity	$\rho$	Ωm				$> 10^6$	$> 10^6$	$> 10^6$	$> 10^6$
Density	d	g/cm³				5.10	5.10	5.10	5.10

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## Material Characteristics (20)

	Symbol	Unit	Measuring Conditions			For Rod Core Antenna Materials		
			Freq.	Flux den.	Temp.	H3A	H3B	H4
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$125 \pm 25\%$	$150 \pm 25\%$	$300 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	320	330	330
					100°C	260	270	240
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	235	245	205
					100°C	175	185	130
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	80	90	55
					100°C	50	60	35
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C	110	70	35
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$			20 ~ 80°C	110	60	100
Curie Temperature	Tc	°C				$\geq 230$	$\geq 220$	$\geq 160$
Resistivity	$\rho$	Ωm				$> 10^6$	$> 10^6$	$> 10^6$
Density	d	g/cm³				4.60	4.80	4.80

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

## Material Characteristics (21)

	Symbol	Unit	Measuring Conditions			EMI-Filter Material	
			Freq.	Flux den.	Temp.	M80	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C		$800 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C		315
Remanence	Br	mT	10kHz	H = 4000A/m	25°C		215
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C		17
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C		19
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	20 ~ 60°C		10
Curie Temperature	Tc	°C					$\geq 140$
Resistivity	$\rho$	Ωm					$> 10^6$
Density	d	g/cm³					5.10







Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

	Symbol	Unit	Measuring Conditions			Conventional Low Loss Material
			Freq.	Flux den.	Temp.	P4
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$2500 \pm 25\%$
<b>Amplitude Permeability</b>	$\mu_a$		25kHz	200mT	25°C	> 4500
					100°C	> 4500
<b>Power Loss</b>	Pv	KW/m <sup>3</sup>	25kHz	200mT	25°C	105
					100°C	55
			100kHz	200mT	25°C	630
					100°C	450
			300kHz	100mT	25°C	660
					100°C	430
			500kHz	50mT	25°C	380
					100°C	330
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	480
					100°C	380
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	135
					100°C	75
<b>Coercivity</b>	Hc	A/m	10kHz	H = 1200A/m	25°C	14
					100°C	9
<b>Hysteresis Material Constant</b>	$\eta_b$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1.2
<b>Disaccommodation Factor</b>	Df	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
<b>Curie Temperature</b>	Tc	°C				$\geq 220$
<b>Resistivity</b>	$\rho$	Ωm				5.50
<b>Density</b>	d	g/cm <sup>3</sup>				4.80

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

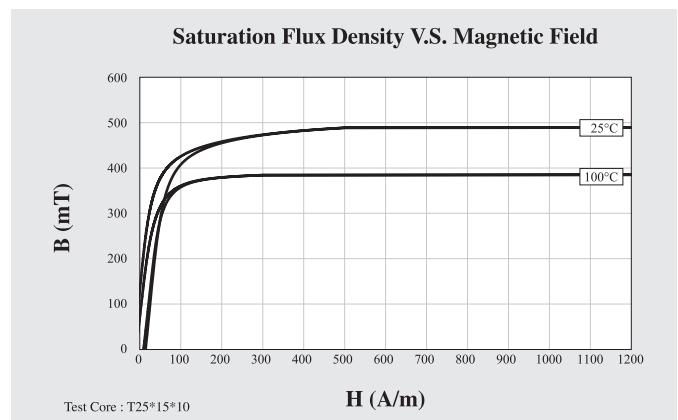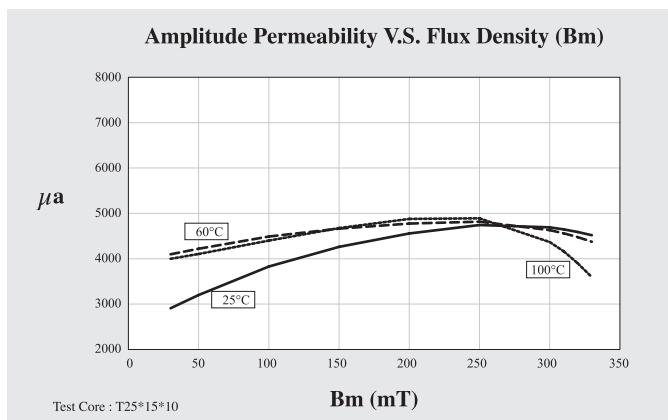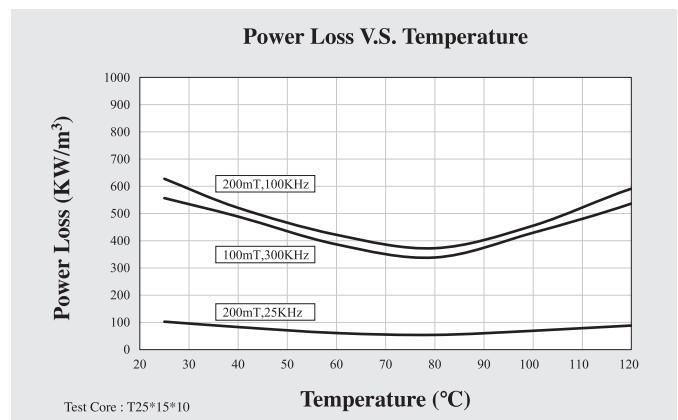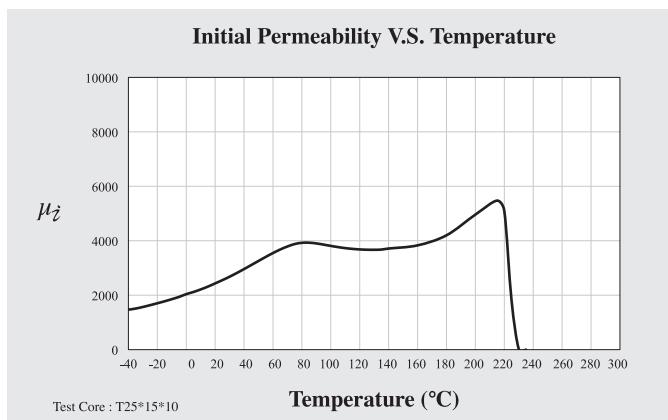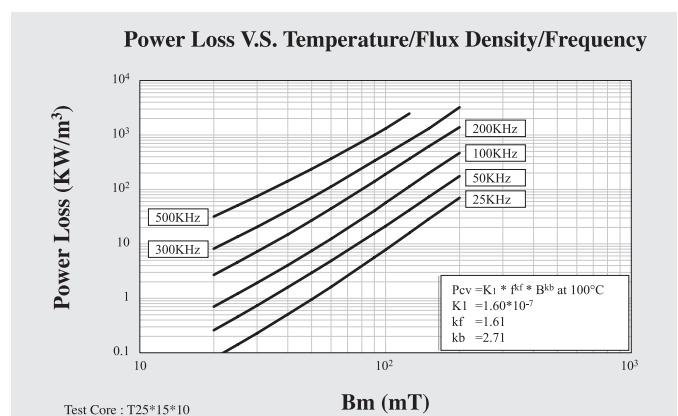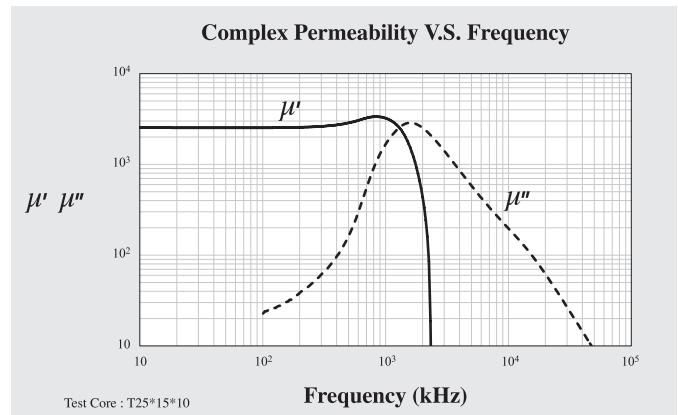

	Symbol	Unit	Measuring Conditions			Conventional Low Loss Material
			Freq.	Flux den.	Temp.	P41
Initial Permeability	$\mu_i$		≤ 10kHz	0.25mT	25°C	2400 ± 25%
Amplitude Permeability	$\mu_a$		25kHz	200mT	25°C	> 4500
					100°C	> 4500
Power Loss	Pv	KW/m³	25kHz	200mT	25°C	125
					100°C	50
			100kHz	200mT	25°C	650
					100°C	350
			300kHz	100mT	25°C	820
					100°C	500
			500kHz	50mT	25°C	400
					100°C	300
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	495
					100°C	395
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	170
					100°C	55
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	13
					100°C	6
Hysteresis Material Constant	$\eta_b$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1
Disaccommodation Factor	Df	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	Tc	°C				≥ 230
Resistivity	$\rho$	Ωm				4.00
Density	d	g/cm³				4.85

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

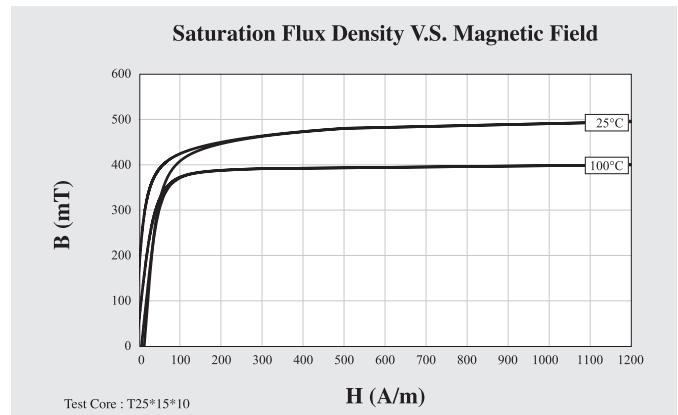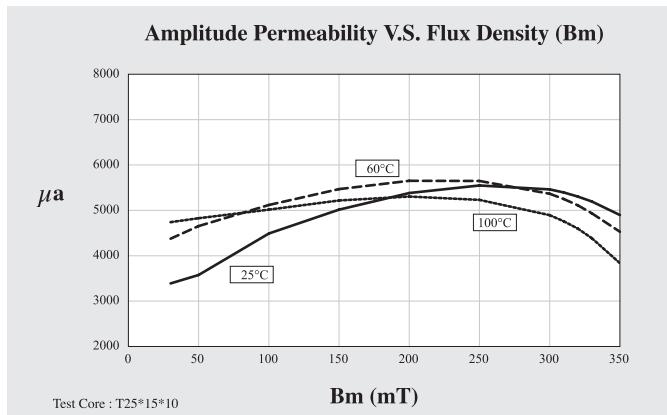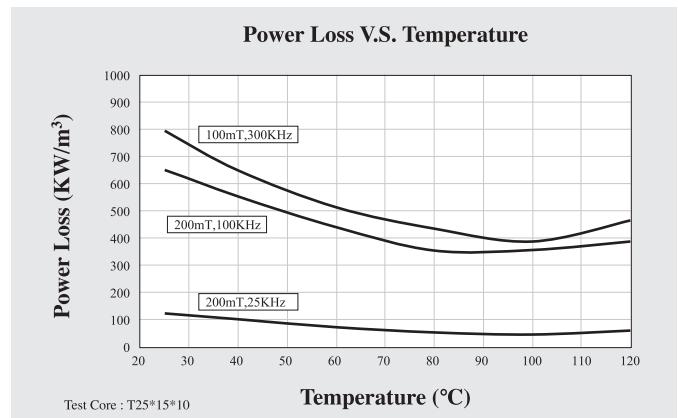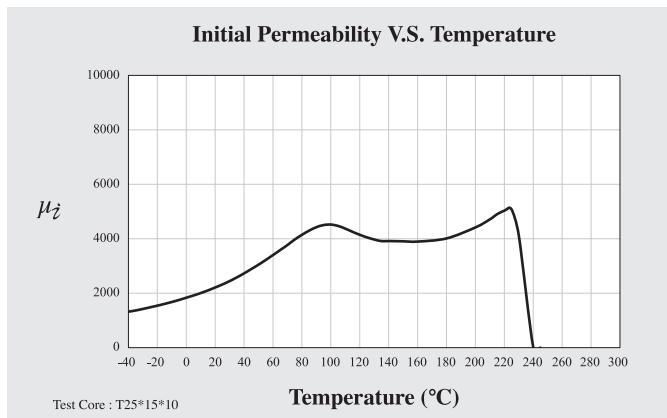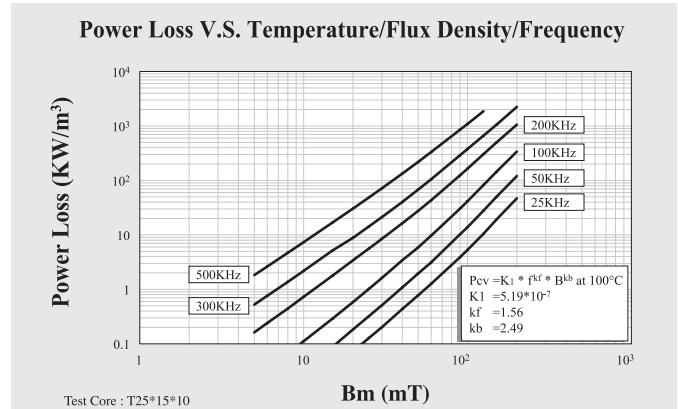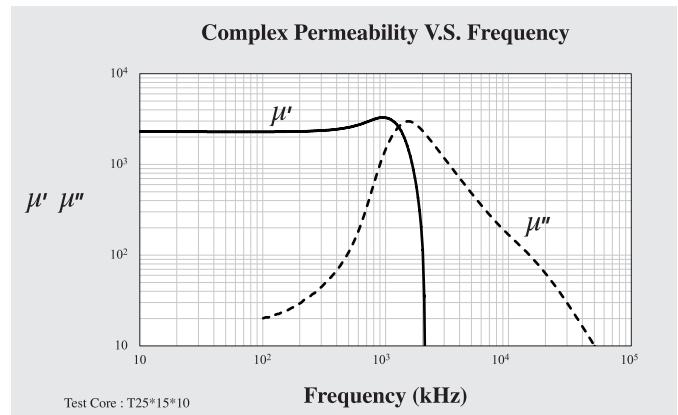

	Symbol	Unit	Measuring Conditions			Conventional Low Loss Material
			Freq.	Flux den.	Temp.	P42
Initial Permeability	$\mu_i$		≤ 10kHz	0.25mT	25°C	1800 ± 25%
Amplitude Permeability	$\mu_a$		25kHz	200mT	25°C	> 5000
					100°C	> 5000
Power Loss	Pv	KW/m³	25kHz	200mT	25°C	125
					100°C	50
			100kHz	200mT	25°C	750
					100°C	350
			300kHz	100mT	25°C	900
					100°C	500
			500kHz	50mT	25°C	450
					100°C	300
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	520
					100°C	420
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	230
					100°C	60
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	13
					100°C	8
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1
Disaccommodation Factor	Df	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	Tc	°C				≥ 240
Resistivity	$\rho$	Ωm				8.00
Density	d	g/cm³				4.90

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

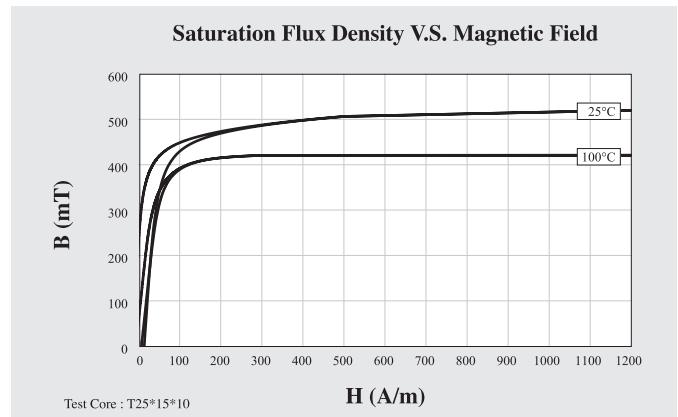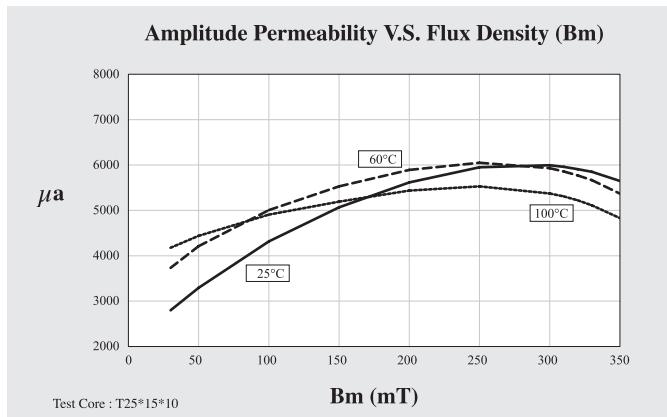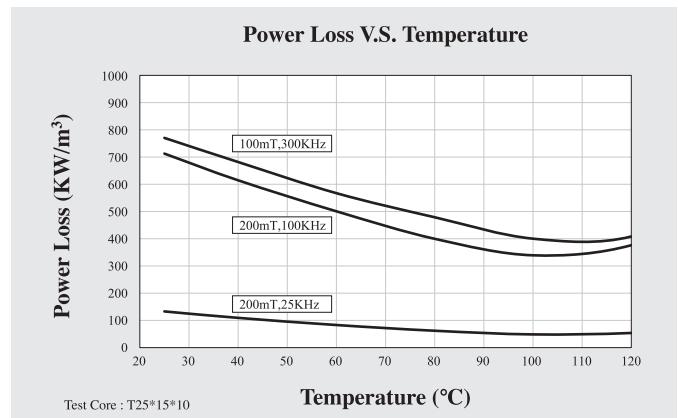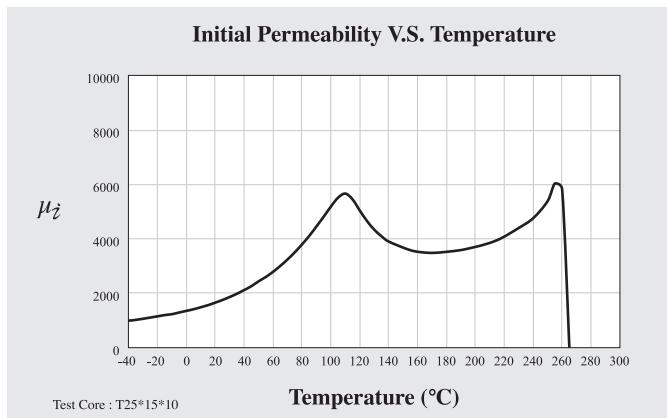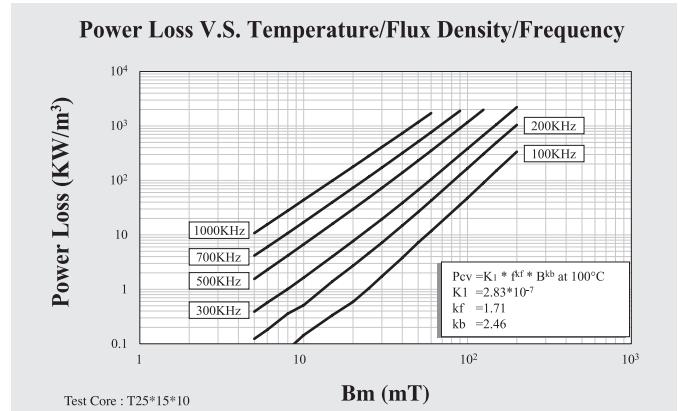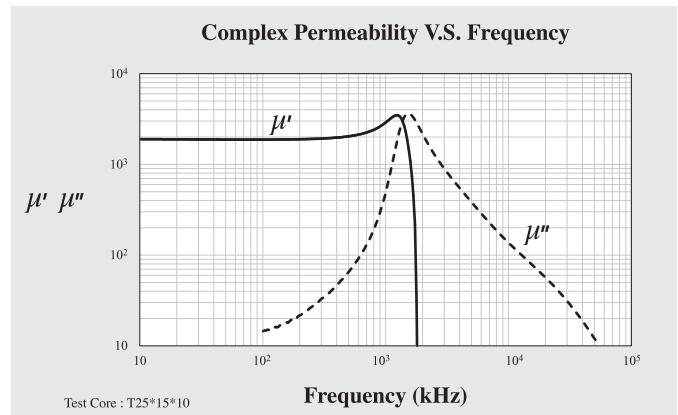

	Symbol	Unit	Measuring Conditions			Conventional Low Loss Material
			Freq.	Flux den.	Temp.	P48
<b>Initial Permeability</b>	$\mu_i$		≤ 10kHz	0.25mT	25°C	2500 ± 25%
<b>Amplitude Permeability</b>	$\mu_a$		25kHz	200mT	25°C	> 5000
					100°C	> 5000
<b>Power Loss</b>	Pv	KW/m <sup>3</sup>	100kHz	200mT	25°C	550
					100°C	250
			300kHz	100mT	25°C	570
					100°C	330
			500kHz	50mT	25°C	250
					100°C	200
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	515
					100°C	410
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	150
					100°C	55
<b>Coercivity</b>	Hc	A/m	10kHz	H = 1200A/m	25°C	13
					100°C	6
<b>Hysteresis Material Constant</b>	$\eta_B$	10 <sup>-6</sup> /mT	10kHz	1.5-3.0mT	25°C	< 1
<b>Disaccommodation Factor</b>	D <sub>f</sub>	10 <sup>-6</sup>	10kHz	< 0.25 mT	25°C	< 2
<b>Curie Temperature</b>	T <sub>c</sub>	°C				≥ 220
<b>Resistivity</b>	$\rho$	Ωm				5.00
<b>Density</b>	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

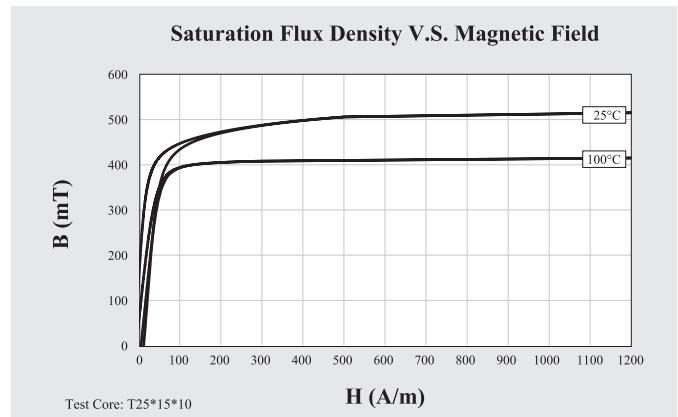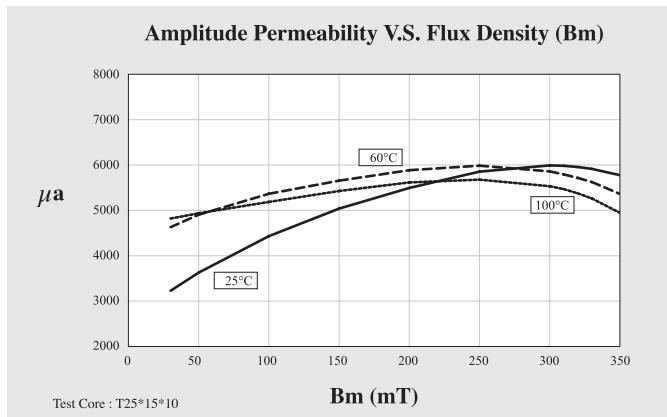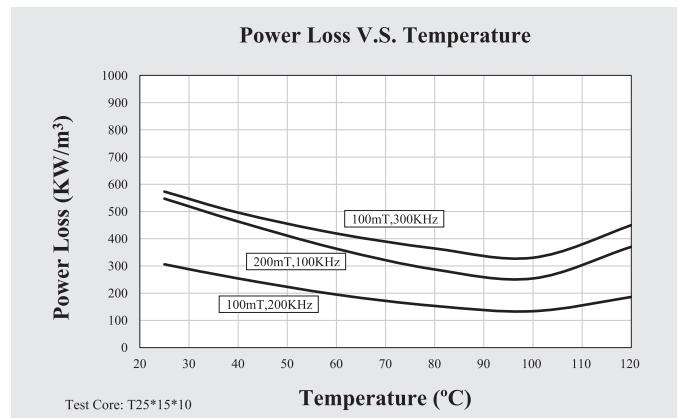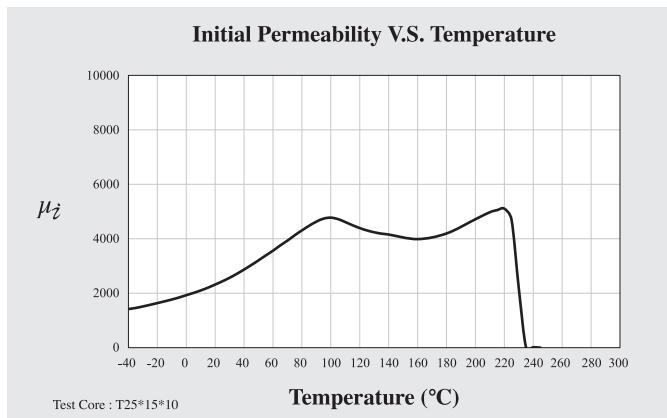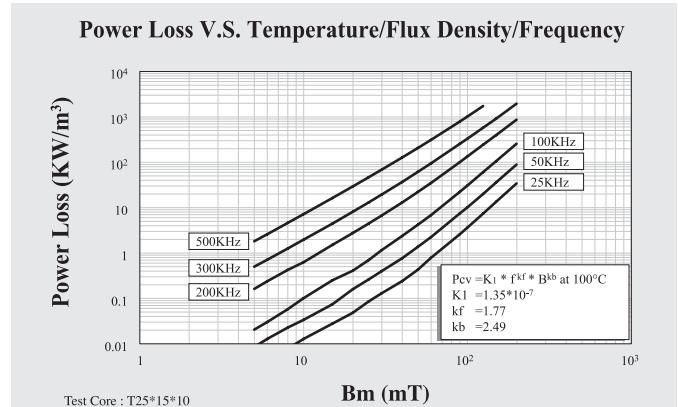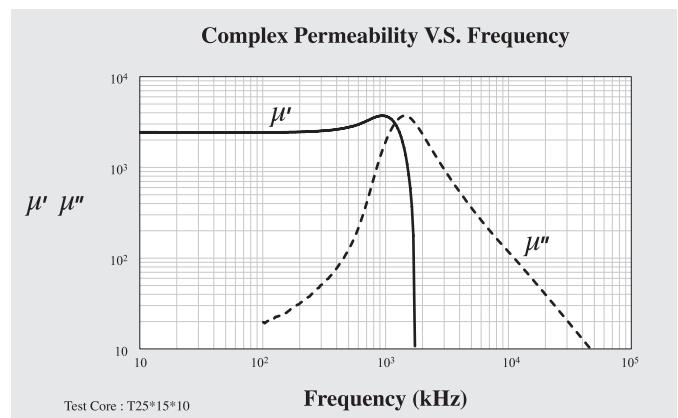

	Symbol	Unit	Measuring Conditions			Wide Temperature Low Loss Material
			Freq.	Flux den.	Temp.	
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$3100 \pm 25\%$
<b>Amplitude Permeability</b>	$\mu_a$		25kHz	200mT	25°C	> 5000
					100°C	> 5000
<b>Power Loss</b>	Pv	KW/m <sup>3</sup>	100kHz	200mT	25°C	360
					100°C	260
			300kHz	100mT	25°C	400
					100°C	350
			500kHz	50mT	25°C	200
					100°C	200
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	530
					100°C	405
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	80
					100°C	50
<b>Coercivity</b>	Hc	A/m	10kHz	H = 1200A/m	25°C	8
					100°C	5
<b>Hysteresis Material Constant</b>	$\eta_b$	10 <sup>-6</sup> /mT	10kHz	1.5-3.0mT	25°C	< 0.6
<b>Disaccommodation Factor</b>	D <sub>f</sub>	10 <sup>-6</sup>	10kHz	< 0.25 mT	25°C	< 1
<b>Curie Temperature</b>	T <sub>c</sub>	°C				≥ 215
<b>Resistivity</b>	$\rho$	Ωm				5.00
<b>Density</b>	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

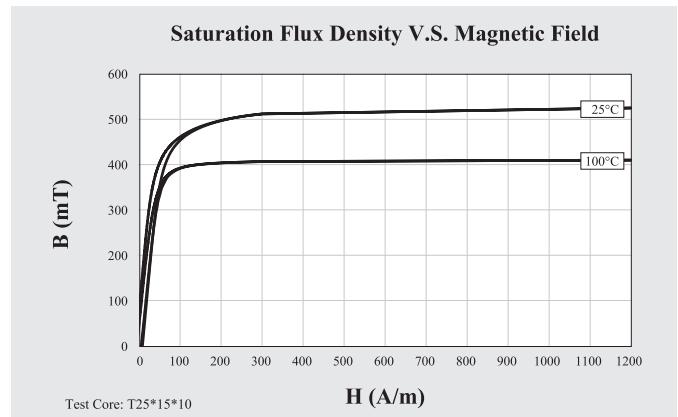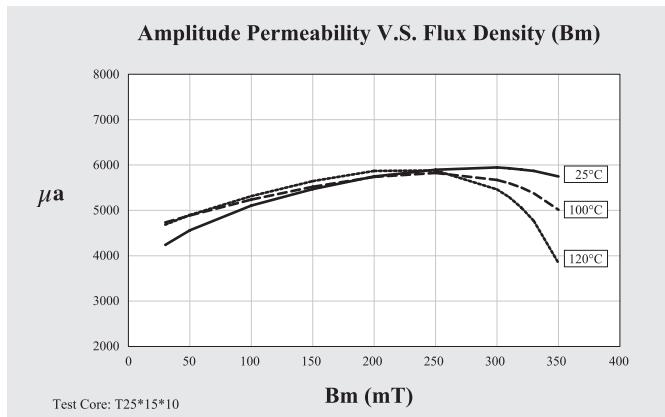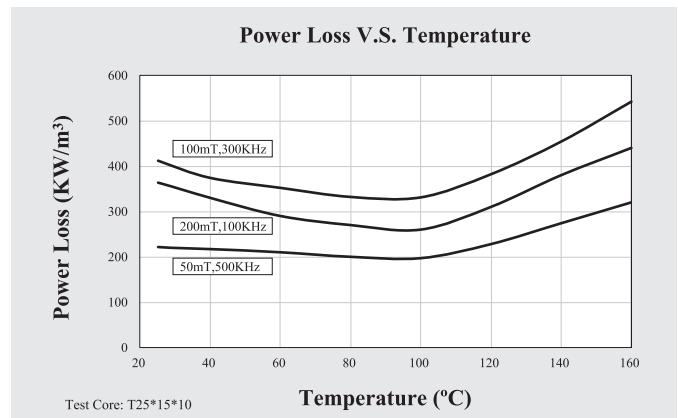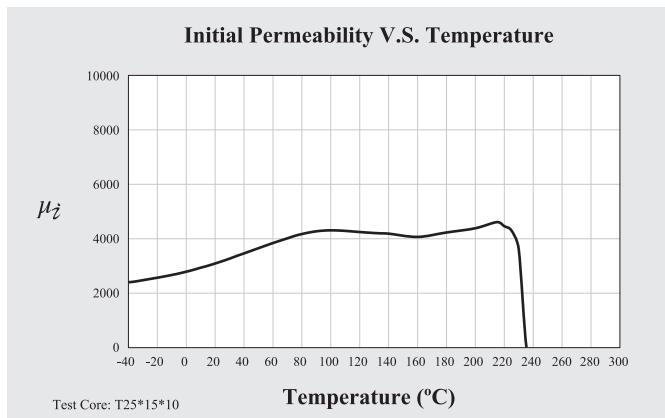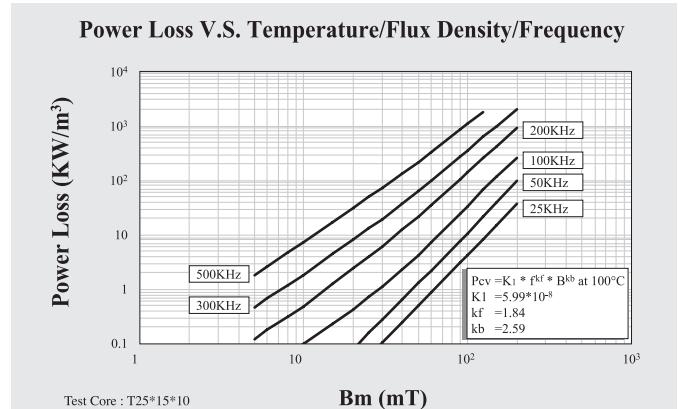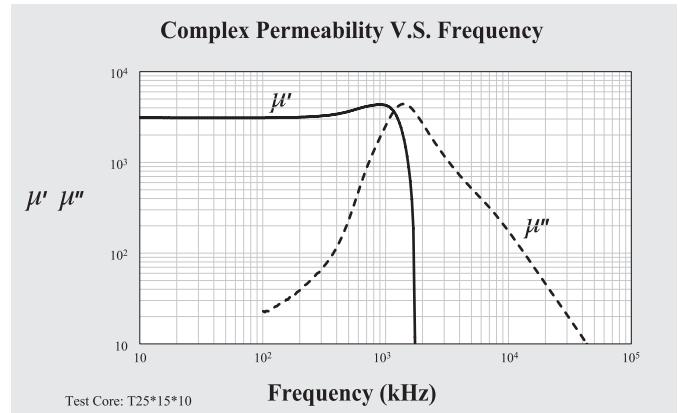

	Symbol	Unit	Measuring Conditions			Wide Temperature Low Loss Material
			Freq.	Flux den.	Temp.	
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$3800 \pm 25\%$
<b>Amplitude Permeability</b>	$\mu_a$		25kHz	200mT	25°C	> 5000
					100°C	> 5000
<b>Power Loss</b>	Pv	KW/m <sup>3</sup>	100kHz	200mT	25°C	270
					100°C	310
			300kHz	100mT	25°C	295
					100°C	385
			500kHz	50mT	25°C	165
					100°C	230
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	540
					100°C	420
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	70
					100°C	40
<b>Coercivity</b>	Hc	A/m	10kHz	H = 1200A/m	25°C	8
					100°C	6
<b>Hysteresis Material Constant</b>	$\eta_b$	10 <sup>-6</sup> /mT	10kHz	1.5-3.0mT	25°C	< 0.6
<b>Disaccommodation Factor</b>	Df	10 <sup>-6</sup>	10kHz	< 0.25 mT	25°C	< 1
<b>Curie Temperature</b>	Tc	°C				≥ 215
<b>Resistivity</b>	$\rho$	Ωm				5.00
<b>Density</b>	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

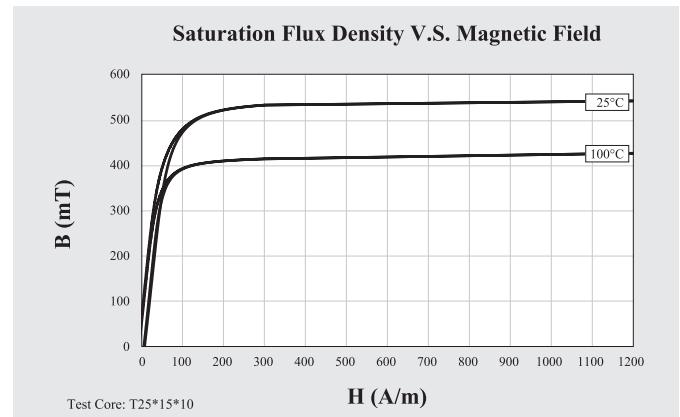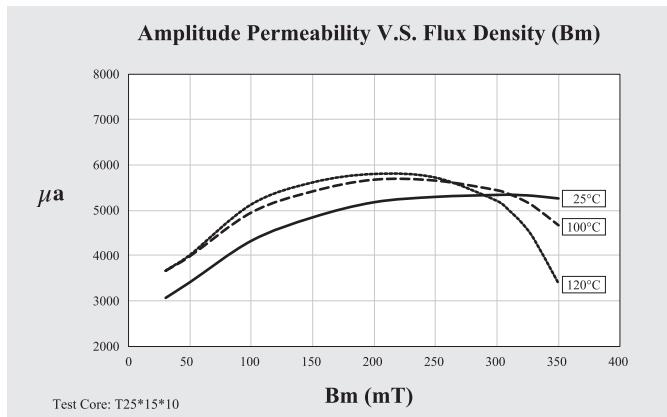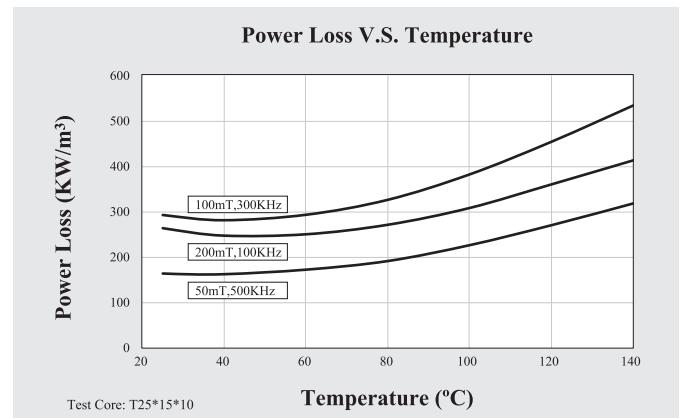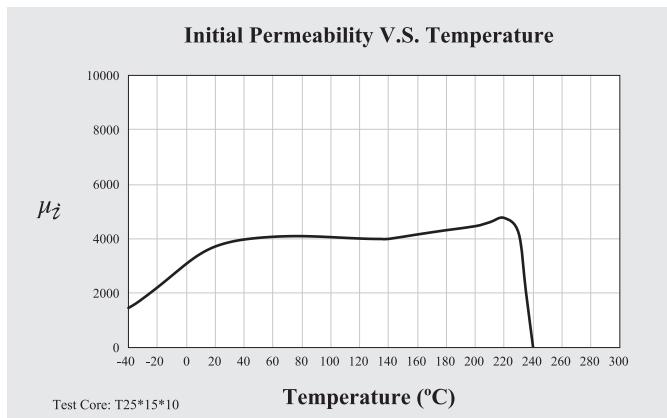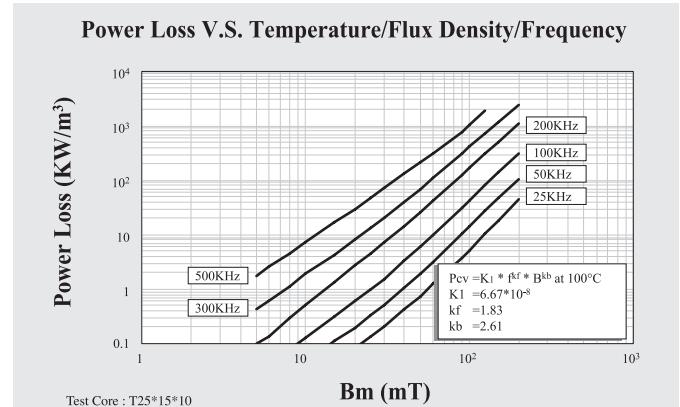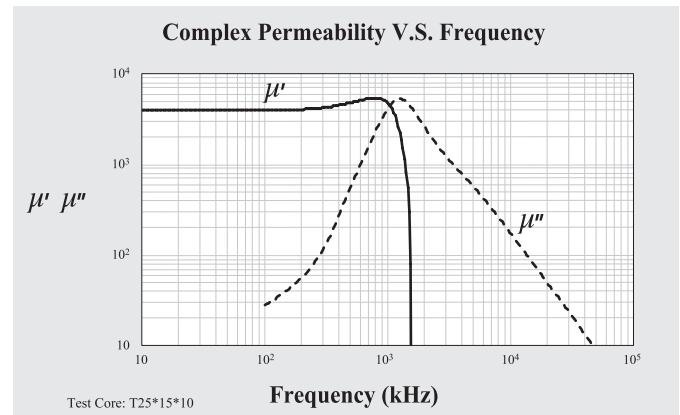

	Symbol	Unit	Measuring Conditions			Wide Temperature Low Loss Material
			Freq.	Flux den.	Temp.	
<b>Initial Permeability</b>	$\mu_i$		≤ 10kHz	0.25mT	25°C	3000 ± 25%
<b>Amplitude Permeability</b>	$\mu_a$		25kHz	200mT	25°C	> 3900
					100°C	> 4450
<b>Power Loss</b>	Pv	KW/m³	100kHz	200mT	25°C	310
					100°C	380
			300kHz	100mT	25°C	300
					100°C	260
			500kHz	50mT	25°C	100
					100°C	120
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	520
					100°C	415
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	100
					100°C	80
<b>Coercivity</b>	Hc	A/m	10kHz	H = 1200A/m	25°C	13
					100°C	11
<b>Hysteresis Material Constant</b>	$\eta_b$	10⁻⁶/mT	10kHz	1.5-3.0mT	25°C	< 0.6
<b>Disaccommodation Factor</b>	Df	10⁻⁶	10kHz	< 0.25 mT	25°C	< 1
<b>Curie Temperature</b>	Tc	°C				≥ 215
<b>Resistivity</b>	$\rho$	Ωm				5.00
<b>Density</b>	d	g/cm³				4.85

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

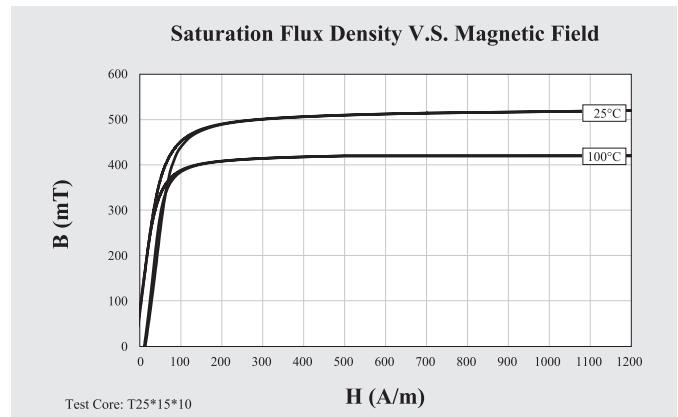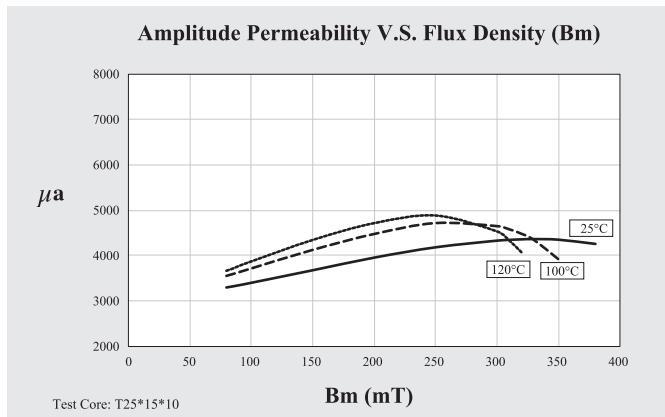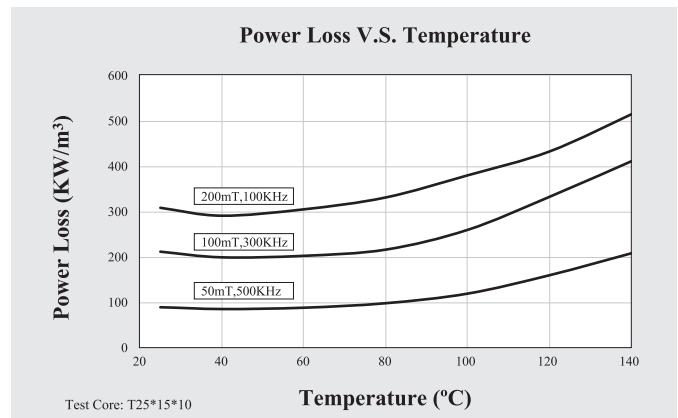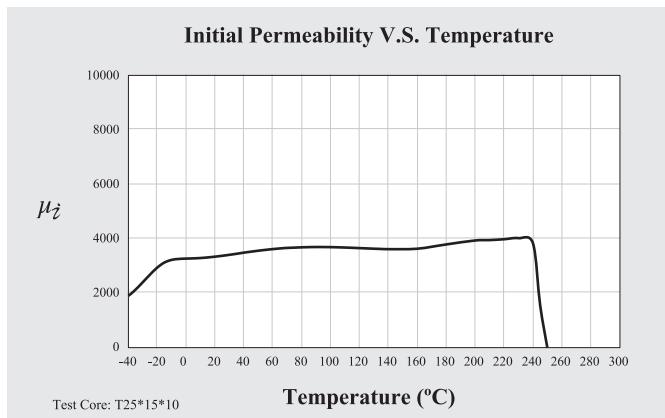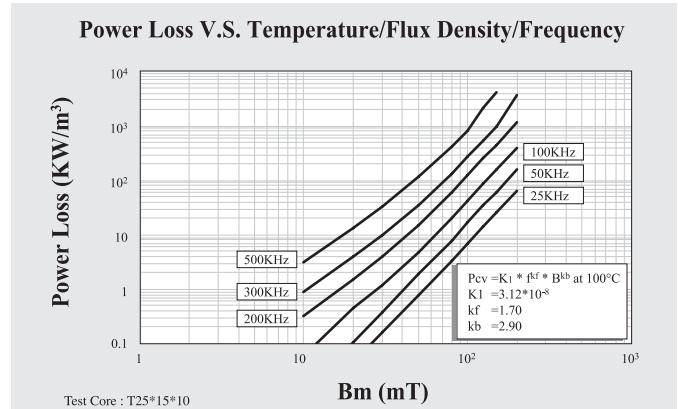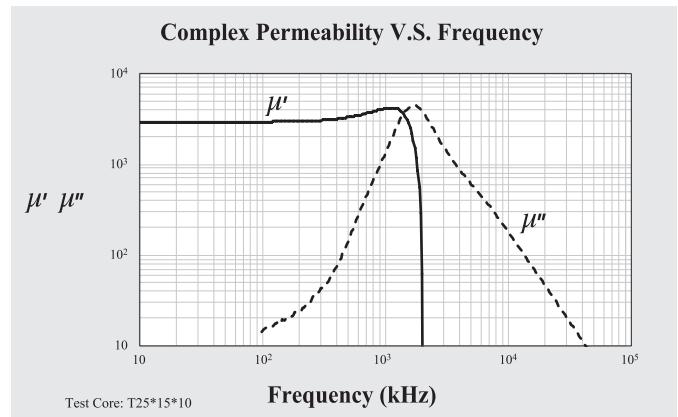

	Symbol	Unit	Measuring Conditions			Wide Temperature Low Loss Material
			Freq.	Flux den.	Temp.	
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$3000 \pm 25\%$
<b>Amplitude Permeability</b>	$\mu_a$		25kHz	200mT	25°C	> 4500
					100°C	> 4500
<b>Power Loss</b>	Pv	KW/m <sup>3</sup>	100kHz	200mT	25°C	340
					100°C	350
			300kHz	100mT	25°C	350
					100°C	350
			500kHz	50mT	25°C	230
					100°C	230
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	520
					100°C	420
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	100
					100°C	70
<b>Coercivity</b>	Hc	A/m	10kHz	H = 1200A/m	25°C	11
					100°C	8
<b>Hysteresis Material Constant</b>	$\eta_b$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.6
<b>Disaccommodation Factor</b>	Df	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 1
<b>Curie Temperature</b>	Tc	°C				$\geq 220$
<b>Resistivity</b>	$\rho$	Ωm				5.00
<b>Density</b>	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

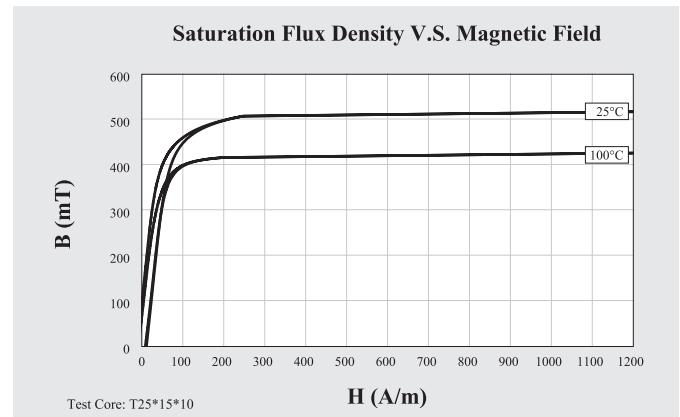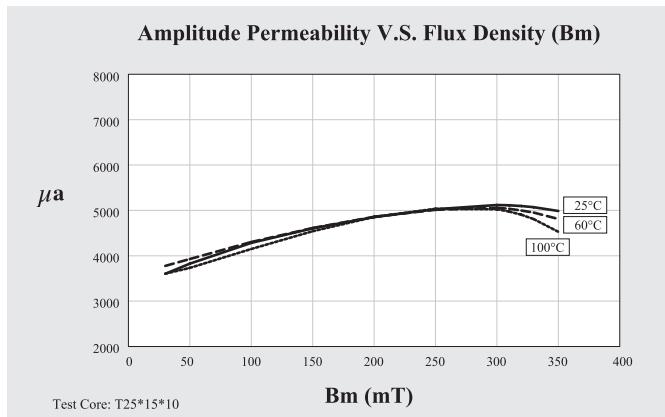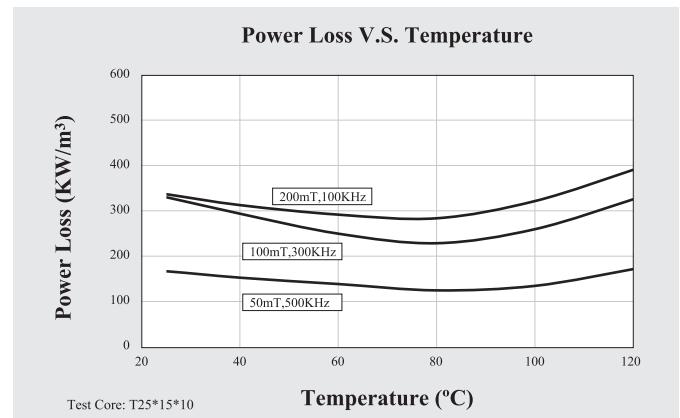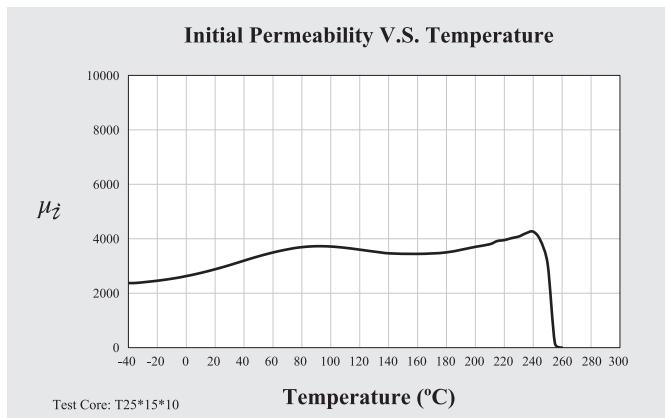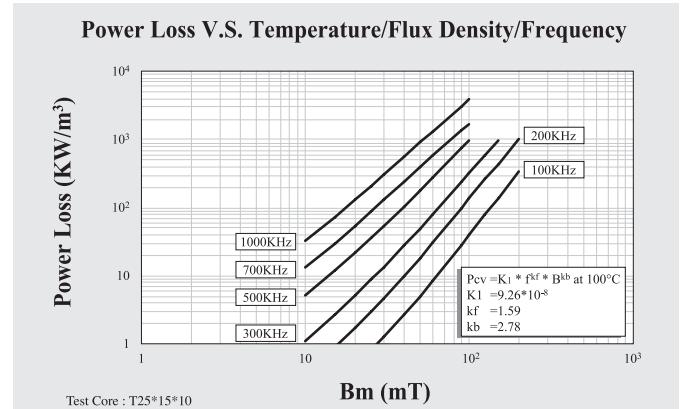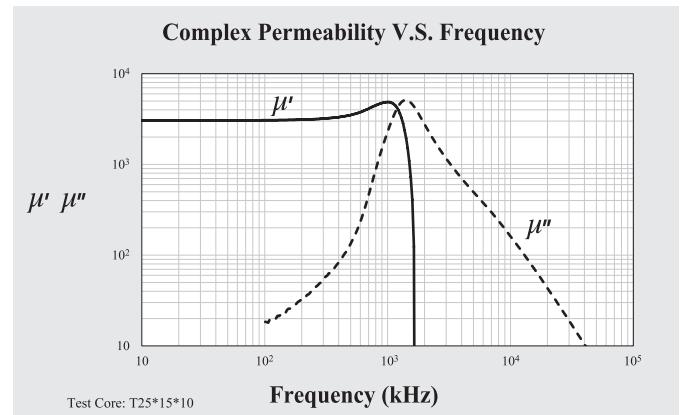

	Symbol	Unit	Measuring Conditions			High Bs Material
			Freq.	Flux den.	Temp.	P49
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1700 \pm 25\%$
Power Loss	Pv	KW/m <sup>3</sup>	100kHz	200mT	25°C	800
					100°C	400
			500kHz	50mT	25°C	450
					100°C	220
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	540
					100°C	460
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	280
					100°C	50
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	15
					100°C	7
Curie Temperature	Tc	°C				$\geq 280$
Resistivity	$\rho$	Ωm				3.00
Density	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

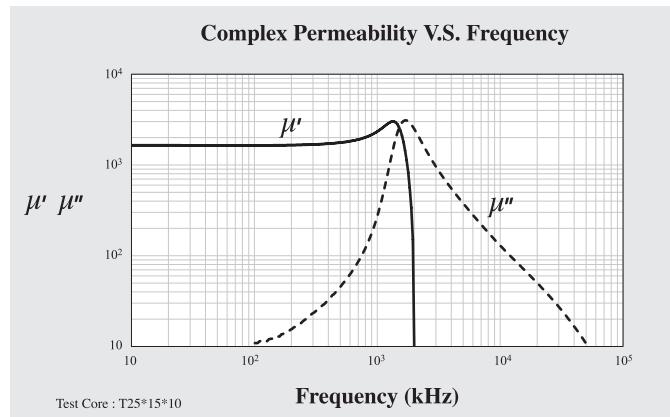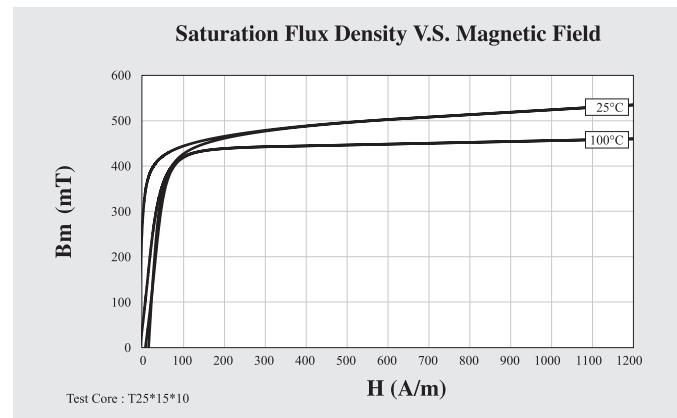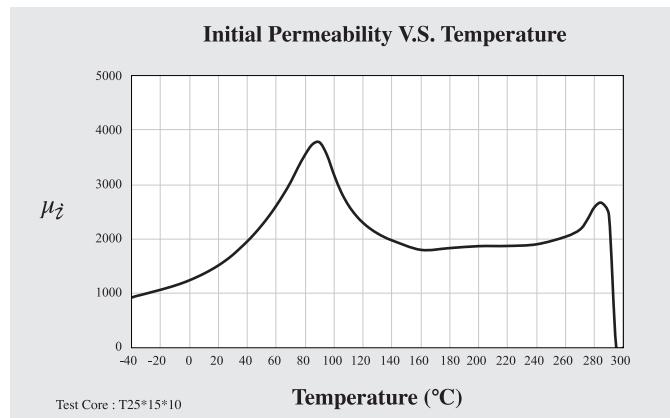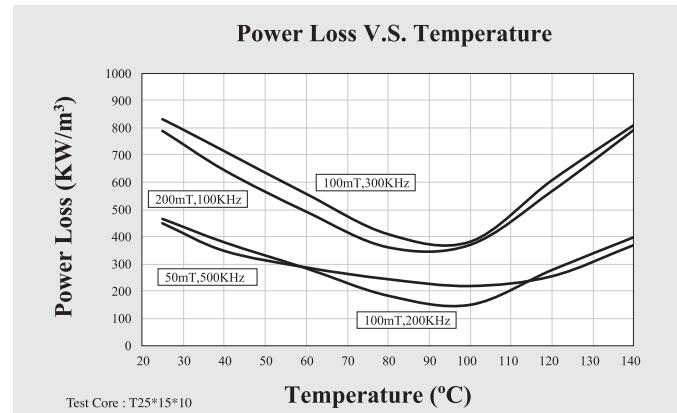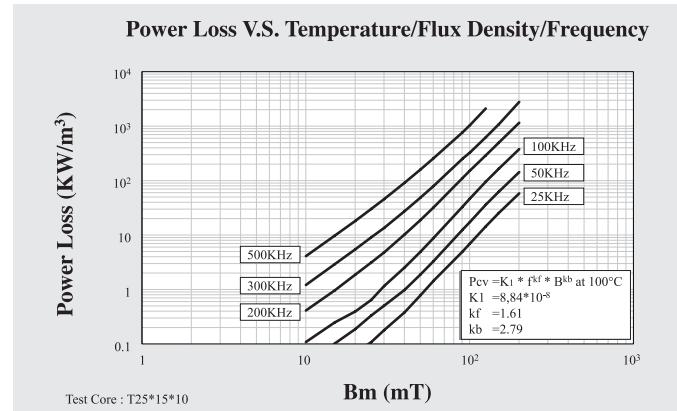

	Symbol	Unit	Measuring Conditions			High Bs Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1500 \pm 25\%$
Power Loss	Pv	KW/m <sup>3</sup>	25kHz	200mT	25°C	160
					100°C	240
			100kHz	200mT	25°C	900
					100°C	1390
			500kHz	50mT	25°C	250
					100°C	560
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	600
					100°C	500
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	140
					100°C	235
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	21
					100°C	20
Curie Temperature	Tc	°C				$\geq 300$
Resistivity	$\rho$	Ωm				5.00
Density	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

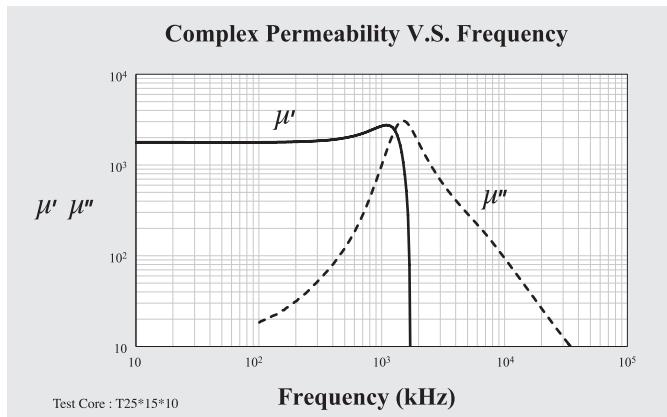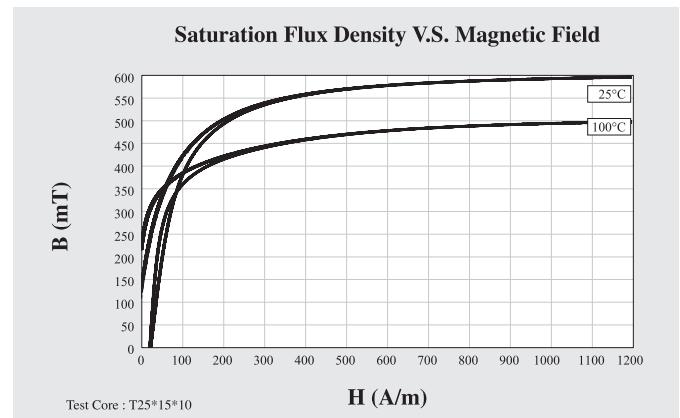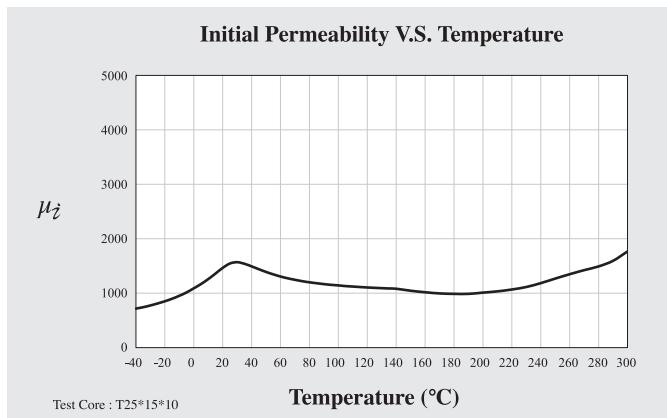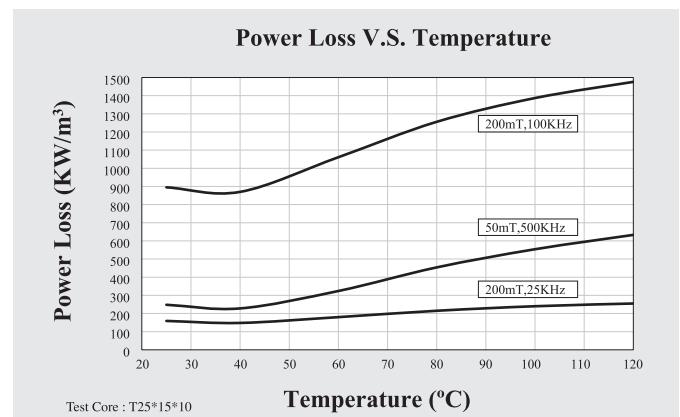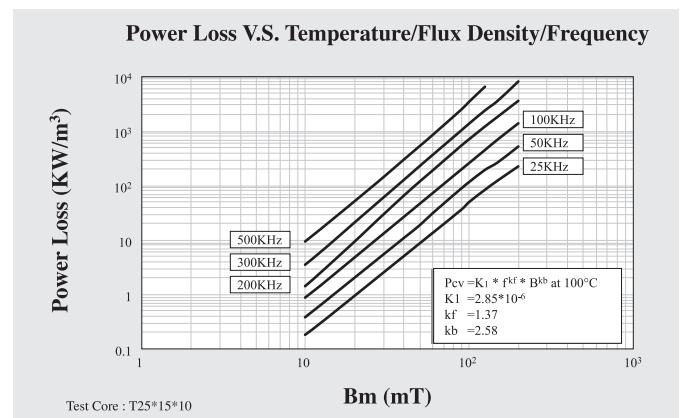

	Symbol	Unit	Measuring Conditions			High Bs Material
			Freq.	Flux den.	Temp.	P492
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$2500 \pm 25\%$
Power Loss	Pv	KW/m <sup>3</sup>	100kHz	200mT	25°C	490
					100°C	425
			300kHz	100mT	25°C	465
					100°C	365
			500kHz	50mT	25°C	215
					100°C	175
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	530
					100°C	425
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	100
					100°C	70
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	12
					100°C	9
Curie Temperature	Tc	°C				$\geq 245$
Resistivity	$\rho$	Ωm				5.00
Density	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

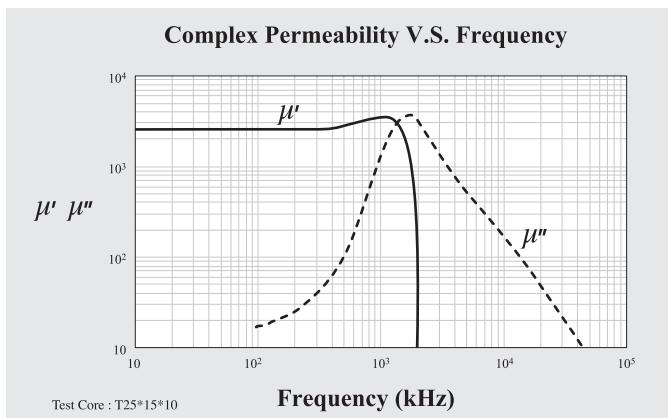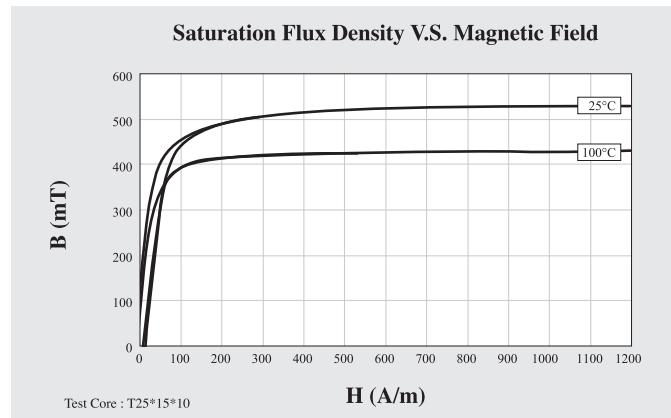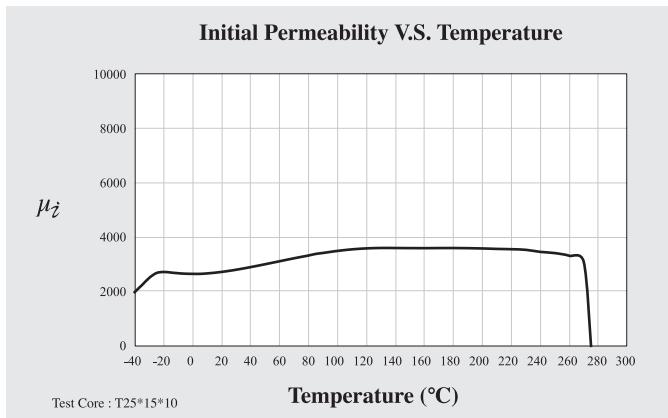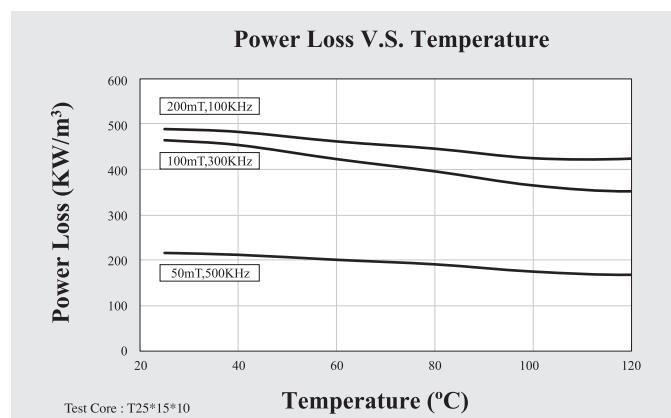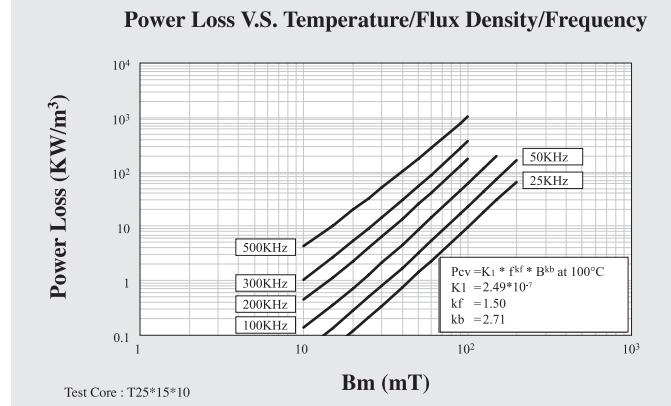

	Symbol	Unit	Measuring Conditions			High Frequency Low Loss Material
			Freq.	Flux den.	Temp.	
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$2000 \pm 25\%$
<b>Amplitude Permeability</b>	$\mu_a$		25kHz	200mT	25°C	> 4000
					100°C	> 4000
<b>Power Loss</b>	Pv	KW/m <sup>3</sup>	300kHz	100mT	25°C	600
					100°C	350
			500kHz	50mT	25°C	220
					100°C	250
			700kHz	50mT	25°C	600
					100°C	550
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	470
					100°C	350
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	135
					100°C	70
<b>Coercivity</b>	Hc	A/m	10kHz	H = 1200A/m	25°C	17
					100°C	10
<b>Hysteresis Material Constant</b>	$\eta_b$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1
<b>Disaccommodation Factor</b>	Df	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
<b>Curie Temperature</b>	Tc	°C				$\geq 220$
<b>Resistivity</b>	$\rho$	Ωm				6.40
<b>Density</b>	d	g/cm <sup>3</sup>				4.70

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

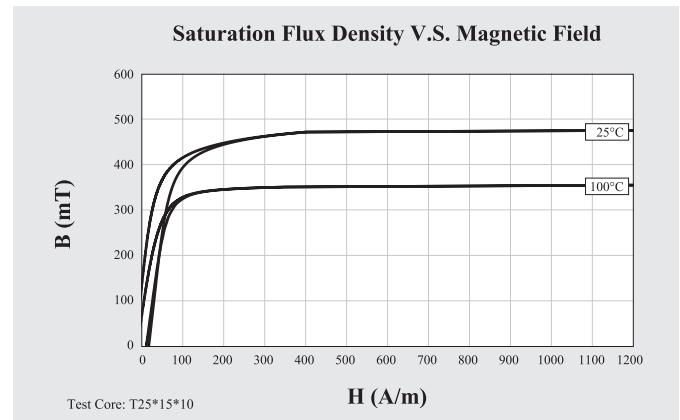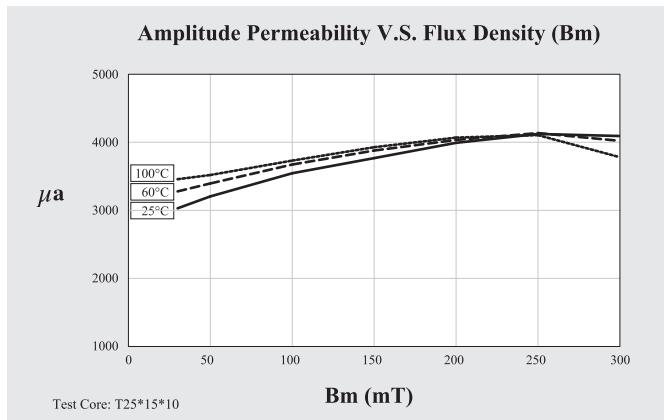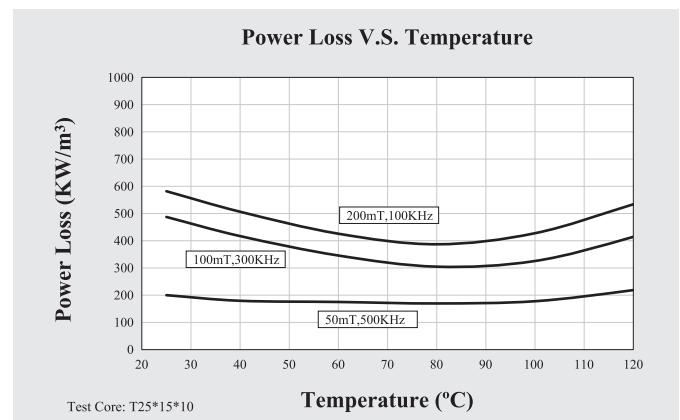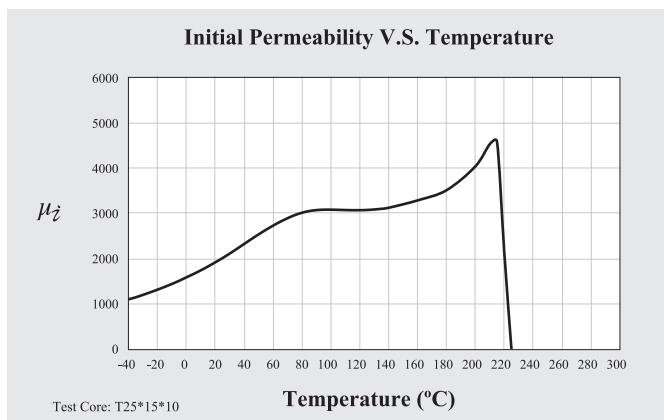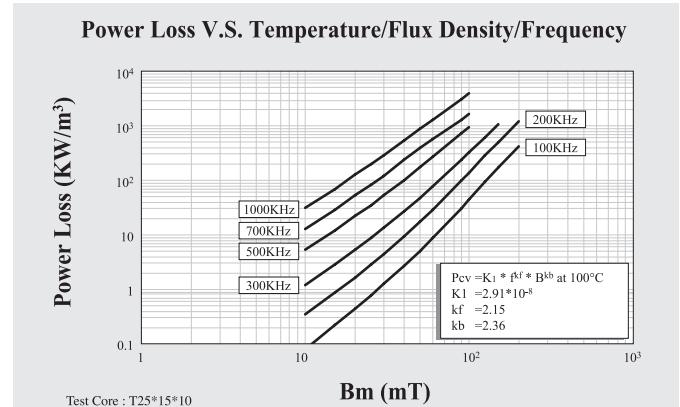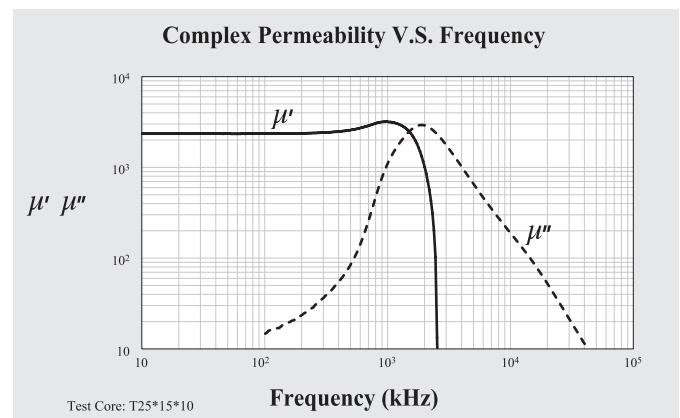

	Symbol	Unit	Measuring Conditions			High Frequency Low Loss Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1500 \pm 25\%$
Amplitude Permeability	$\mu_a$		25kHz	200mT	25°C	> 2500
					100°C	> 2500
Power Loss	Pv	KW/m <sup>3</sup>	300kHz	100mT	25°C	410
					100°C	370
			500kHz	50mT	25°C	200
					100°C	100
			700kHz	50mT	25°C	300
					100°C	250
			1000kHz	50mT	25°C	600
					100°C	600
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	490
					100°C	400
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	215
					100°C	125
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	35
					100°C	27
Hysteresis Material Constant	$\eta_b$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1
Disaccommodation Factor	Df	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	Tc	°C				$\geq 250$
Resistivity	$\rho$	Ωm				12.00
Density	d	g/cm <sup>3</sup>				4.85

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

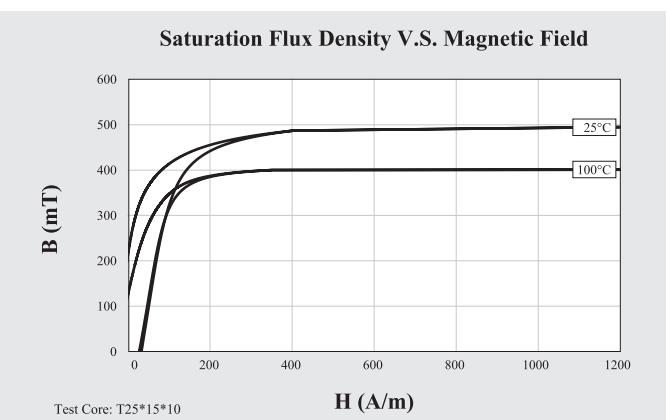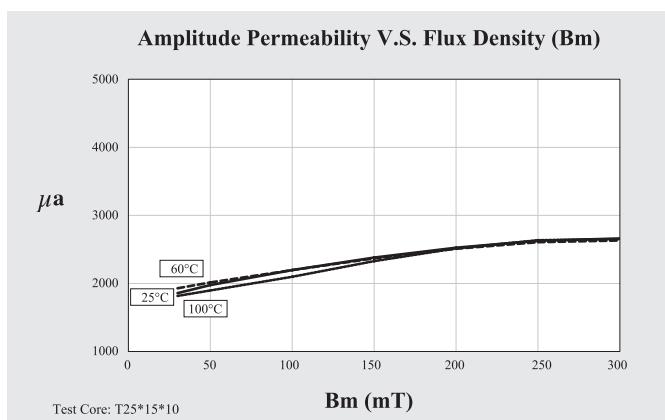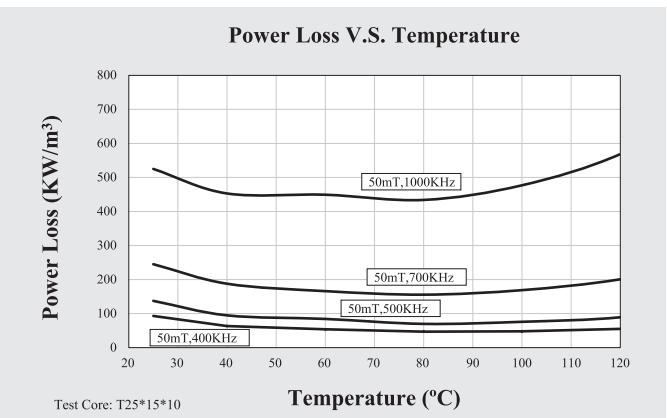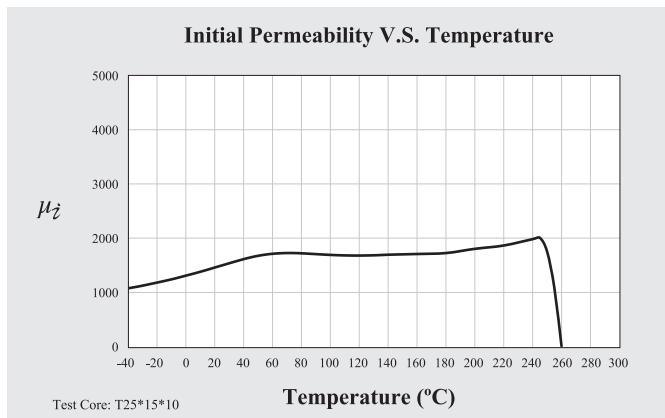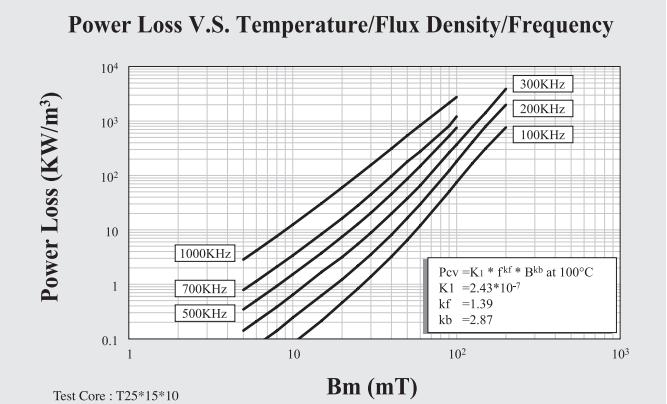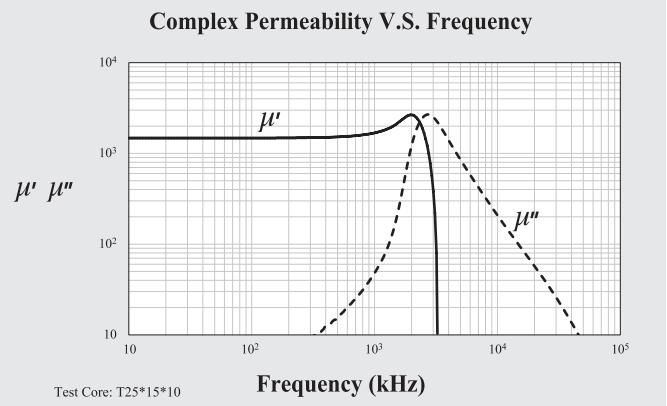

	Symbol	Unit	Measuring Conditions			High Frequency Low Loss Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		≤ 10kHz	0.25mT	25°C	2000 ± 25%
Amplitude Permeability	$\mu_a$		25kHz	200mT	25°C	> 4000
					100°C	> 4000
Power Loss	Pv	KW/m³	300kHz	100mT	25°C	510
					100°C	450
			500kHz	50mT	25°C	150
					100°C	140
			700kHz	50mT	25°C	300
					100°C	350
			1000kHz	50mT	25°C	750
					100°C	1000
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	500
					100°C	400
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	140
					100°C	110
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	21
					100°C	18
Hysteresis Material Constant	$\eta_b$	10⁻⁶/mT	10kHz	1.5-3.0mT	25°C	< 1
Disaccommodation Factor	Df	10⁻⁶	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	Tc	°C				≥ 250
Resistivity	$\rho$	Ωm				6.50
Density	d	g/cm³				4.85

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

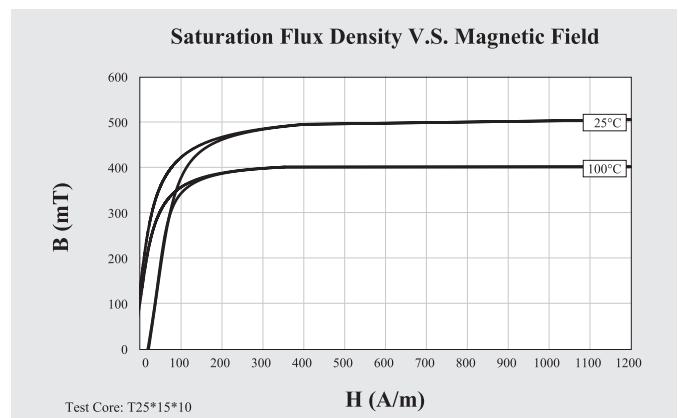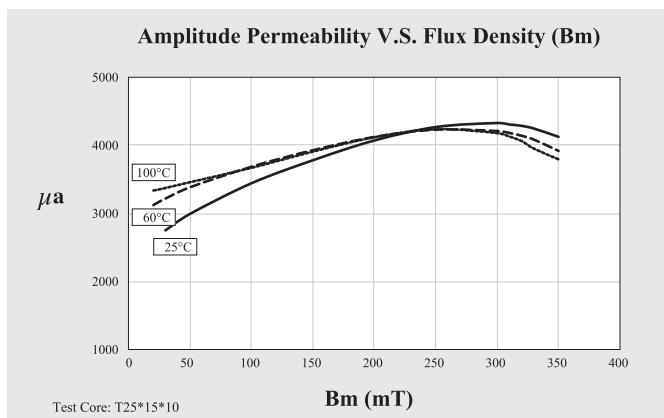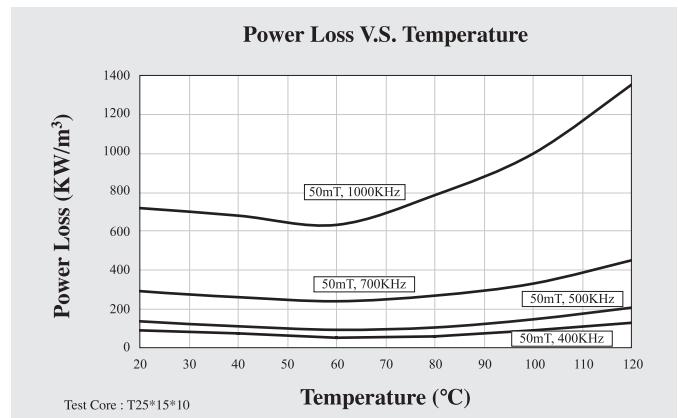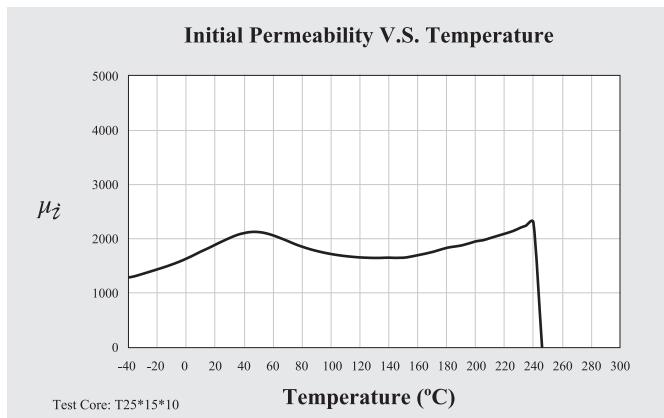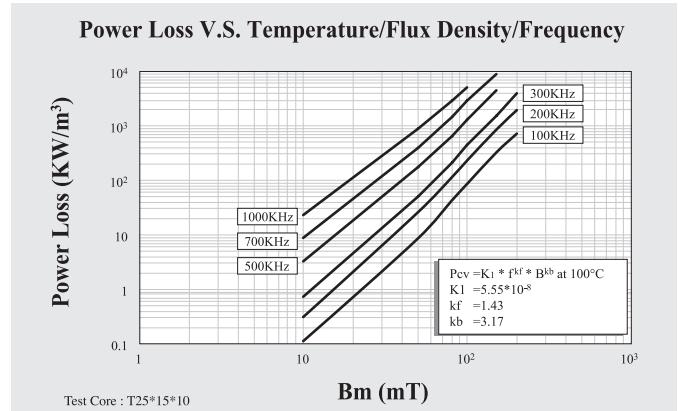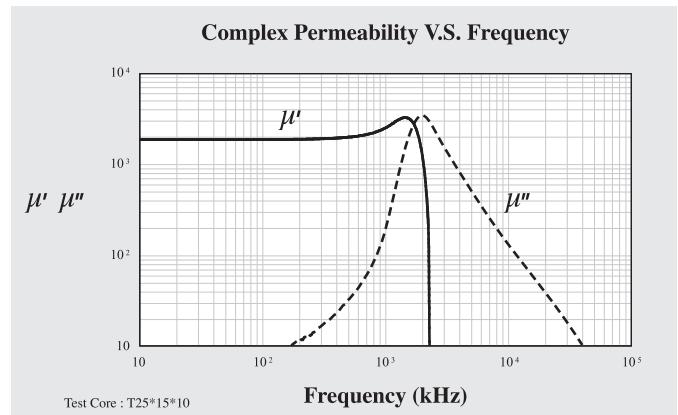

	Symbol	Unit	Measuring Conditions		High Frequency Low Loss Material	
			Freq.	Flux den.	Temp.	P53
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1200 \pm 25\%$
Amplitude Permeability	$\mu_a$		25kHz	200mT	25°C	> 1900
					100°C	> 2000
Power Loss	Pv	KW/m <sup>3</sup>	300kHz	100mT	25°C	350
					100°C	310
			500kHz	50mT	25°C	80
					100°C	60
			500kHz	100mT	25°C	650
					100°C	650
			1000kHz	50mT	25°C	300
					100°C	300
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	515
					100°C	420
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	180
					100°C	120
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	38
					100°C	33
Hysteresis Material Constant	$\eta_b$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1
Disaccommodation Factor	Df	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	Tc	°C				$\geq 280$
Resistivity	$\rho$	Ωm				10.00
Density	d	g/cm <sup>3</sup>				4.80

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

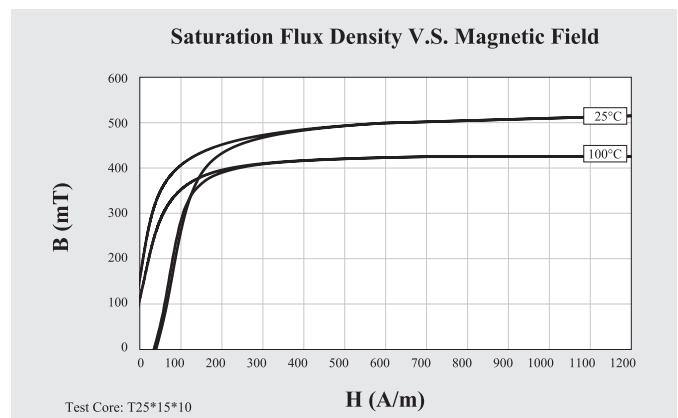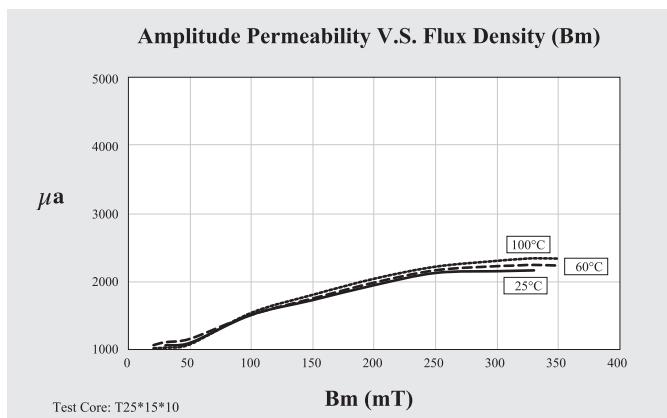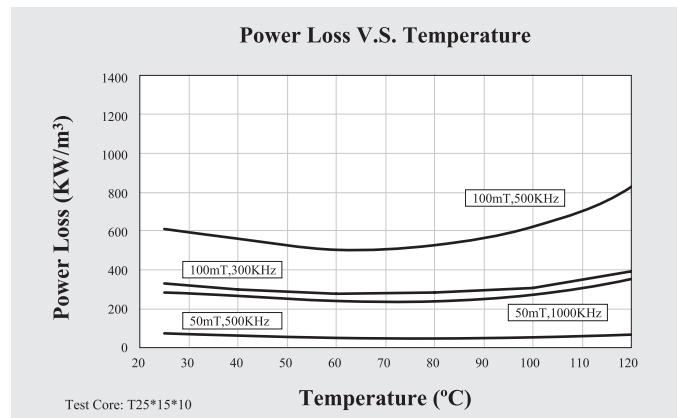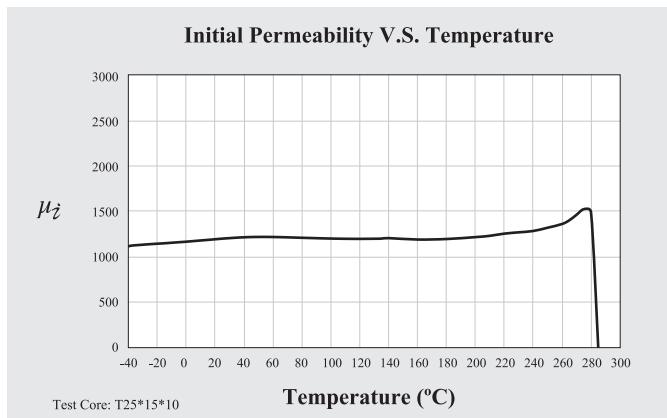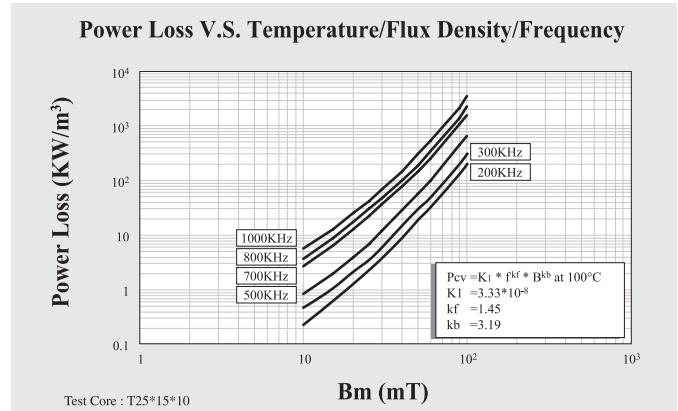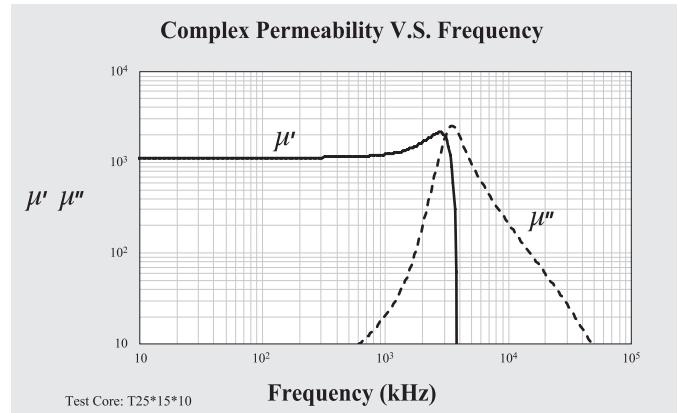

	Symbol	Unit	Measuring Conditions			High Frequency Low Loss Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$900 \pm 25\%$
Amplitude Permeability	$\mu_a$		25kHz	200mT	25°C	> 1700
					100°C	> 1800
Power Loss	Pv	KW/m <sup>3</sup>	1MHz	50mT	25°C	250
					100°C	110
			3MHz	10mT	25°C	50
					100°C	50
			3MHz	30mT	25°C	450
					100°C	370
			5MHz	9mT	25°C	150
					100°C	170
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	515
					100°C	430
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	200
					100°C	135
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	50
					100°C	40
Hysteresis Material Constant	$\eta_b$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1
Disaccommodation Factor	D <sub>f</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	T <sub>c</sub>	°C				$\geq 280$
Resistivity	$\rho$	Ωm				10.00
Density	d	g/cm <sup>3</sup>				4.80

Note: Material characteristics are typical for a toroid core.







Product specification will differ from these data due to the influence of geometry and size.

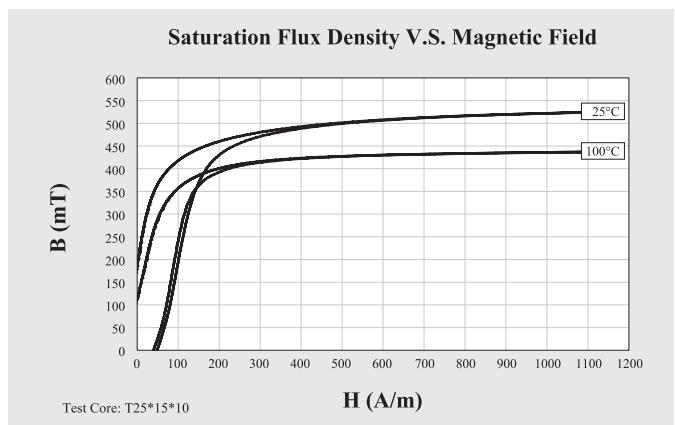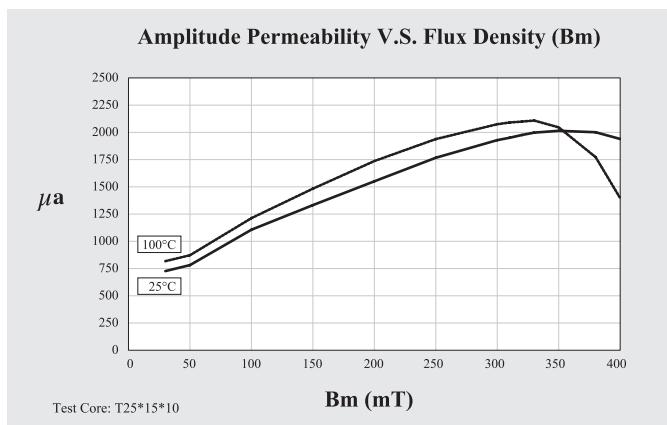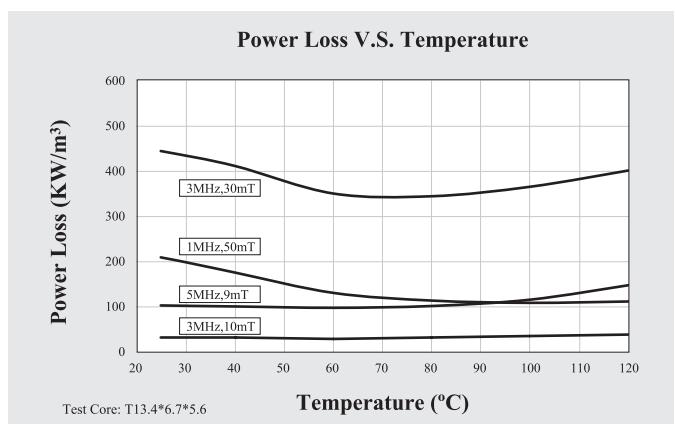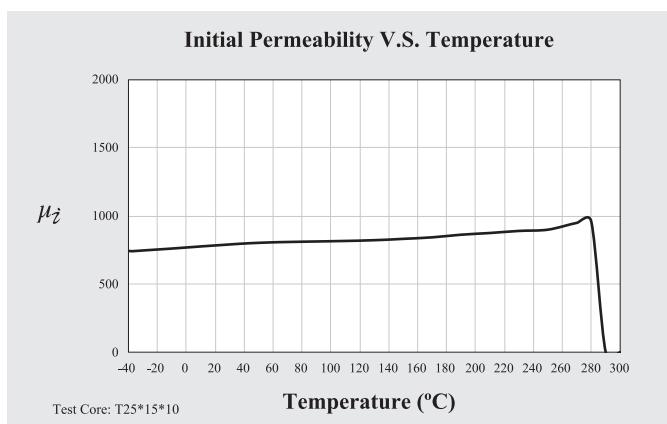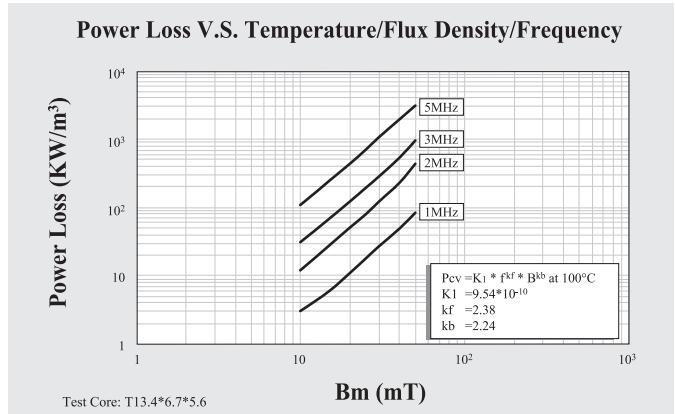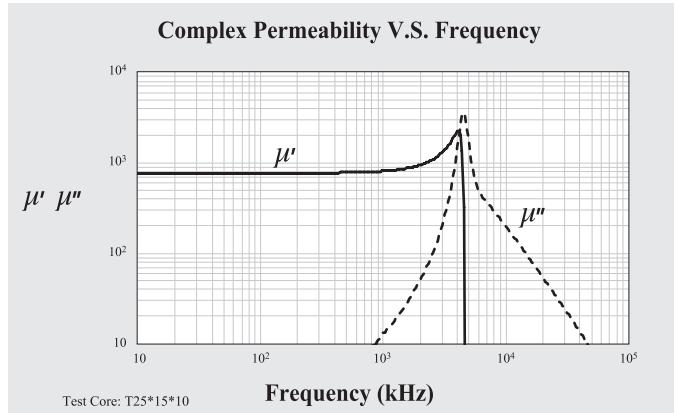

	Symbol	Unit	Measuring Conditions		High Frequency Low Loss Material
			Freq.	Flux den.	Temp.
Initial Permeability	$\mu_i$		≤ 10kHz	0.25mT	25°C
Amplitude Permeability	$\mu_a$		25kHz	200mT	25°C
					100°C
					> 1800
Power Loss	Pv	KW/m <sup>3</sup>	1MHz	50mT	25°C
					100°C
			2MHz	80mT	25°C
					100°C
			3MHz	10mT	25°C
					100°C
			3MHz	30mT	25°C
					100°C
			5MHz	9mT	25°C
					100°C
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C
					100°C
Remanence	Br	mT	10kHz	H = 1200A/m	25°C
					100°C
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C
					100°C
Hysteresis Material Constant	$\eta_B$	10 <sup>-6</sup> /mT	10kHz	1.5-3.0mT	25°C
Disaccommodation Factor	D <sub>f</sub>	10 <sup>-6</sup>	10kHz	< 0.25 mT	25°C
Curie Temperature	T <sub>c</sub>	°C			≥ 280
Resistivity	$\rho$	Ωm			10.00
Density	d	g/cm <sup>3</sup>			4.80

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

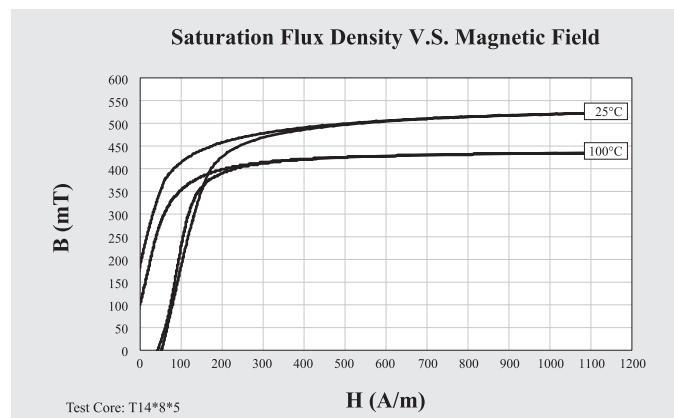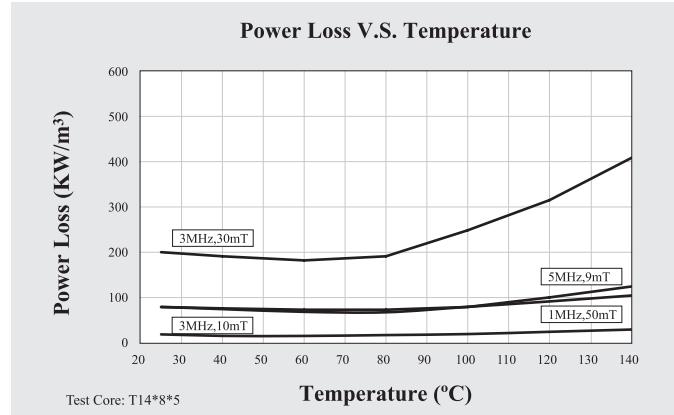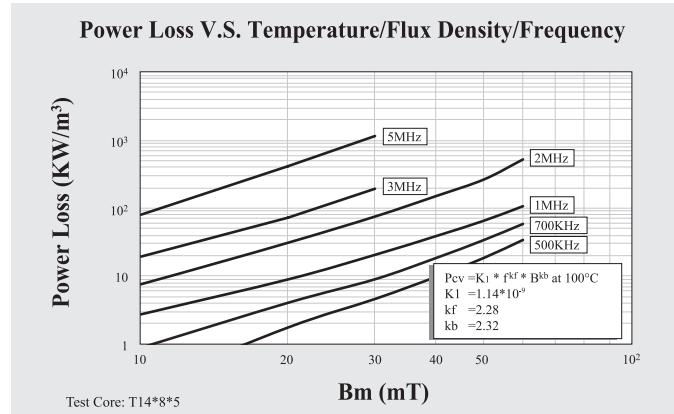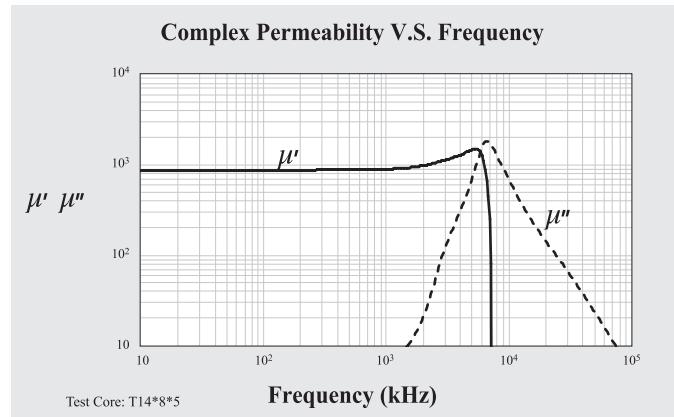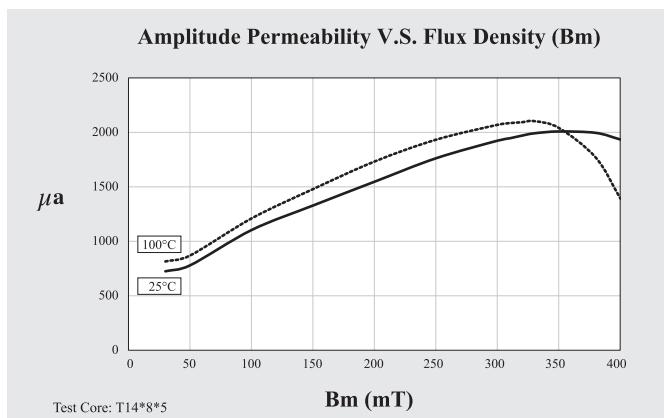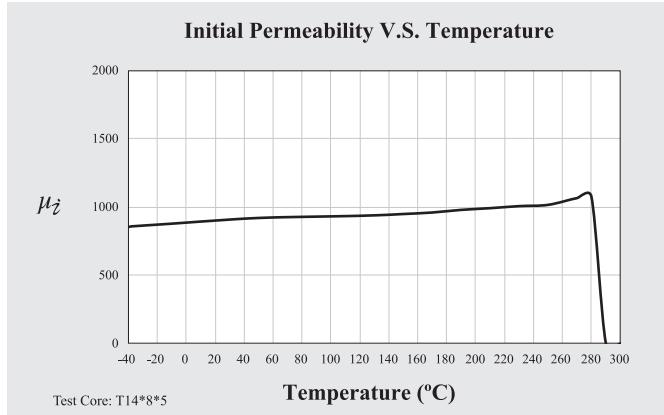

	Symbol	Unit	Measuring Conditions			Conventional High $\mu$ For CM Chokes Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$10000 \pm 30\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 10
			100kHz		25°C	< 60
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	410
					100°C	210
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	140
					100°C	110
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	0 ~ 1.5
					20 ~ 70°C	-0.5 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	T_c	°C				$\geq 130$
Resistivity	$\rho$	Ωm				0.15
Density	d	g/cm³				4.90

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

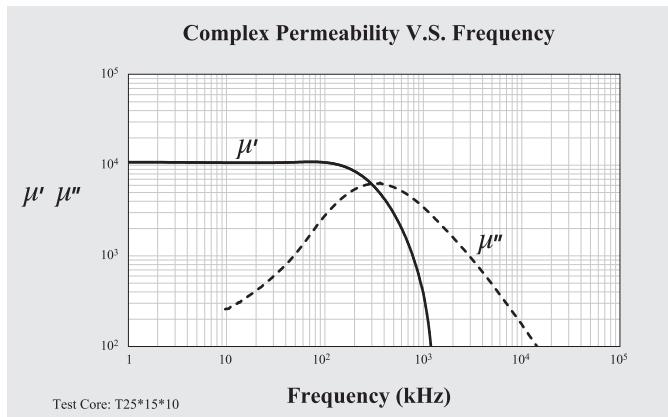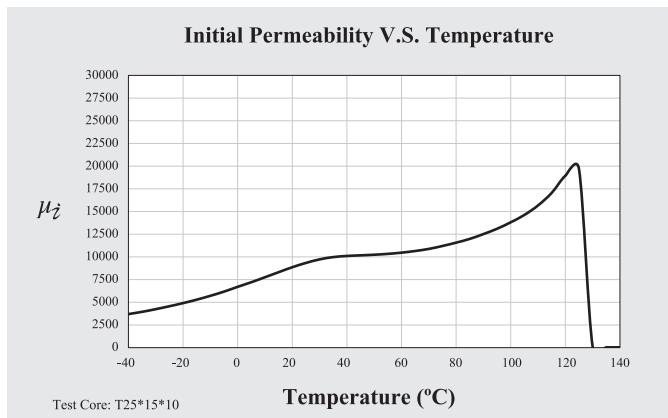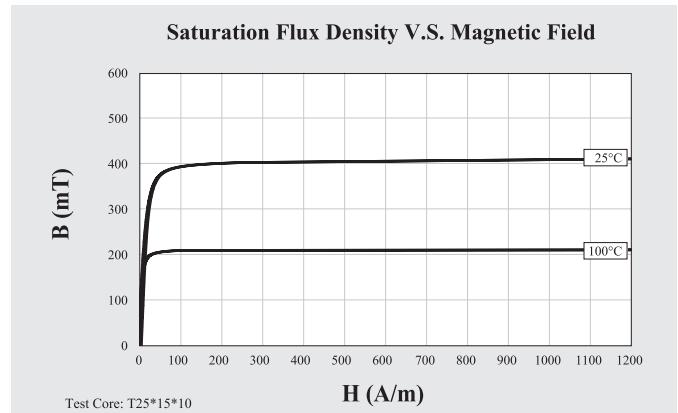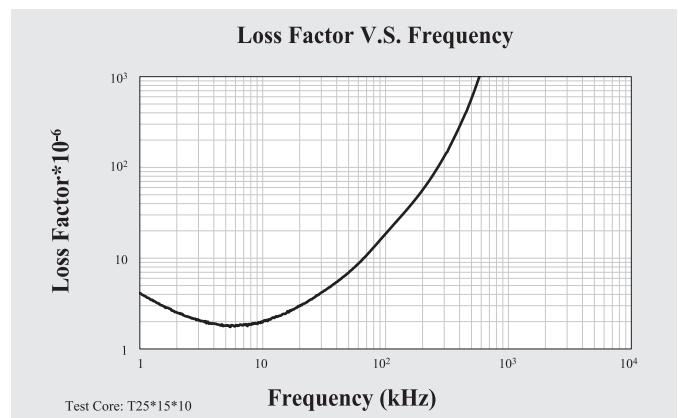

	Symbol	Unit	Measuring Conditions			Conventional High $\mu$ For CM Chokes Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$12000 \pm 30\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 10
			100kHz		25°C	< 60
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	380
					100°C	180
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	130
					100°C	110
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	0 ~ 1.5
					20 ~ 70°C	-0.5 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	T_c	°C				$\geq 110$
Resistivity	$\rho$	Ωm				0.12
Density	d	g/cm³				4.90

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

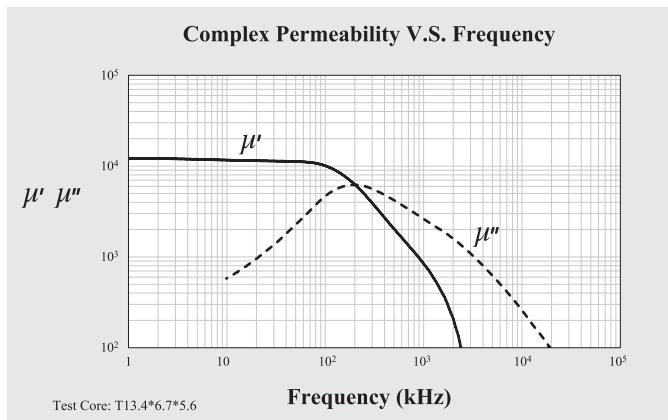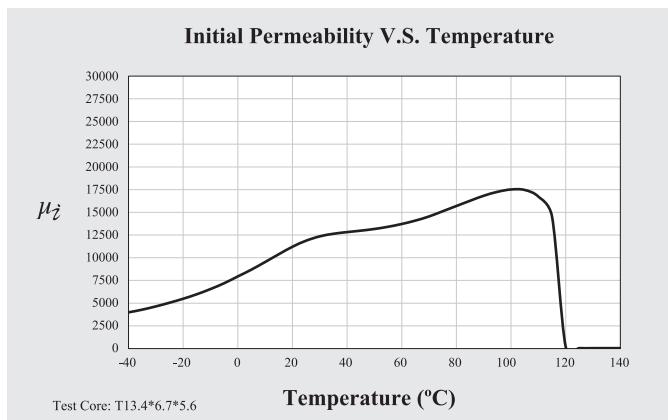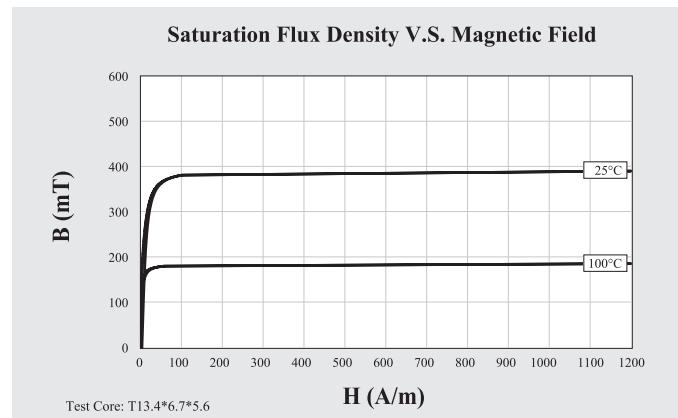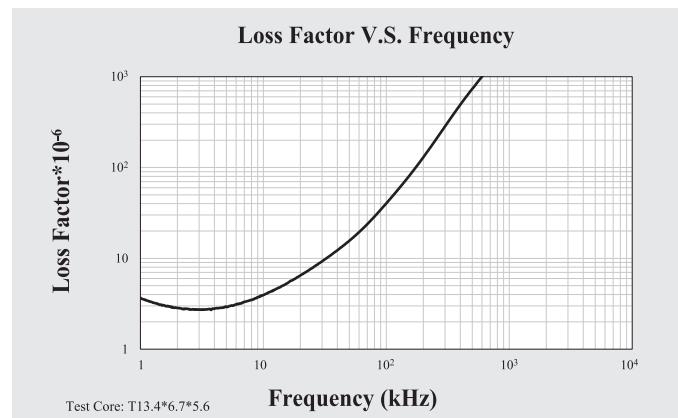

	Symbol	Unit	Measuring Conditions			Conventional High $\mu$ For CM Chokes Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$12000 \pm 30\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 8
			100kHz		25°C	< 40
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	400
					100°C	200
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	120
					100°C	65
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	1 ~ 3
					20 ~ 70°C	-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	T_c	°C				$\geq 125$
Resistivity	$\rho$	Ωm				0.15
Density	d	g/cm³				4.90

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

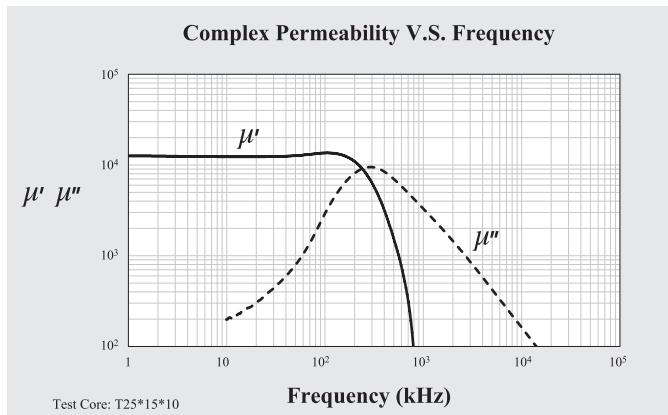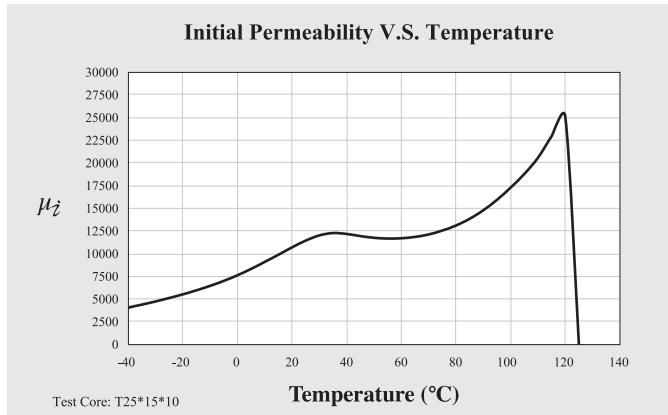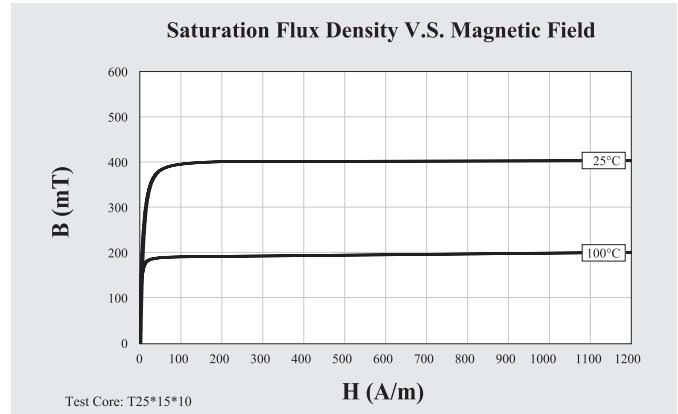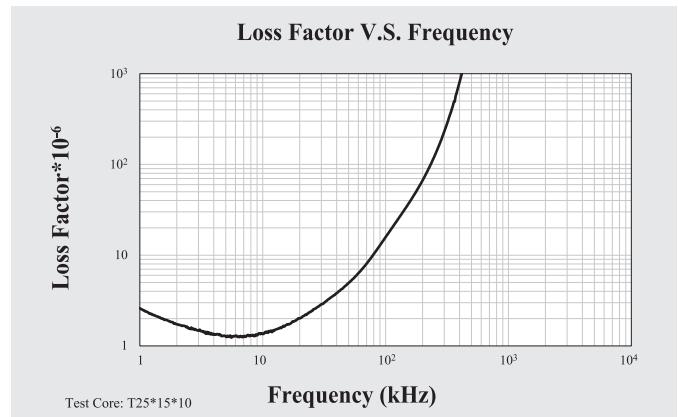

	Symbol	Unit	Measuring Conditions			Conventional High $\mu$ For CM Chokes Material
			Freq.	Flux den.	Temp.	A151
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$15000 \pm 30\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 10
			100kHz		25°C	< 110
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	400
					100°C	170
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	220
					100°C	100
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	-1 ~ 1
					20 ~ 70°C	-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	T_c	°C				$\geq 110$
Resistivity	$\rho$	Ωm				0.10
Density	d	g/cm³				5.00

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

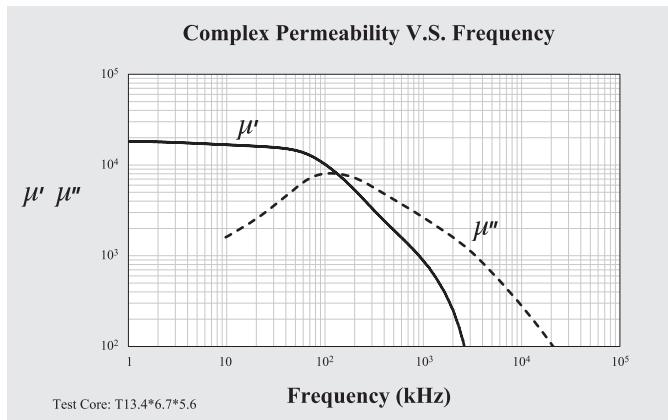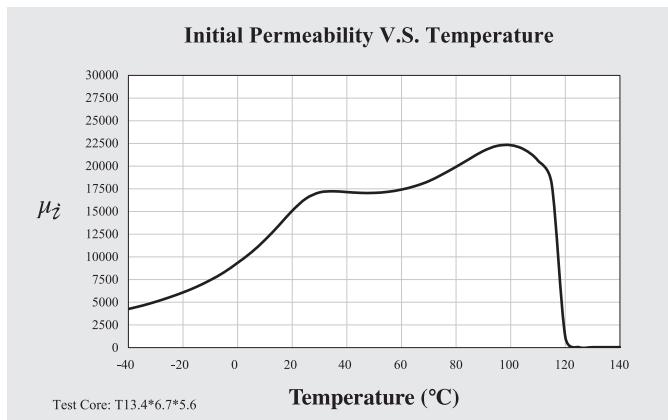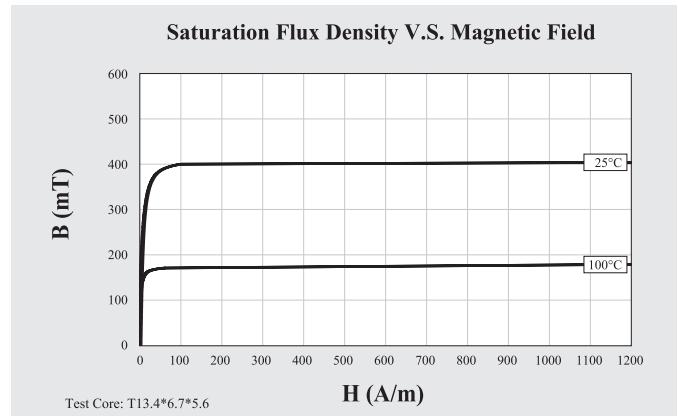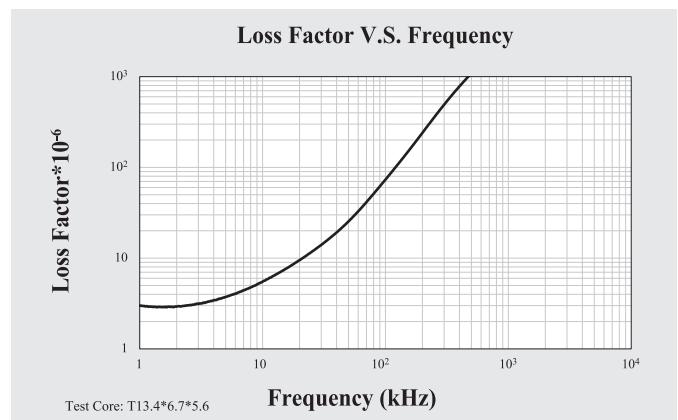

	Symbol	Unit	Measuring Conditions			Wide Band Filter Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$5000 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 4
			100kHz		25°C	< 15
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	440
					100°C	300
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	80
					100°C	90
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	0 ~ 2
					20 ~ 70°C	0 ~ 2
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.8
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 3
Curie Temperature	Tc	°C				$\geq 140$
Resistivity	$\rho$	Ωm				0.20
Density	d	g/cm³				4.85

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

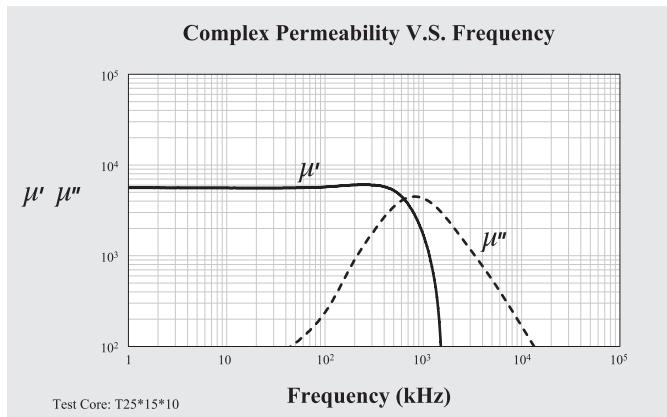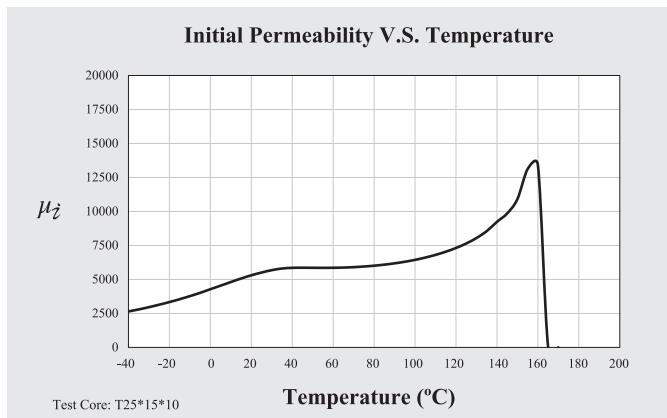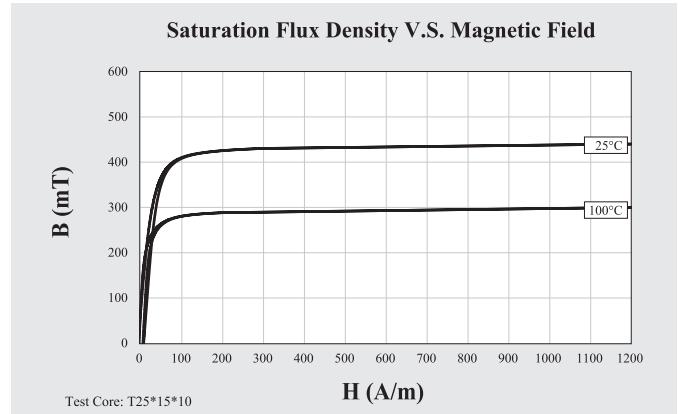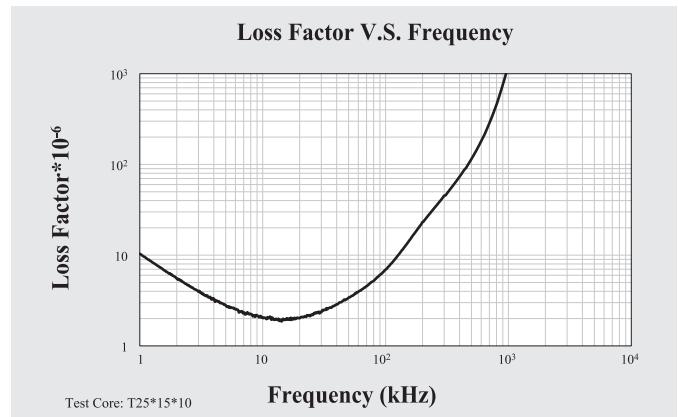

	Symbol	Unit	Measuring Conditions			Wide Band Filter Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$6000 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 4
			100kHz		25°C	< 15
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	420
					100°C	280
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	70
					100°C	80
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	0 ~ 2.5
					20 ~ 70°C	0 ~ 2.5
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.8
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 3
Curie Temperature	T_c	°C				$\geq 140$
Resistivity	$\rho$	Ωm				0.20
Density	d	g/cm³				4.85

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

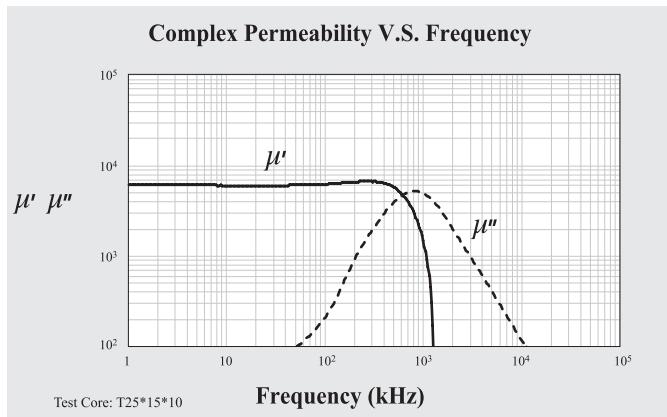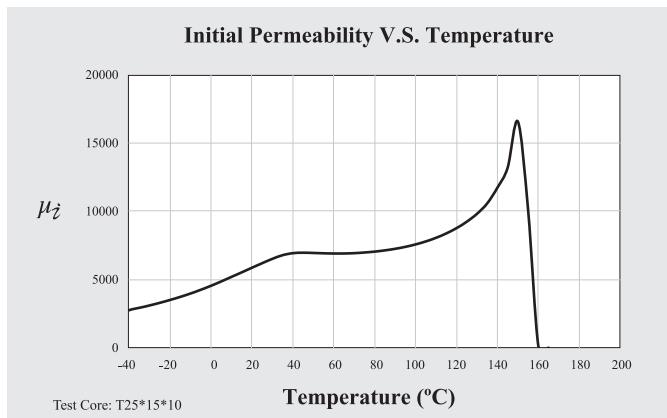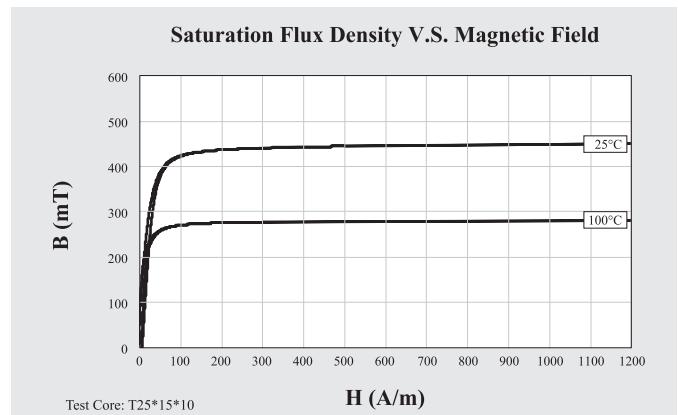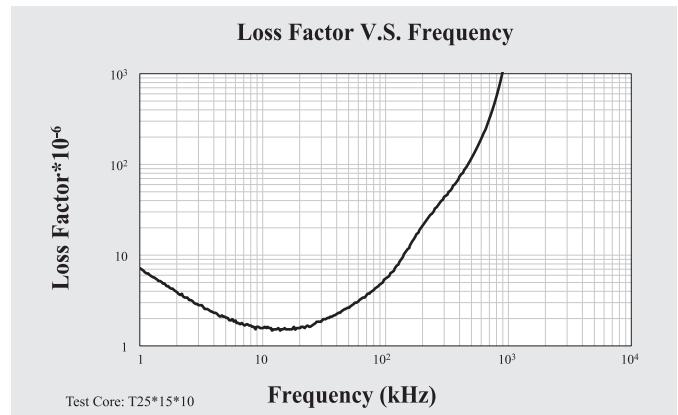

	Symbol	Unit	Measuring Conditions			Wide Band Filter Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$7000 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 8
			100kHz		25°C	< 30
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	400
					100°C	200
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	150
					100°C	110
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	-1 ~ 1
					20 ~ 70°C	-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1.2
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	Tc	°C				$\geq 130$
Resistivity	$\rho$	Ωm				0.35
Density	d	g/cm³				4.90

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

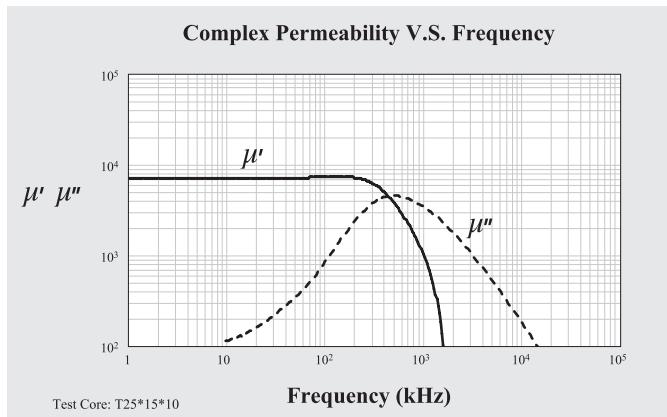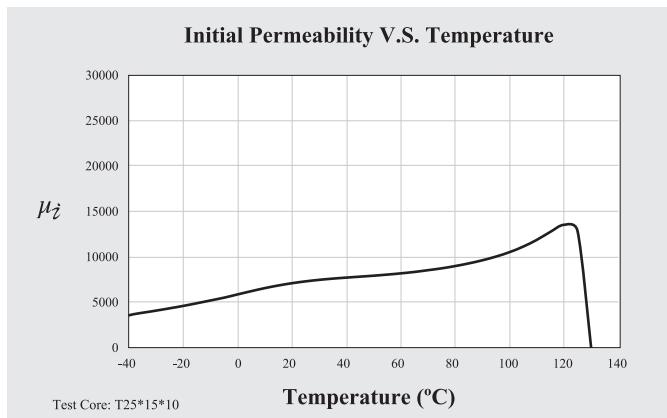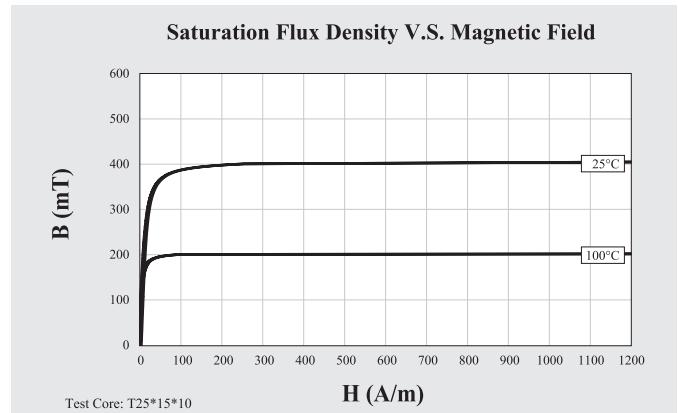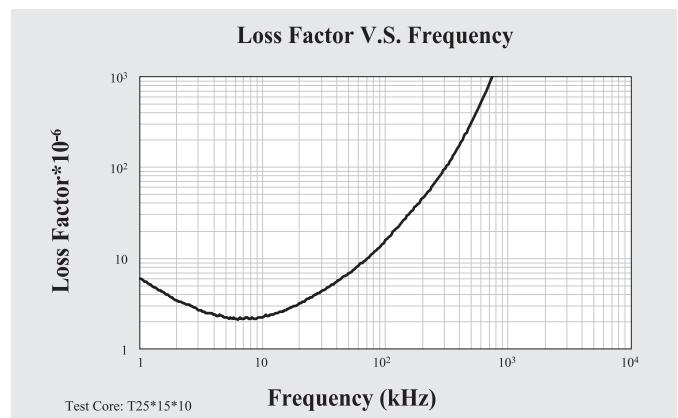

	Symbol	Unit	Measuring Conditions			Wide Band Filter Material A071
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$7000 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 8
			100kHz		25°C	< 30
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	440
					100°C	280
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	80
					100°C	60
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	-1 ~ 1
					20 ~ 70°C	-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1.2
Disaccommodation Factor	D <sub>F</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	T <sub>C</sub>	°C				$\geq 145$
Resistivity	$\rho$	Ωm				0.35
Density	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

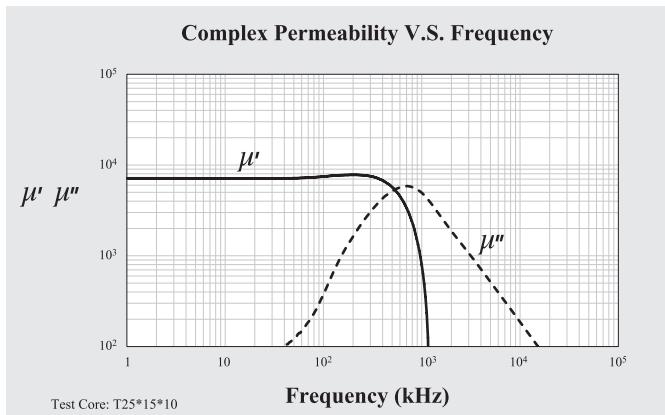
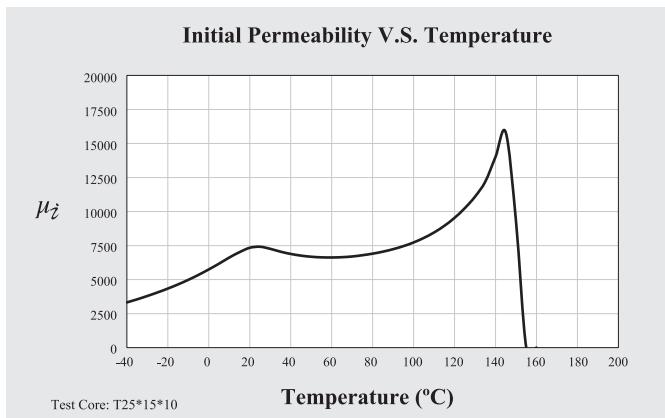
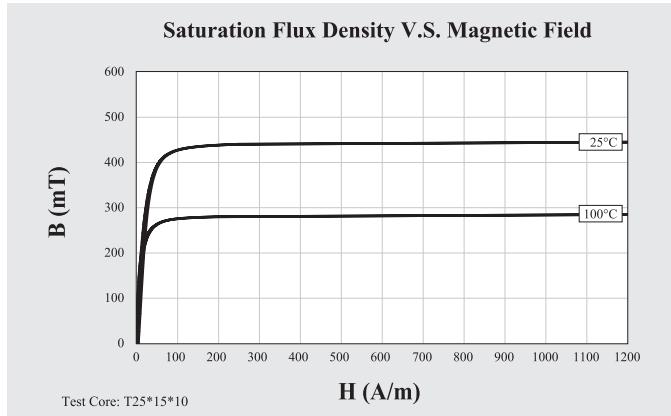
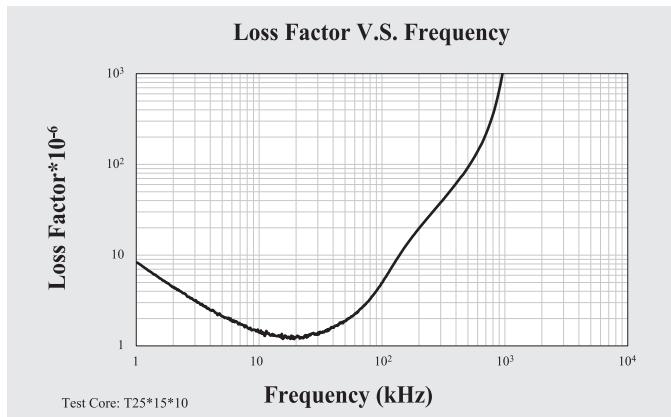


	Symbol	Unit	Measuring Conditions			Wide Band Filter Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$10000 \pm 30\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 10
			100kHz		25°C	< 60
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	380
					100°C	180
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	95
					100°C	75
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	-1 ~ 1
					20 ~ 70°C	-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	T_c	°C				$\geq 120$
Resistivity	$\rho$	Ωm				0.15
Density	d	g/cm³				4.90

Remark: Best impedance, and permeability v. s. frequency performance for  $10,000\mu_i$  materials.

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

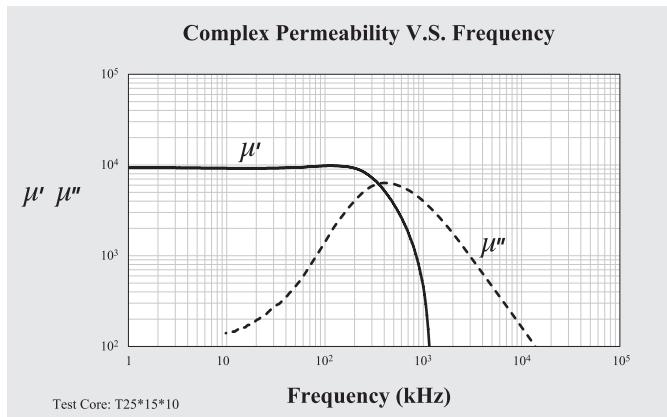
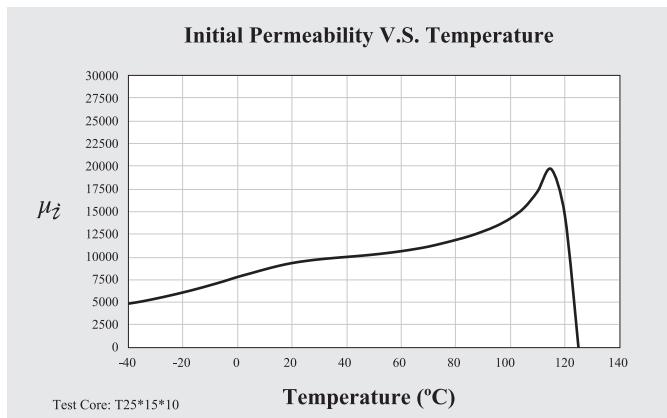
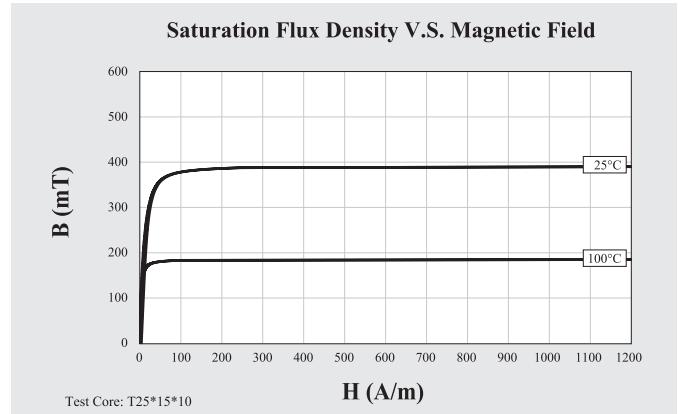
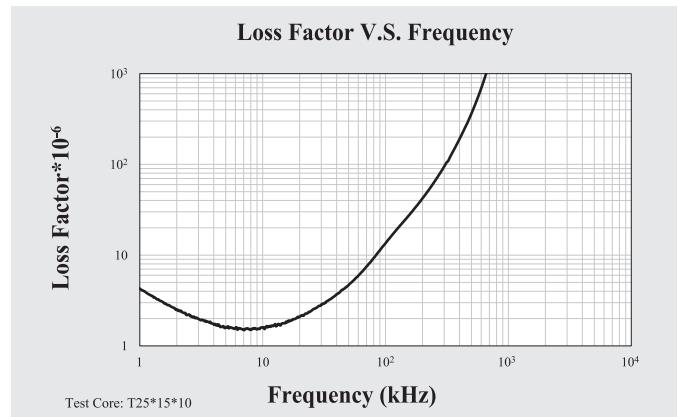


	Symbol	Unit	Measuring Conditions			Wide Band Filter Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		≤ 10kHz	0.25mT	25°C	10000 ± 30%
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 10
			100kHz		25°C	< 30
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	420
					100°C	220
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	70
					100°C	65
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^{\circ}\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	1 ~ 2
					20 ~ 70°C	-0.5 ~ 0.5
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	Tc	°C				≥ 130
Resistivity	$\rho$	Ωm				0.15
Density	d	g/cm³				4.90

Remark: Best impedance, and permeability v. s. frequency performance for 10,000 $\mu_i$  materials.

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

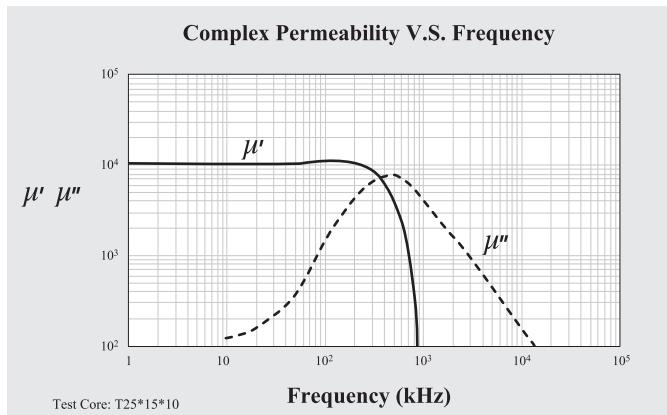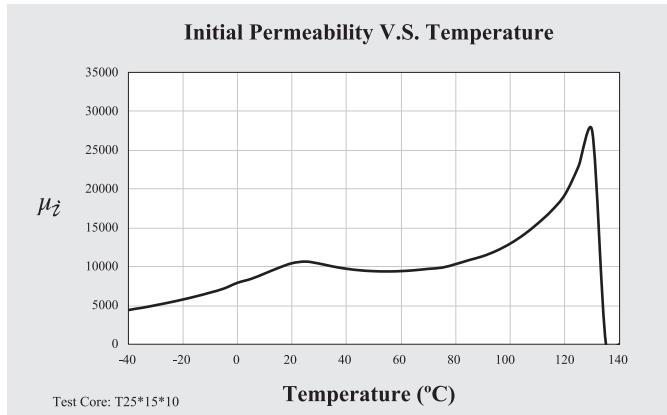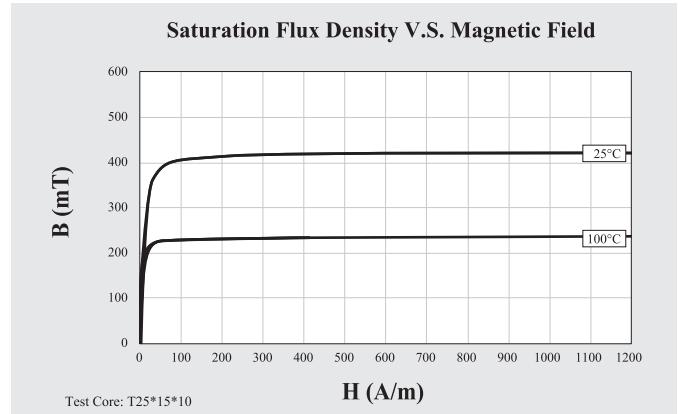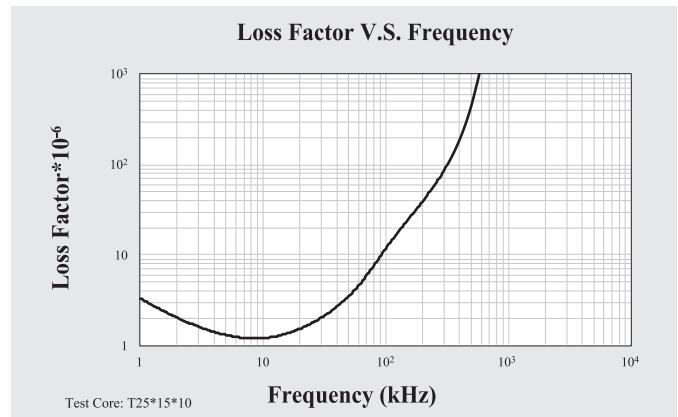

	Symbol	Unit	Measuring Conditions			High $\mu$ & Tc For Automotives Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$7000 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	$< 0.25\text{mT}$	25°C	< 5
			100kHz		25°C	< 15
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	485
					100°C	340
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	95
					100°C	80
Temperature Factor of Permeability	$\alpha_i$	$10^{-6}/^\circ\text{C}$	10kHz	$< 0.25\text{ mT}$	0 ~ 20°C	1.5 ~ 3.5
					20 ~ 70°C	-1.5 ~ 1.5
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 1.0
Disaccommodation Factor	D <sup>f</sup>	$10^{-6}$	10kHz	$< 0.25\text{ mT}$	25°C	< 1.0
Curie Temperature	T <sub>c</sub>	°C				$\geq 180$
Resistivity	$\rho$	Ωm				0.20
Density	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

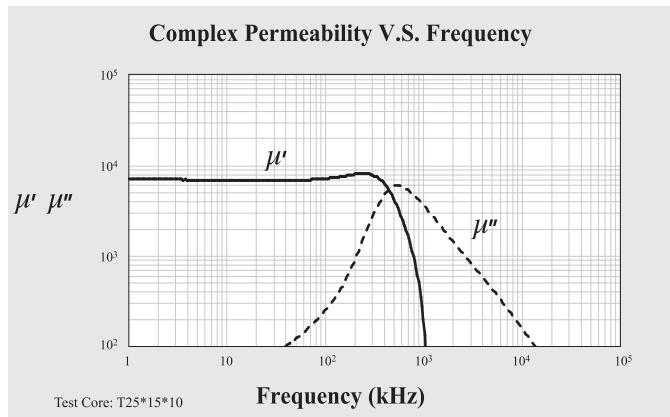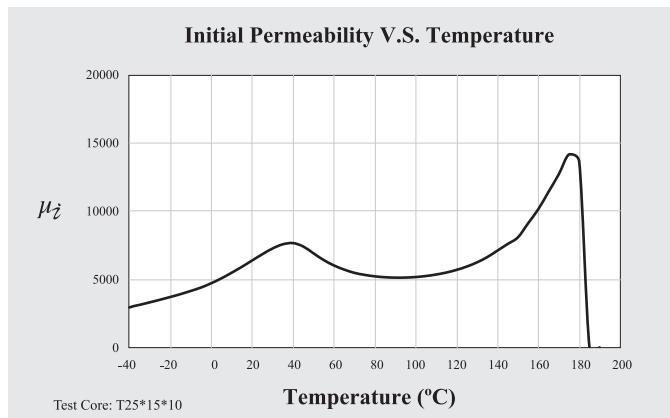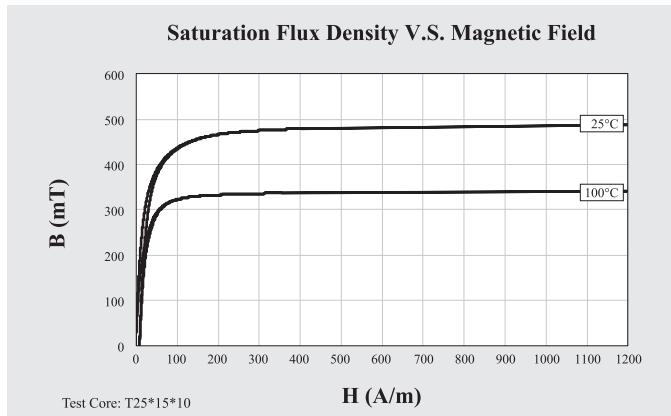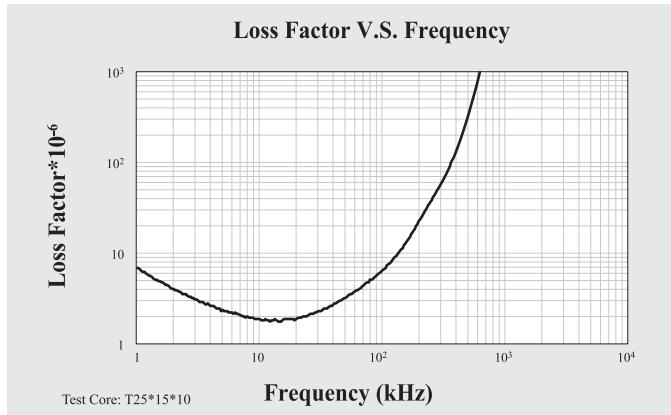

	Symbol	Unit	Measuring Conditions			High $\mu$ & Tc For Automotives Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$10000 \pm 30\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	$< 0.25\text{mT}$	25°C	< 10
			100kHz		25°C	< 30
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	460
					100°C	295
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	105
					100°C	105
Temperature Factor of Permeability	$\alpha_i$	$10^{-6}/^\circ\text{C}$	10kHz	$< 0.25\text{ mT}$	0 ~ 20°C	1 ~ 3
					20 ~ 70°C	-1.5 ~ 0
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5
Disaccommodation Factor	D <sub>r</sub>	$10^{-6}$	10kHz	$< 0.25\text{ mT}$	25°C	< 2
Curie Temperature	T <sub>c</sub>	°C				≥ 155
Resistivity	$\rho$	Ωm				0.15
Density	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

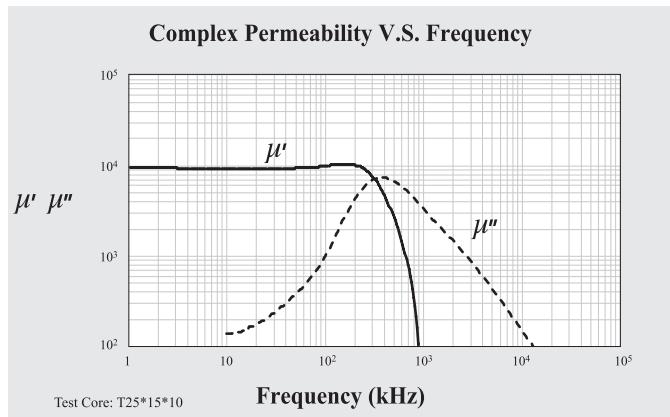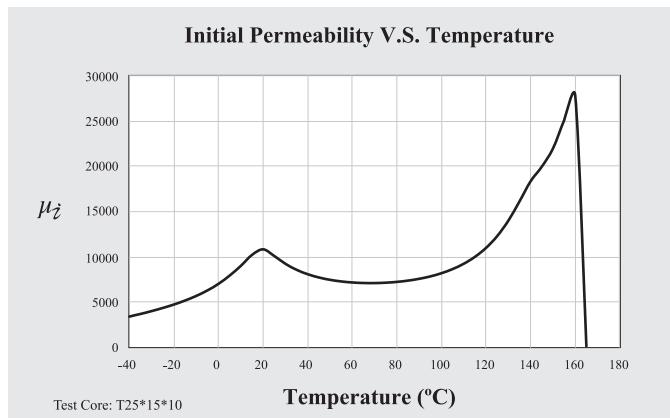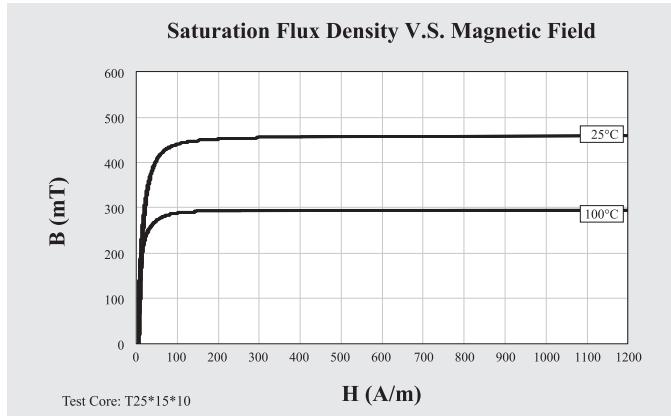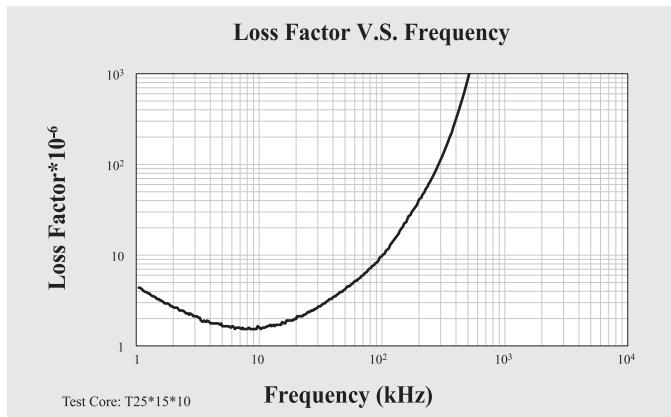

	Symbol	Unit	Measuring Conditions			High $\mu$ Wide Temperature Material A044
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$4000 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 8
			100kHz		25°C	< 40
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	450
					100°C	315
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	55
					100°C	45
Temperature Factor of Permeability	$\alpha_i$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	-1 ~ 1
					20 ~ 70°C	-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5
Disaccommodation Factor	D <sub>r</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	T <sub>c</sub>	°C				$\geq 170$
Resistivity	$\rho$	Ωm				1.00
Density	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

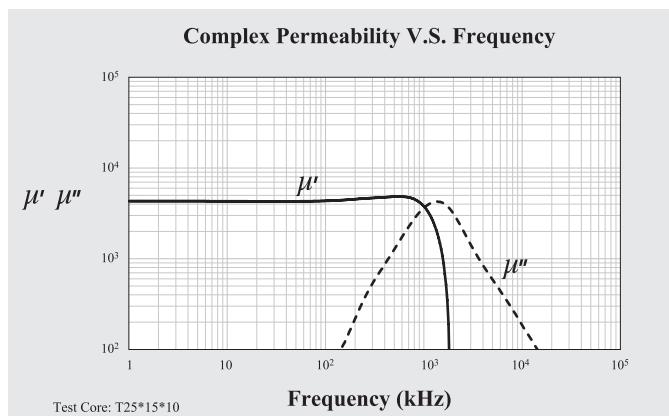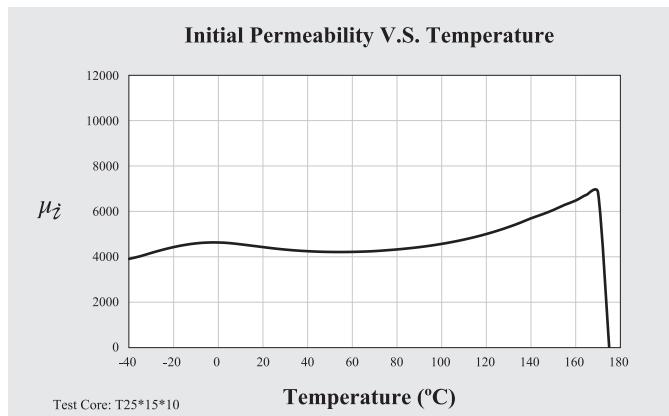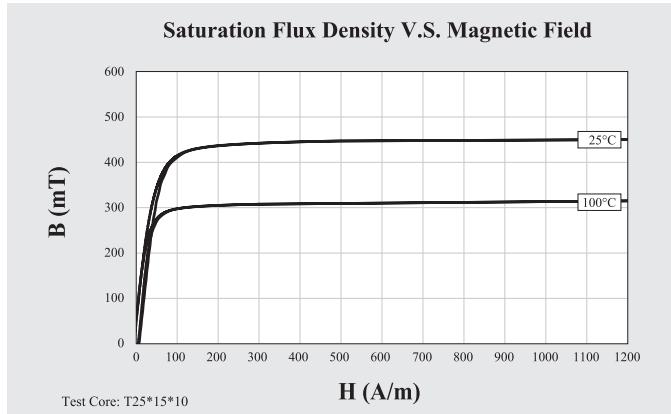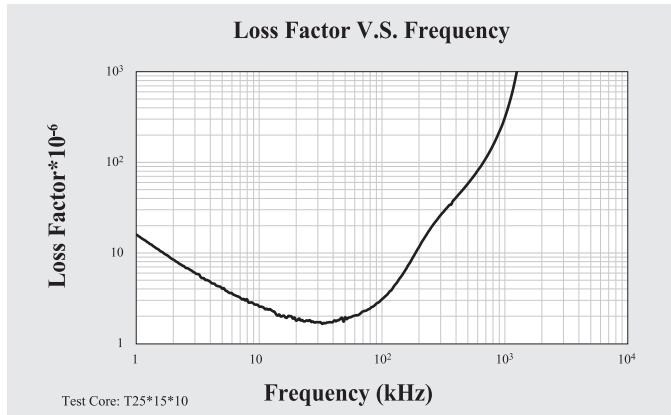

	Symbol	Unit	Measuring Conditions			High $\mu$ Wide Temperature Material A064
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$6000 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 8
			100kHz		25°C	< 40
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	470
					100°C	330
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	135
					100°C	115
Temperature Factor of Permeability	$\alpha_i$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	-1 ~ 1
					20 ~ 70°C	-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5
Disaccommodation Factor	D <sub>r</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	T <sub>c</sub>	°C				$\geq 170$
Resistivity	$\rho$	Ωm				1.00
Density	d	g/cm <sup>3</sup>				4.90

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

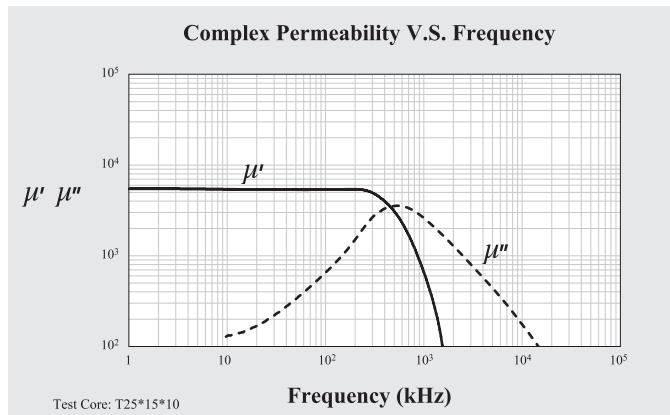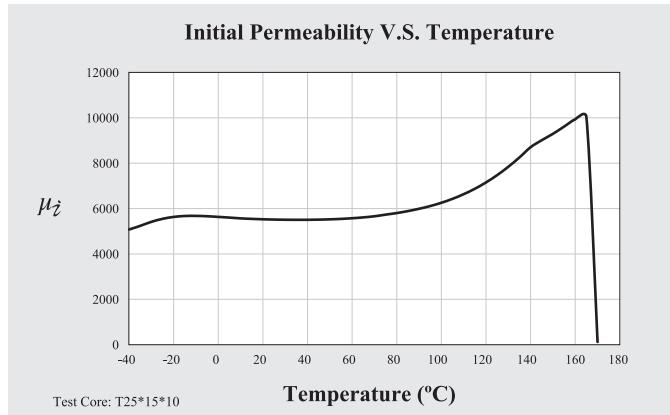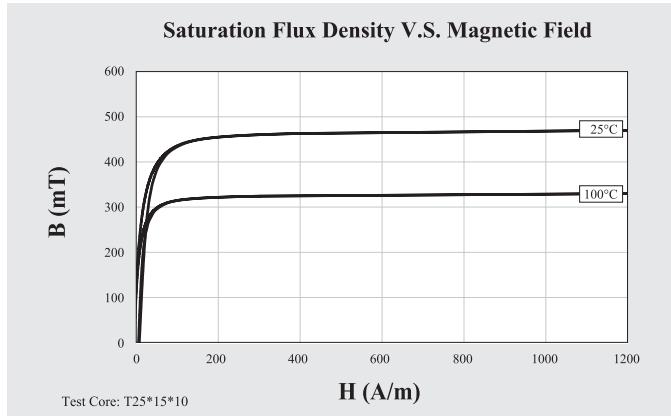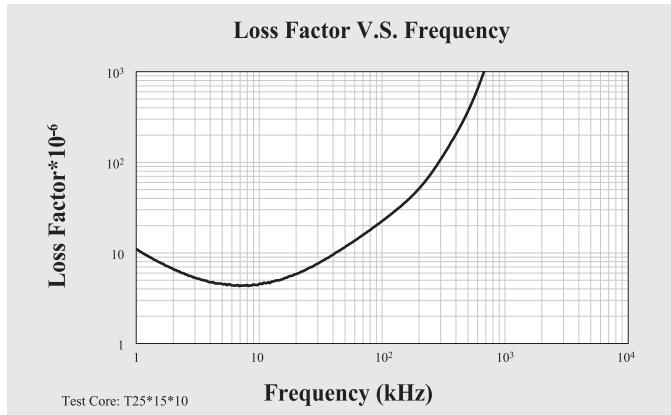

	Symbol	Unit	Measuring Conditions			High $\mu$ Wide Temperature Material
			Freq.	Flux den.	Temp.	
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$10000 \pm 30\%$
					-20°C	> 9000
<b>Relative Loss Factor</b>	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 10
			100kHz		25°C	< 90
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	380
					100°C	130
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	160
					100°C	110
<b>Temperature Factor of Permeability</b>	$\alpha_\mu$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	-1 ~ 0
					20 ~ 70°C	-1 ~ 1
<b>Hysteresis Material Constant</b>	$\eta_\mu$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5
<b>Disaccommodation Factor</b>	D <sub>f</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
<b>Curie Temperature</b>	T <sub>c</sub>	°C				$\geq 100$
<b>Resistivity</b>	$\rho$	Ωm				0.12
<b>Density</b>	d	g/cm <sup>3</sup>				5.00

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

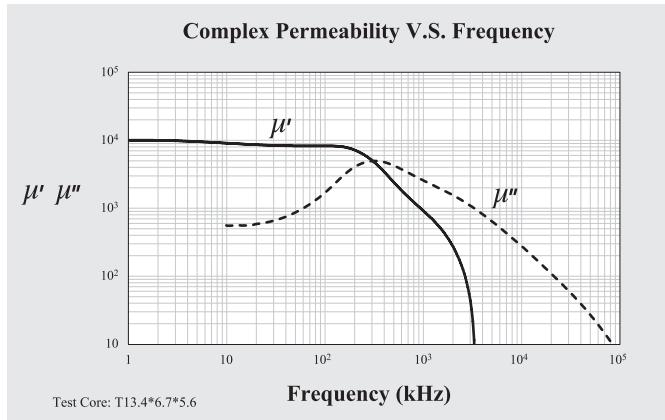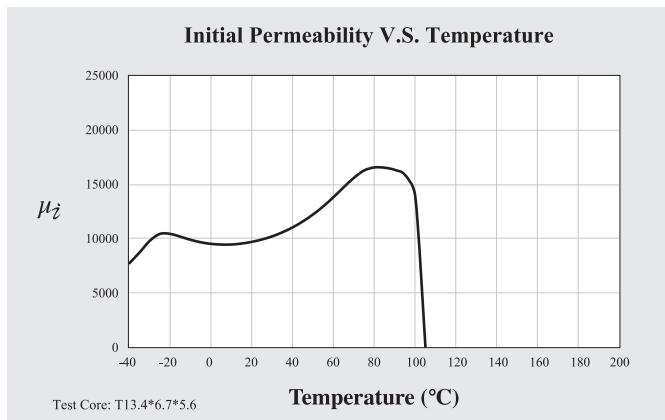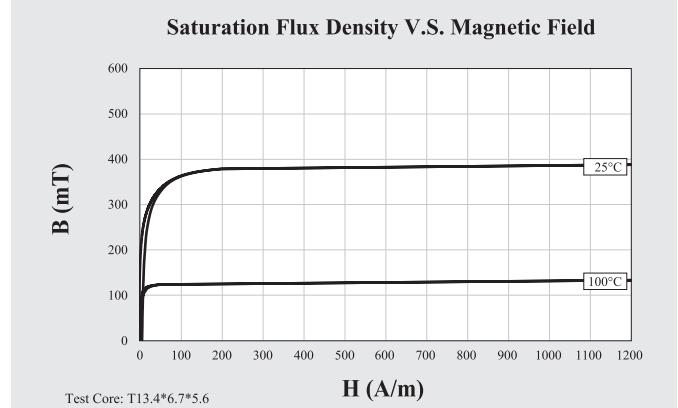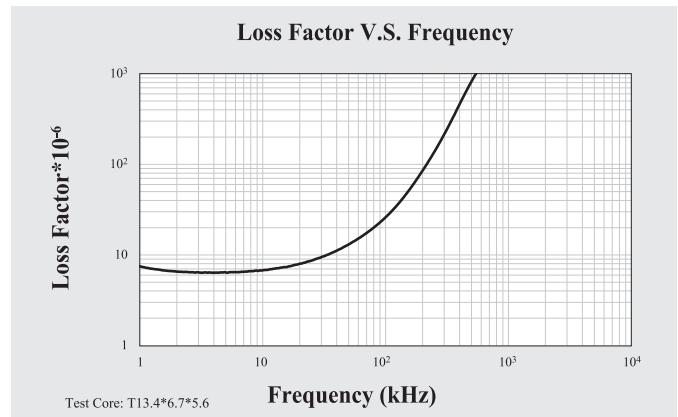

	Symbol	Unit	Measuring Conditions		For Wide Temperature LAN Material
			Freq.	Flux den.	Temp.
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C
			100kHz		25°C
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C
					100°C
Remanence	Br	mT	10kHz	H = 1200A/m	25°C
					100°C
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C
					20 ~ 70°C
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C
Curie Temperature	T_c	°C			$\geq 160$
Resistivity	$\rho$	Ωm			0.20
Density	d	g/cm³			4.85

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

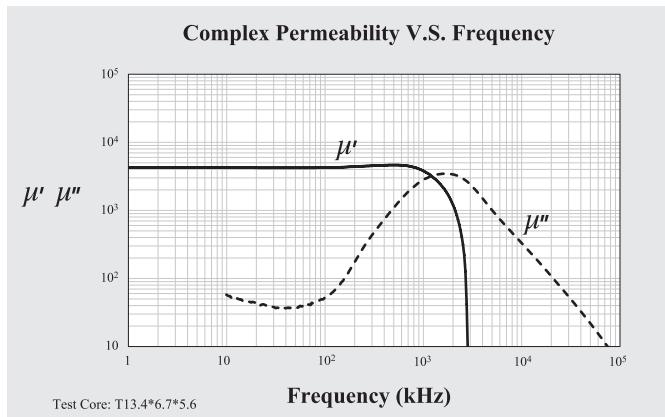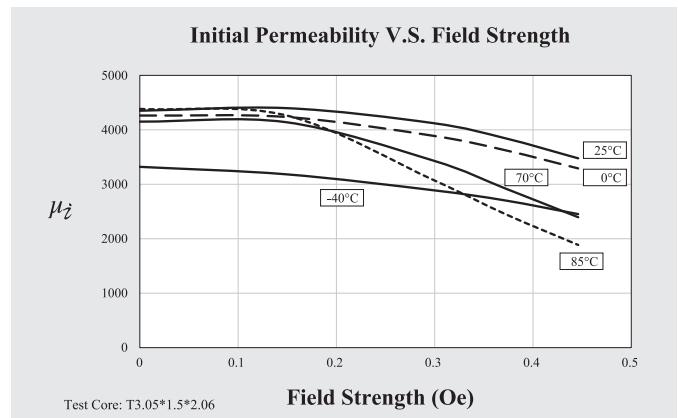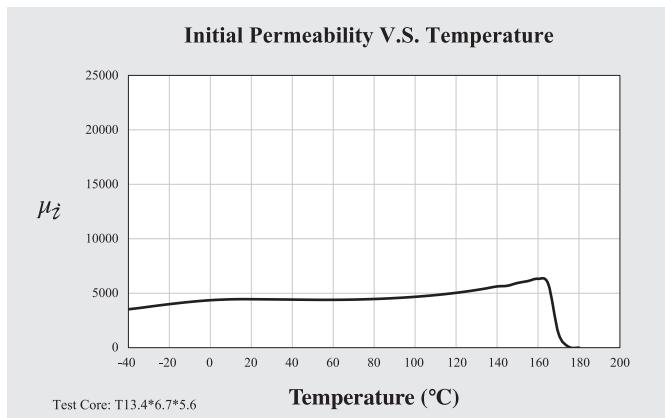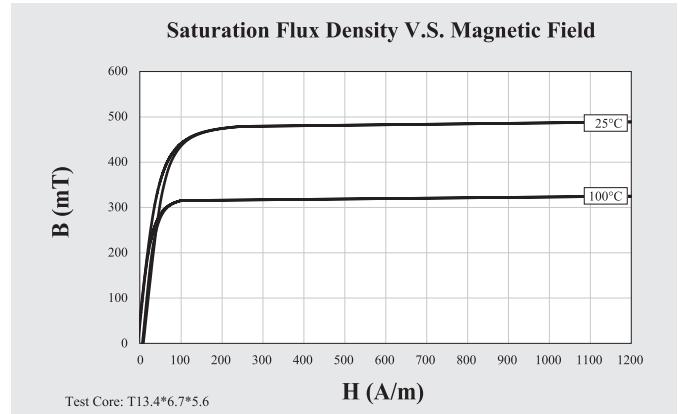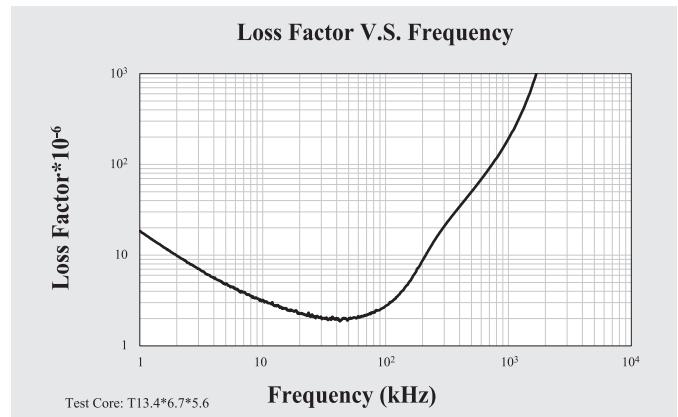

	Symbol	Unit	Measuring Conditions			For Wide Temperature LAN Material
			Freq.	Flux den.	Temp.	
<b>Initial Permeability</b>	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$6000 \pm 25\%$
<b>Relative Loss Factor</b>	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 10
			100kHz		25°C	< 30
<b>Saturation Flux Density</b>	Bs	mT	10kHz	H = 1200A/m	25°C	460
					100°C	320
<b>Remanence</b>	Br	mT	10kHz	H = 1200A/m	25°C	100
					100°C	80
<b>Temperature Factor of Permeability</b>	$\alpha_i$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	1 ~ 3
					20 ~ 70°C	-1 ~ 1
<b>Hysteresis Material Constant</b>	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.5
<b>Disaccommodation Factor</b>	D <sub>r</sub>	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
<b>Curie Temperature</b>	T <sub>c</sub>	°C				≥ 160
<b>Resistivity</b>	$\rho$	Ωm				0.20
<b>Density</b>	d	g/cm <sup>3</sup>				4.85

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

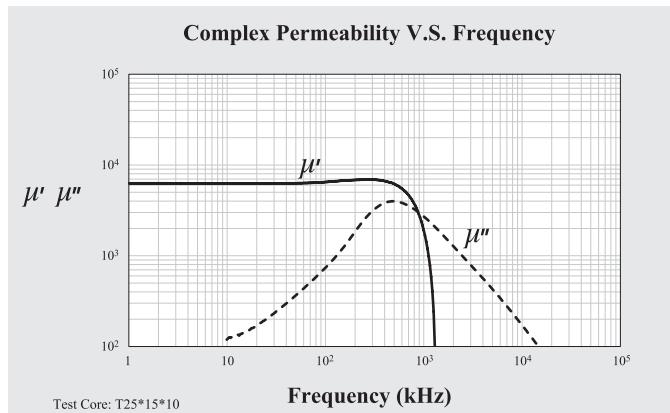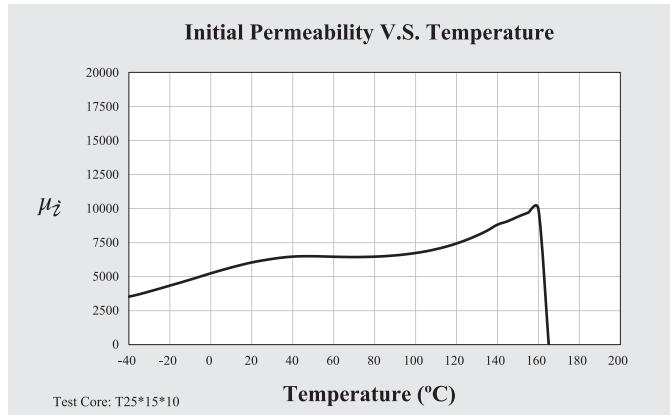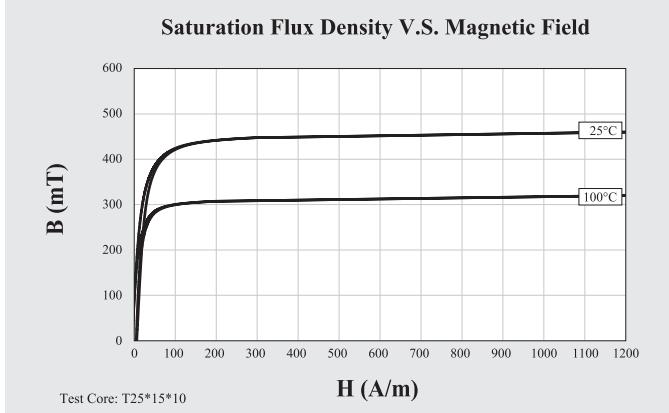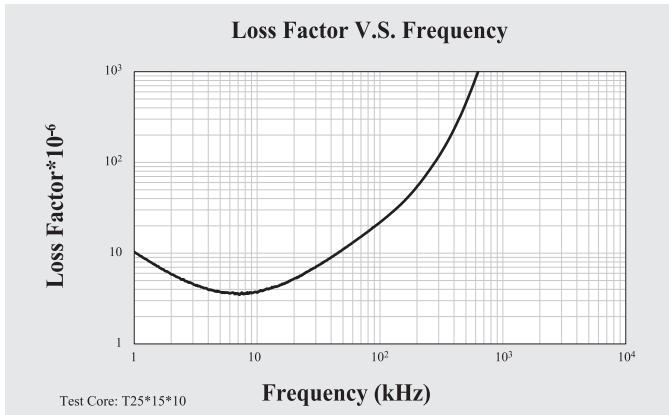

	Symbol	Unit	Measuring Conditions		For Wide Temperature LAN Material
			Freq.	Flux den.	Temp.
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C
			100kHz		25°C
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C
					100°C
Remanence	Br	mT	10kHz	H = 1200A/m	25°C
					100°C
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C
					20 ~ 70°C
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C
Curie Temperature	T_c	$^\circ\text{C}$			$\geq 130$
Resistivity	$\rho$	$\Omega\text{m}$			0.15
Density	d	$\text{g}/\text{cm}^3$			4.90

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

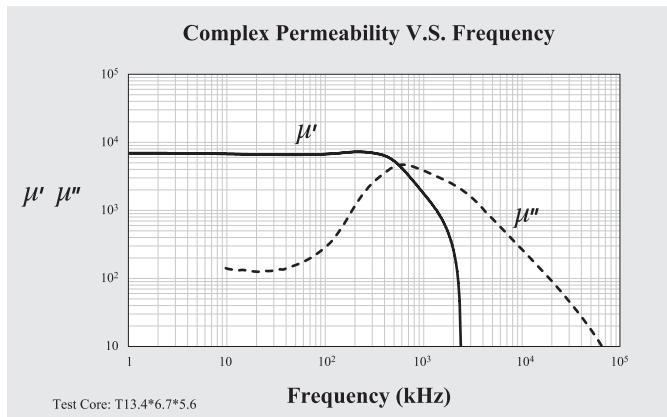
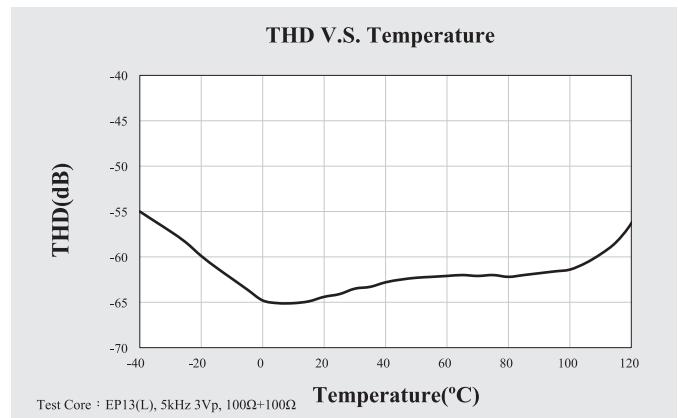
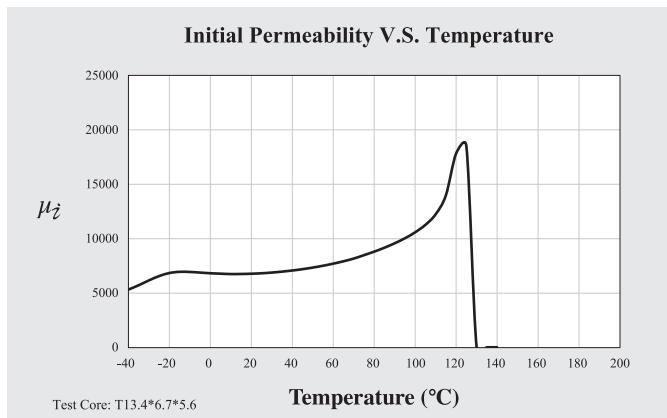
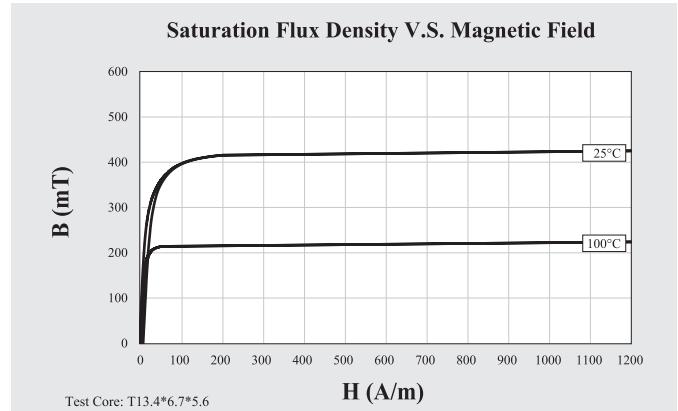
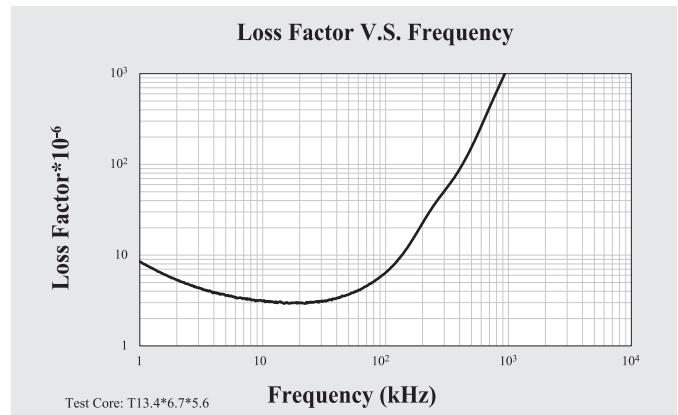


	Symbol	Unit	Measuring Conditions			Low THD Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		≤ 10kHz	0.25mT	25°C	10000 ± 30%
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C	< 10
			100kHz		25°C	< 90
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	400
					100°C	220
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	175
					100°C	125
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}/^{\circ}\text{C}$	10kHz	< 0.25 mT	0 ~ 20°C	-1 ~ 1
					20 ~ 70°C	-1 ~ 1
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.2
Disaccommodation Factor	D_F	$10^{-6}$	10kHz	< 0.25 mT	25°C	< 2
Curie Temperature	Tc	°C				≥ 130
Resistivity	$\rho$	Ωm				0.15
Density	d	g/cm³				4.90

Remark: Best THD performance for 10,000 $\mu_i$  materials.

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

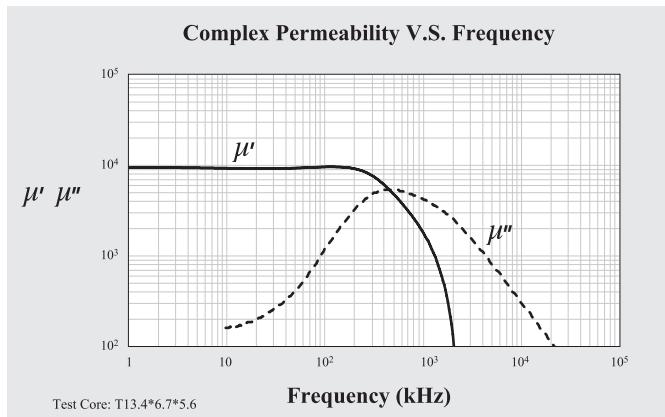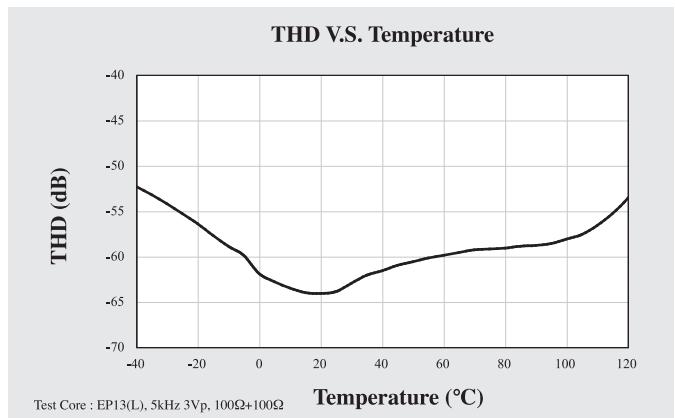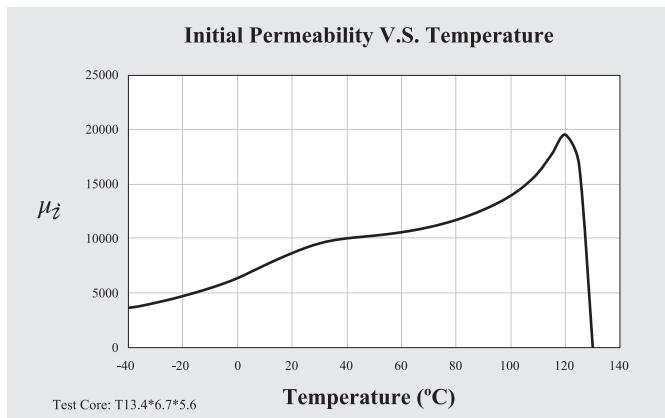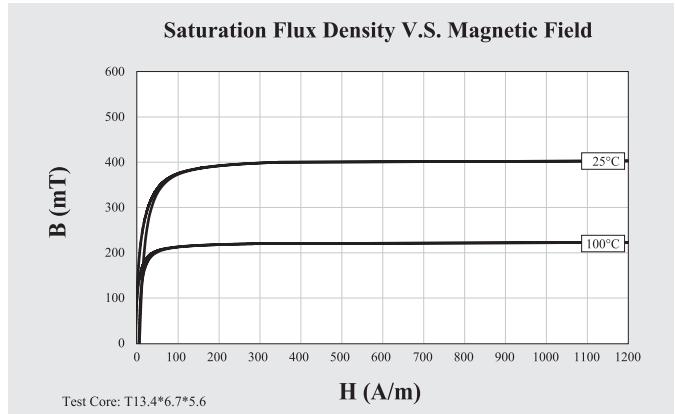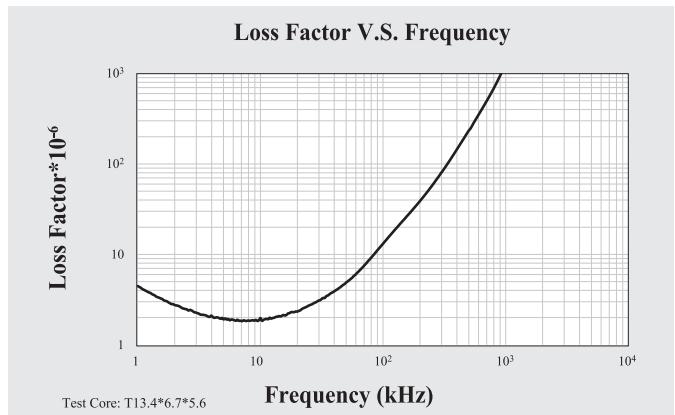

	Symbol	Unit	Measuring Conditions			Low $\eta_B$ Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$2500 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	$< 0.25\text{mT}$	25°C	< 7
			100kHz		25°C	< 3
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	450
					100°C	320
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	180
					100°C	150
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	14
					100°C	9
Temperature Factor of Permeability	$\alpha_r$	$10^{-6}/^\circ\text{C}$	10kHz	$< 0.25\text{ mT}$	5 ~ 25°C	< 1.3
					25 ~ 55°C	< 1.3
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.6
Curie Temperature	Tc	°C				$\geq 170$
Resistivity	$\rho$	Ωm				7.50
Density	d	g/cm³				4.70

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

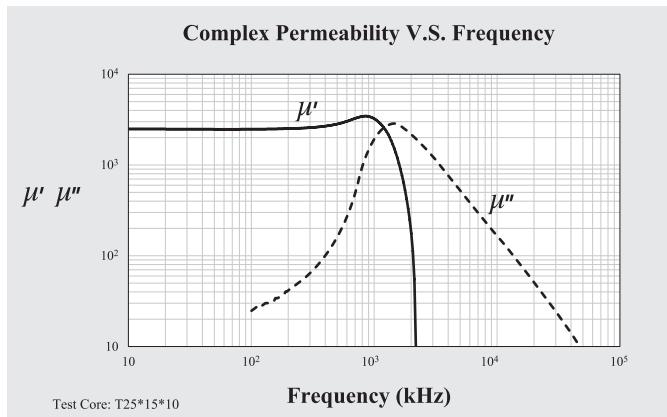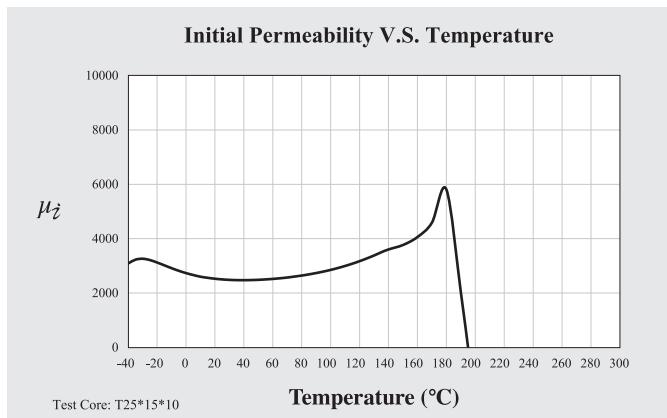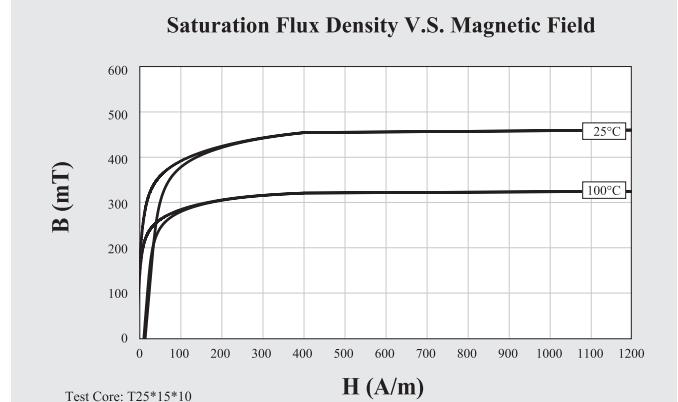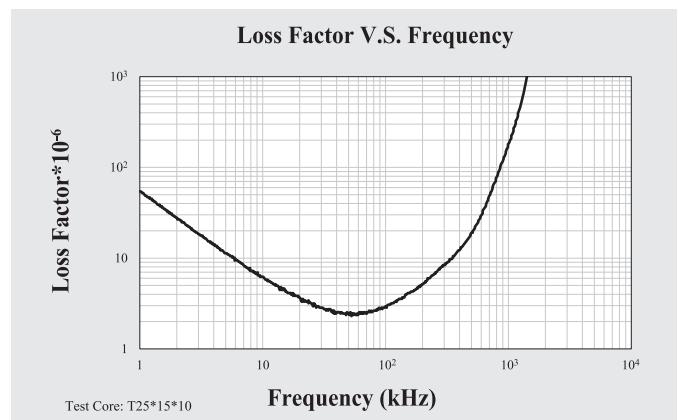

	Symbol	Unit	Measuring Conditions			Low $\eta_B$ Material
			Freq.	Flux den.	Temp.	N42
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$3800 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	$< 0.25\text{mT}$	25°C	< 3.5
			100kHz		25°C	< 3.5
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	530
					100°C	425
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	100
					100°C	125
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	9
					100°C	13
Temperature Factor of Permeability	$\alpha_\mu$	$10^{-6}/^\circ\text{C}$	10kHz	$< 0.25\text{ mT}$	5 ~ 25°C	7 ~ 9
					25 ~ 55°C	< 4 ~ -2
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.3
Curie Temperature	Tc	°C				$\geq 250$
Resistivity	$\rho$	Ωm				5.00
Density	d	g/cm³				4.90

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

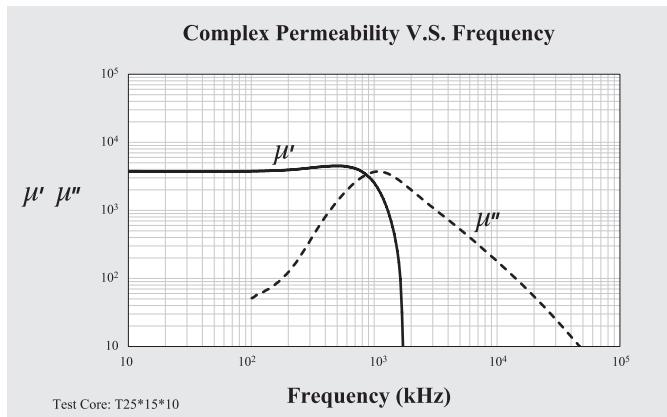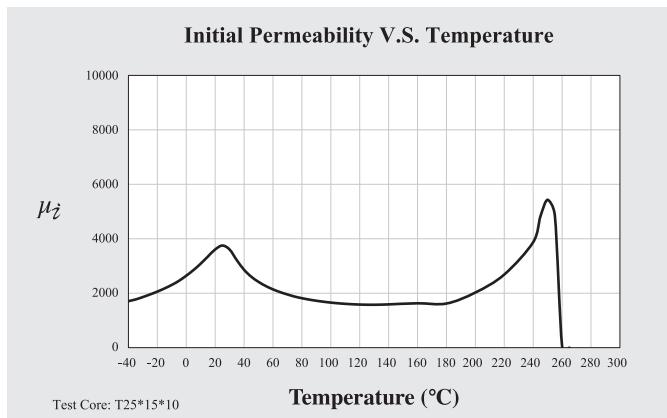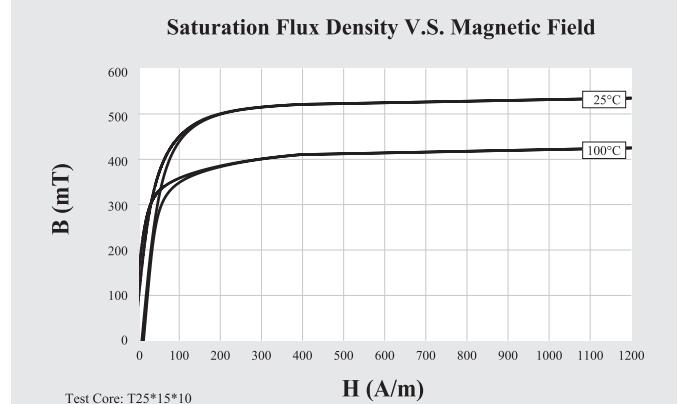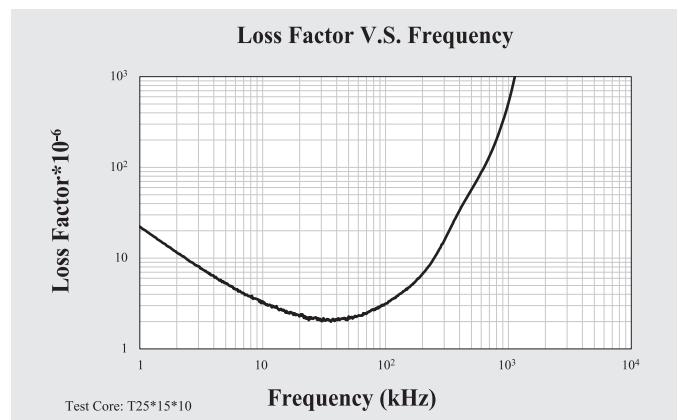

	Symbol	Unit	Measuring Conditions		Low $\eta_B$ Material
			Freq.	Flux den.	Temp.
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	< 0.25mT	25°C
			100kHz		25°C
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C
					100°C
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C
					100°C
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C
					100°C
Temperature Factor of Permeability	$\alpha_\mu$	$10^{-6}/^\circ\text{C}$	10kHz	< 0.25 mT	5 ~ 25°C
					25 ~ 55°C
Hysteresis Material Constant	$\eta_B$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C
Curie Temperature	Tc	°C			$\geq 250$
Resistivity	$\rho$	$\Omega\text{m}$			2.00
Density	d	$\text{g}/\text{cm}^3$			4.70

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

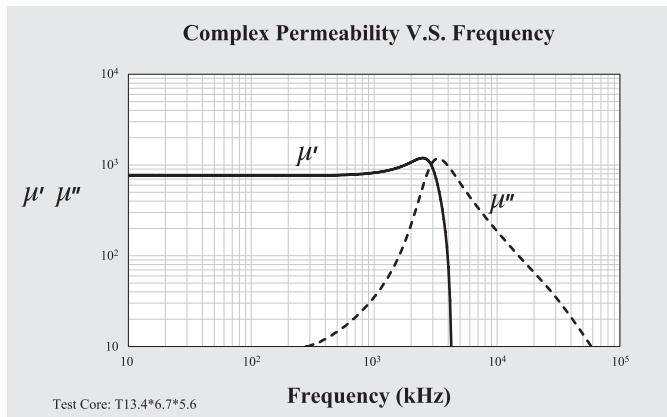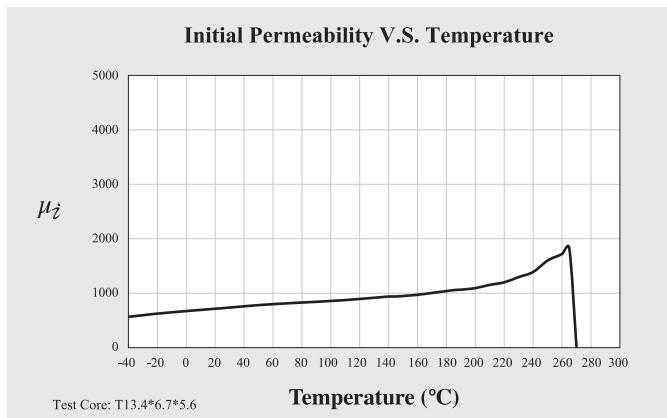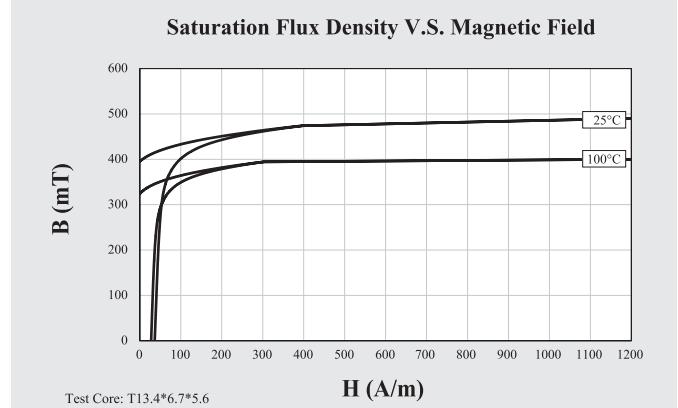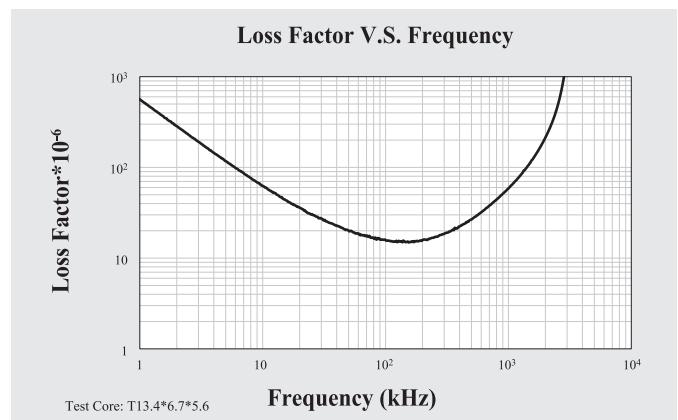

	Symbol	Unit	Measuring Conditions			EMI Filter Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$2000 \pm 25\%$
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10kHz	$< 0.25\text{mT}$	25°C	< 1.24
			100kHz		25°C	< 23
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	370
					100°C	285
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	240
					100°C	140
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	-
					100°C	-
Temperature Factor of Permeability	$\alpha_r$	$10^{-6}/^\circ\text{C}$	10kHz	$< 0.25\text{ mT}$	5 ~ 25°C	< 1.1
					25 ~ 55°C	< 5.8
Hysteresis Material Constant	$\eta_p$	$10^{-6}/\text{mT}$	10kHz	1.5-3.0mT	25°C	< 0.36
Curie Temperature	Tc	°C				$\geq 130$
Resistivity	$\rho$	Ωm				140
Density	d	g/cm³				4.95

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

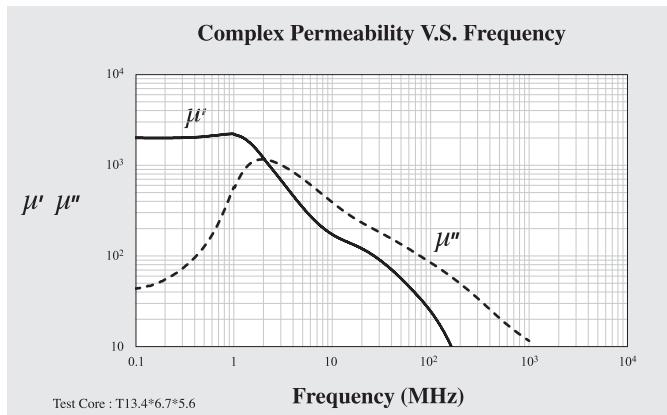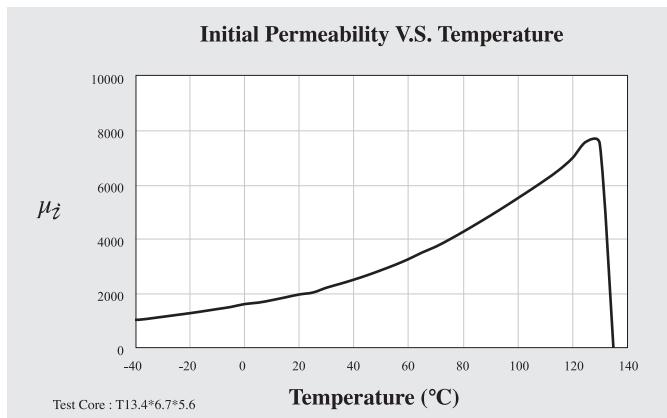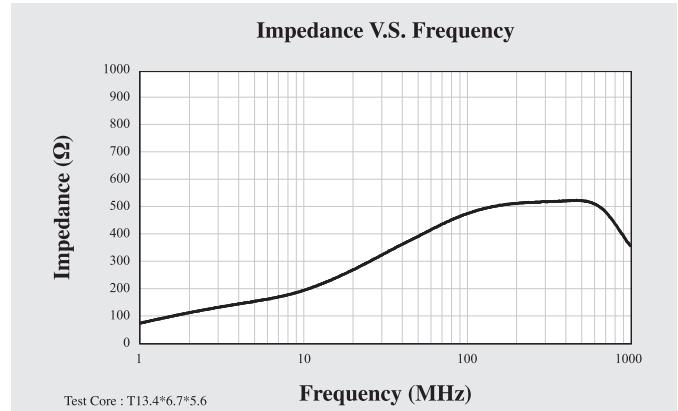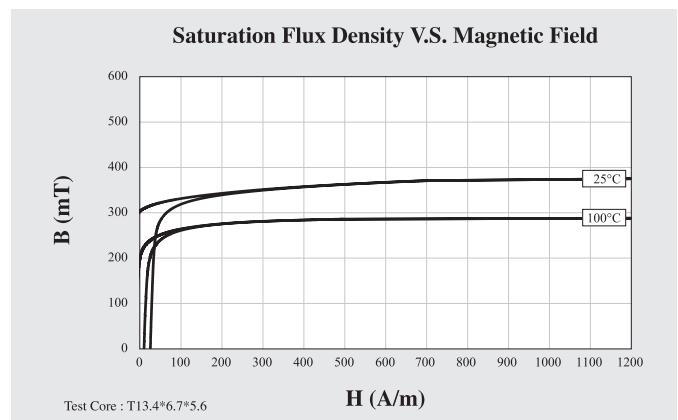

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material K081
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$800 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	400
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	280
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	21
Relative Loss Factor	$\tan\delta/\mu$	$10^{-6}$	100kHz	$< 0.25\text{mT}$	25°C	17
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}\text{°C}$	10kHz	$< 0.25\text{ mT}$	20 ~ 60°C	8
Curie Temperature	Tc	°C				$\geq 190$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

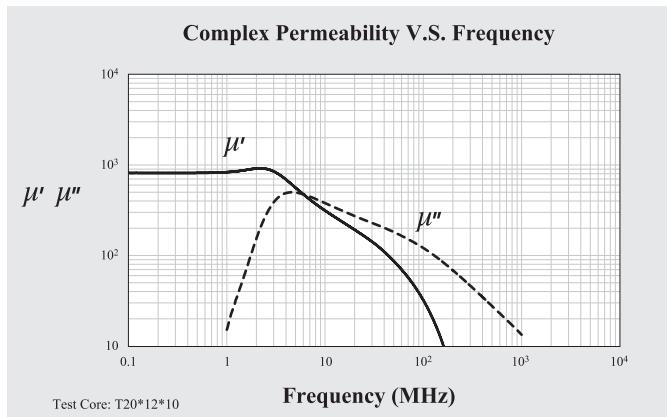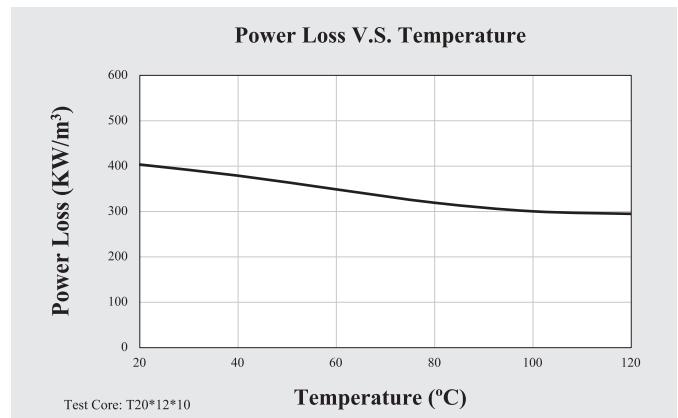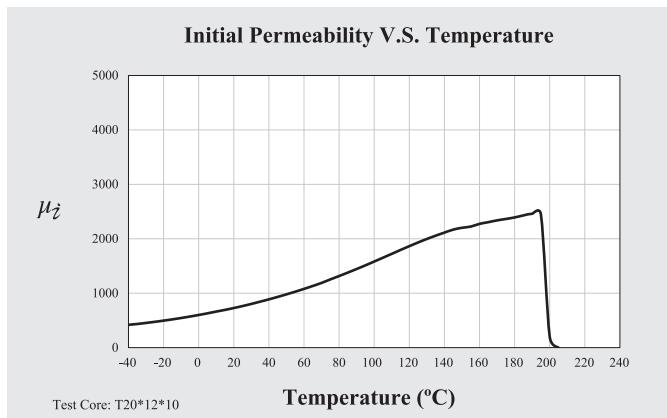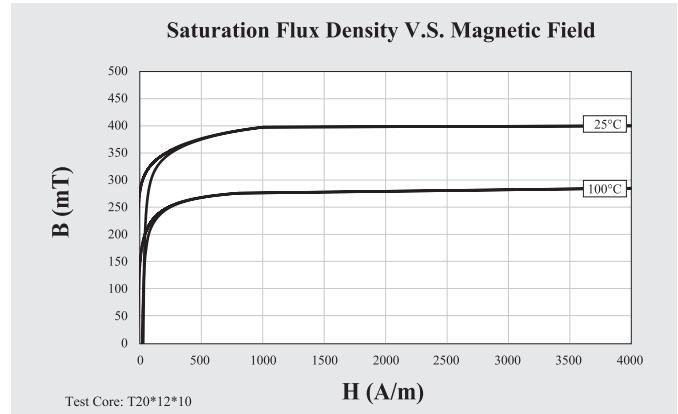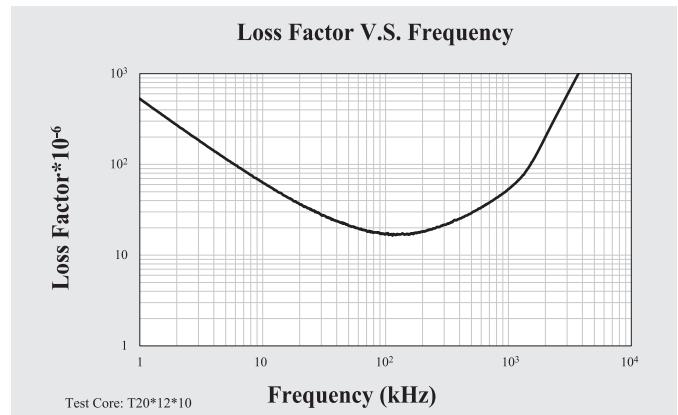

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material K10
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1000 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	355
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	250
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	19
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	11
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 60°C	8
Curie Temperature	Tc	°C				$\geq 160$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

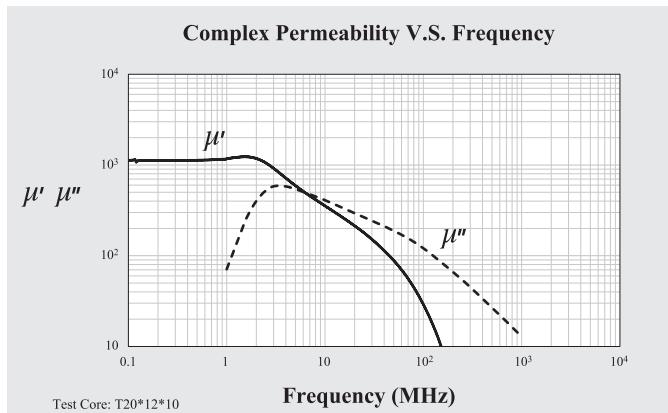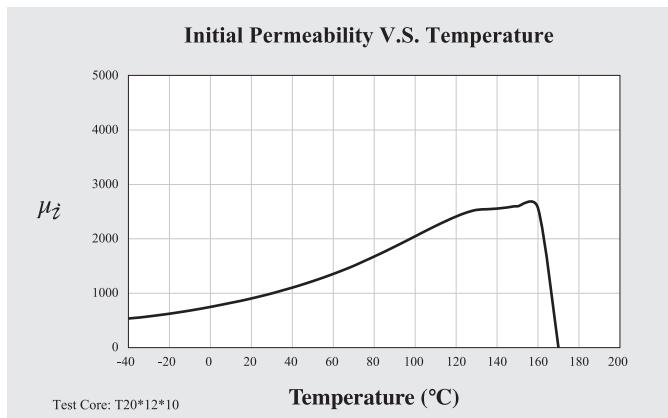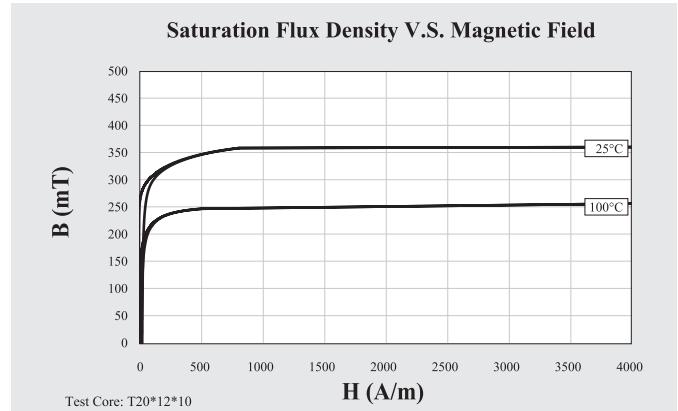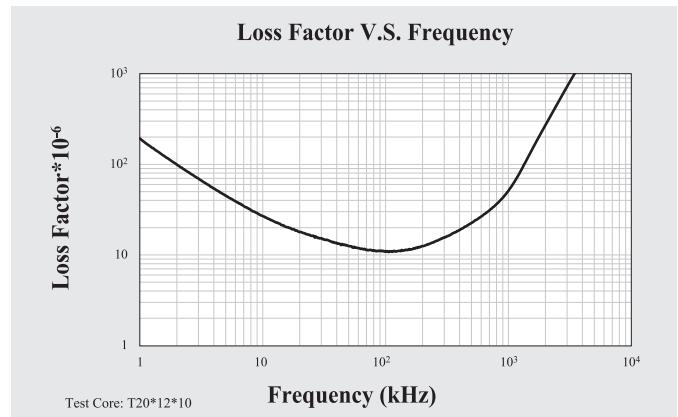

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1200 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	355
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	250
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	12
Relative Loss Factor	$\tan\delta/\mu$	$10^{-6}$	100kHz	< 0.25mT	25°C	13
Temperature Factor of Permeability	$\alpha_\mu$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 60°C	11
Curie Temperature	Tc	°C				$\geq 160$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

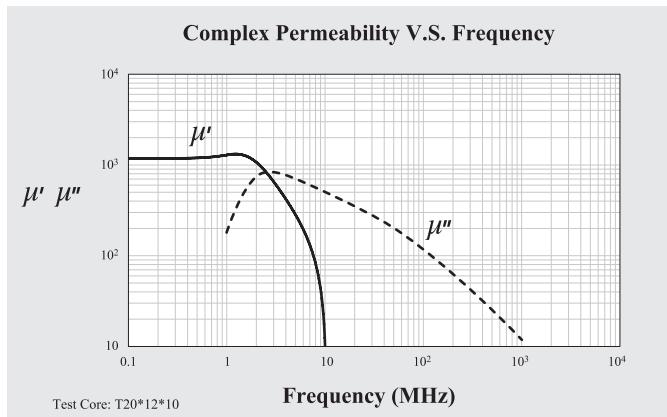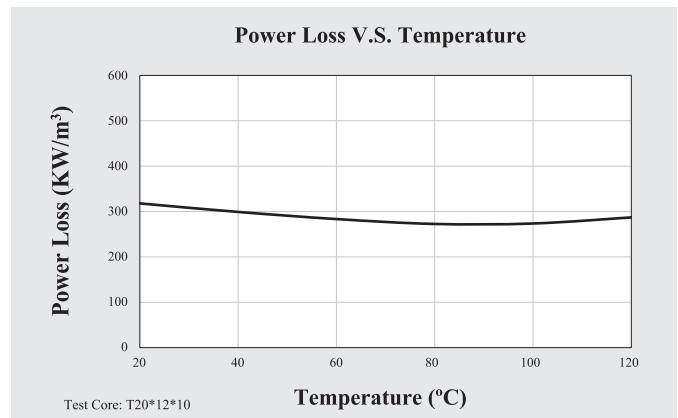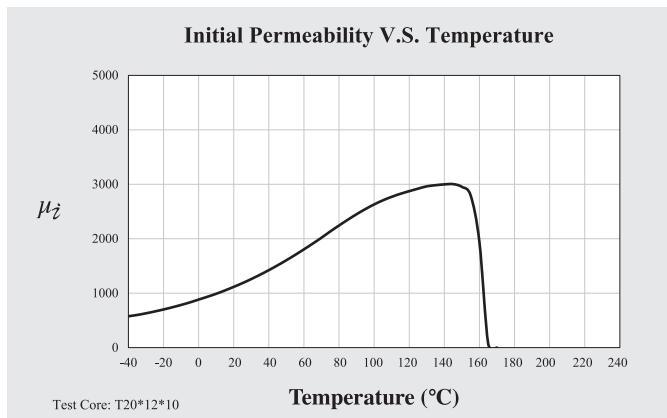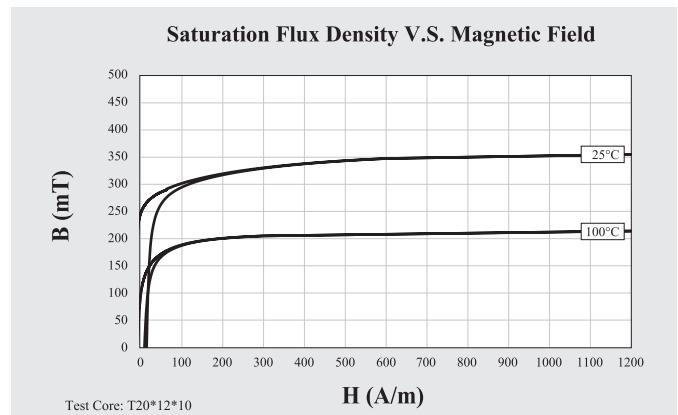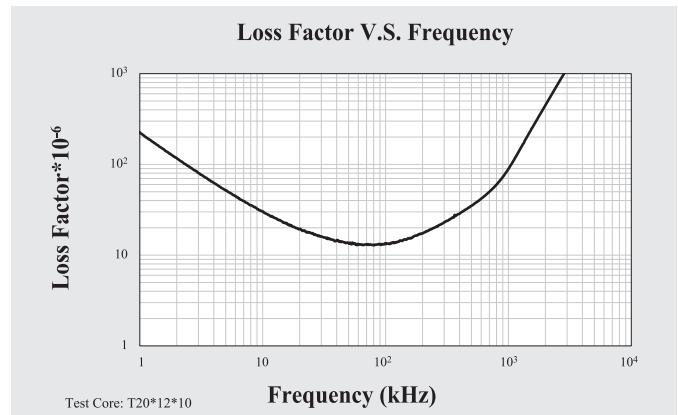

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material K13
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1300 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	340
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	190
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	16
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	15
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 60°C	8
Curie Temperature	Tc	°C				$\geq 150$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

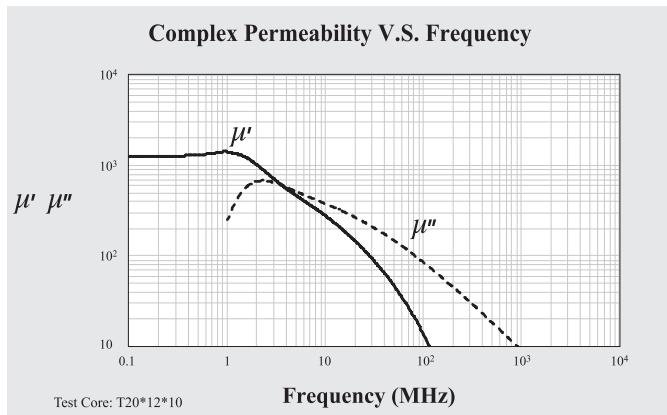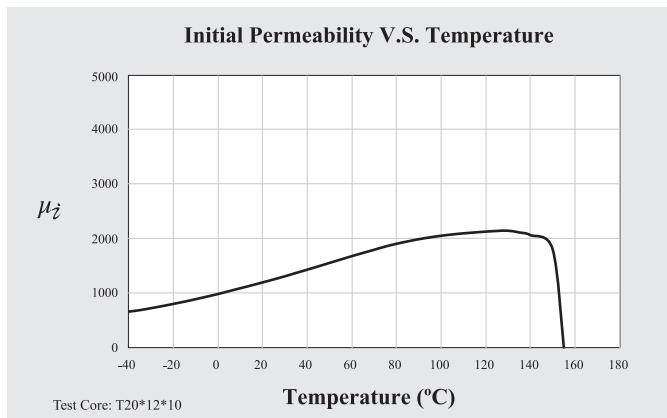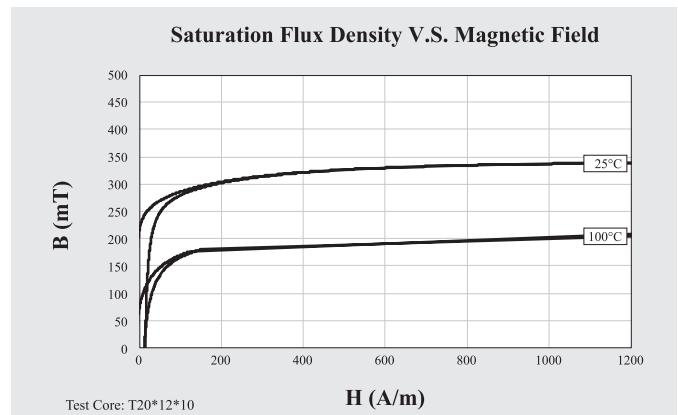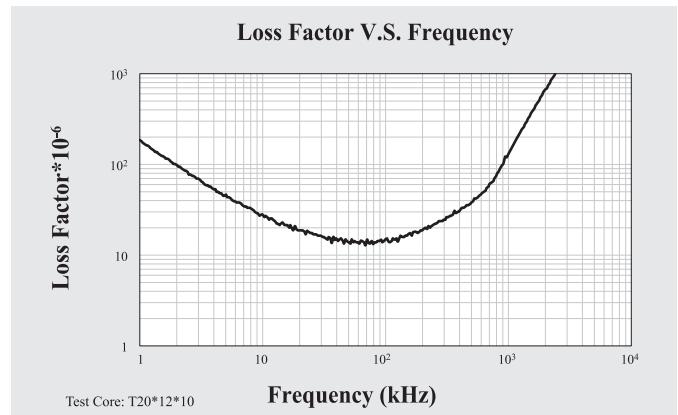

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material K15
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1500 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	330
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	200
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	11
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	11
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 60°C	6
Curie Temperature	Tc	°C				$\geq 130$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

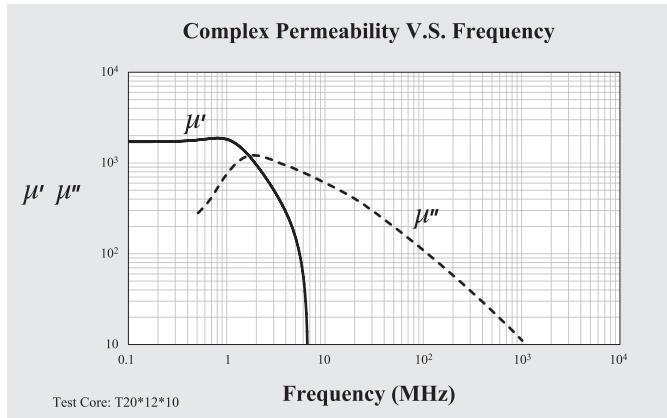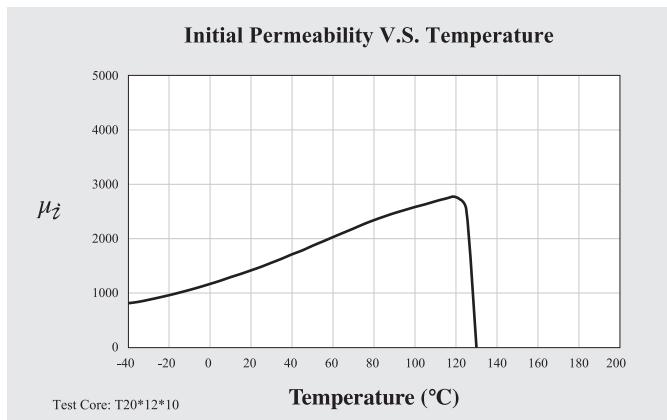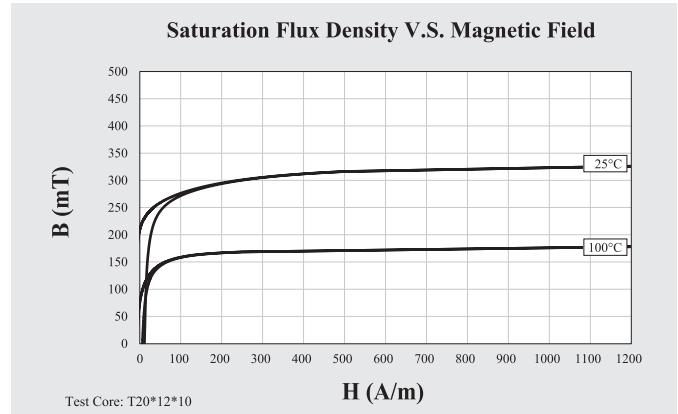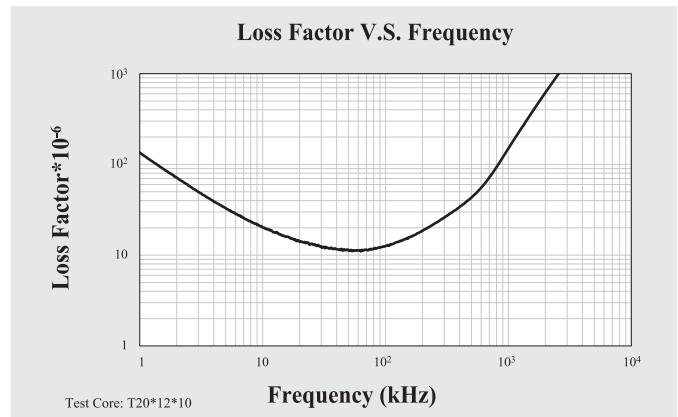

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material K151
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1500 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	290
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	150
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	20
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	10
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 60°C	4
Curie Temperature	Tc	°C				$\geq 110$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

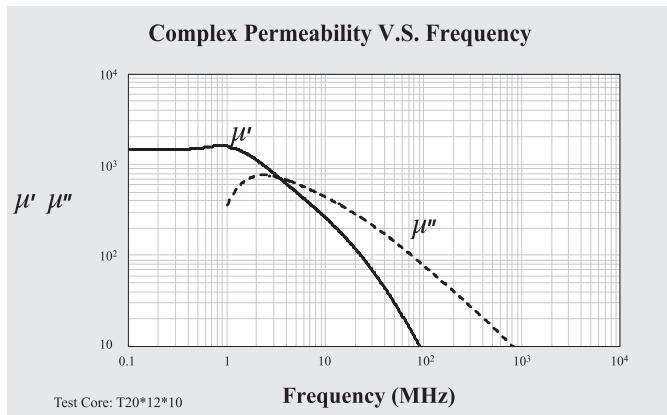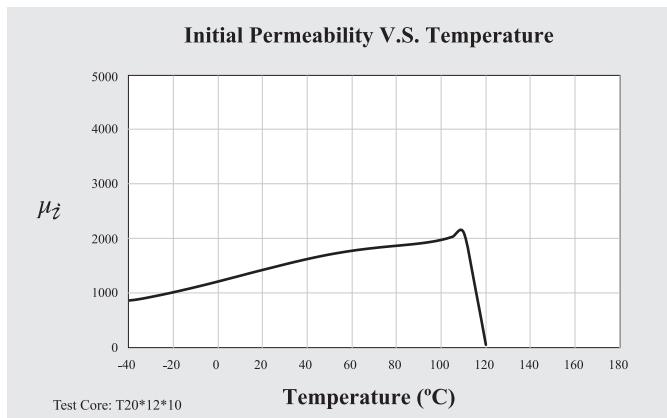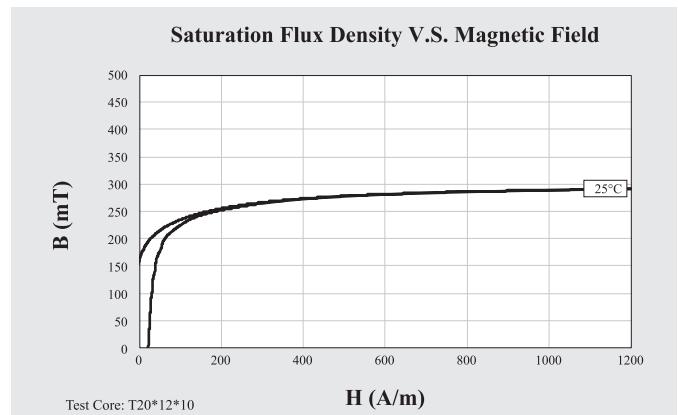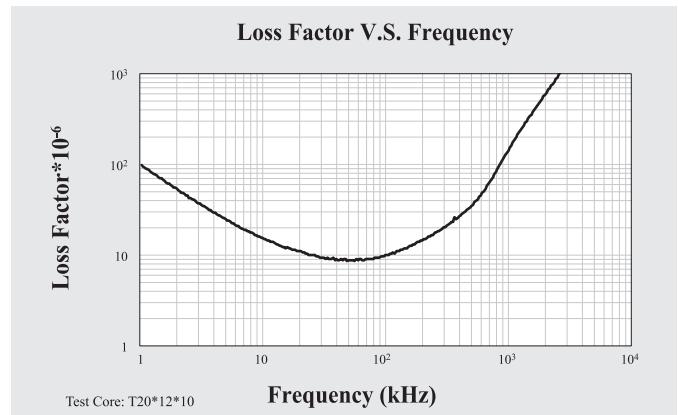

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material K20
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		≤ 10kHz	0.25mT	25°C	2000 ± 25%
Saturation Flux Density	Bs	mT	10kHz	H = 1200A/m	25°C	300
Remanence	Br	mT	10kHz	H = 1200A/m	25°C	150
Coercivity	Hc	A/m	10kHz	H = 1200A/m	25°C	11
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	11
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}/^{\circ}\text{C}$	10kHz	< 0.25 mT	20 ~ 60°C	3
Curie Temperature	Tc	°C				≥ 100
Resistivity	$\rho$	$\Omega\text{m}$				> $10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

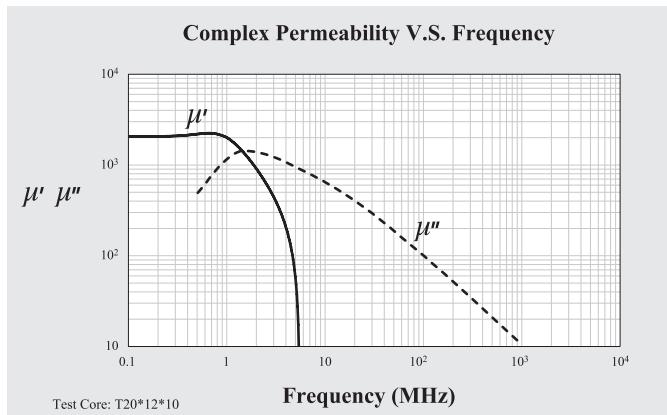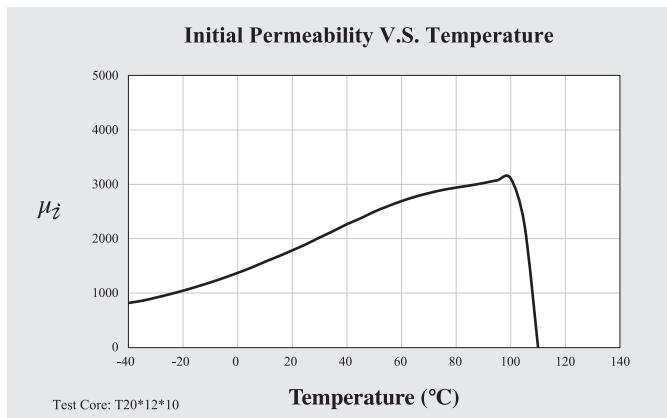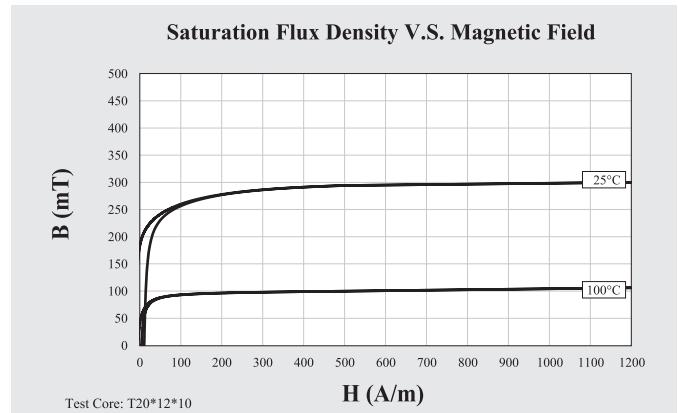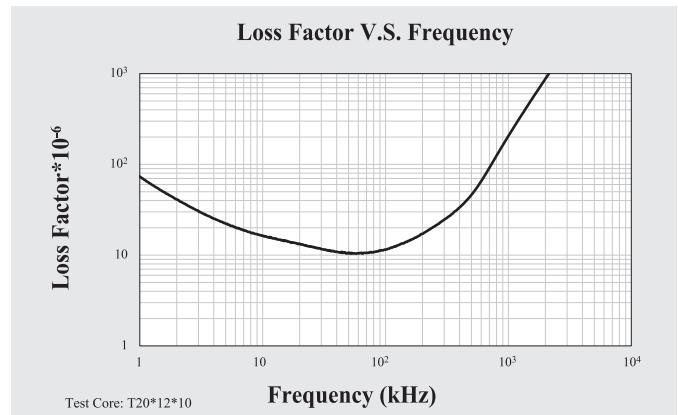

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$2500 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	275
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	170
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	14
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	15
Temperature Factor of Permeability	$\alpha_F$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 60°C	3
Curie Temperature	Tc	°C				$\geq 90$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

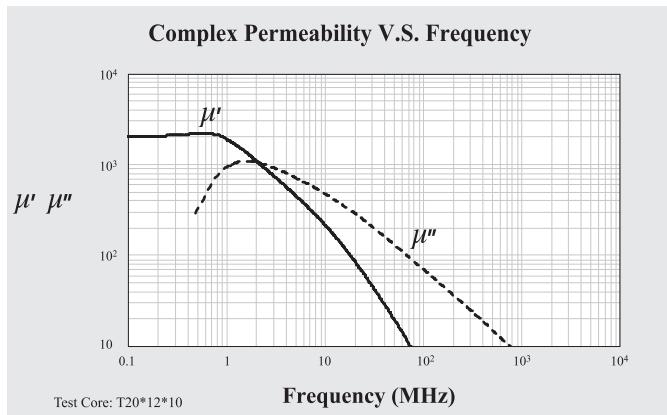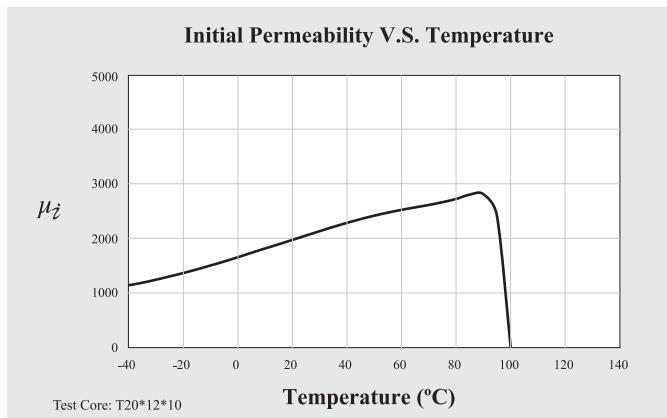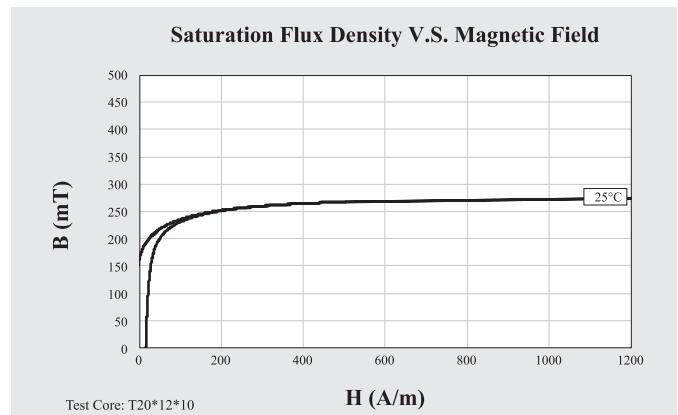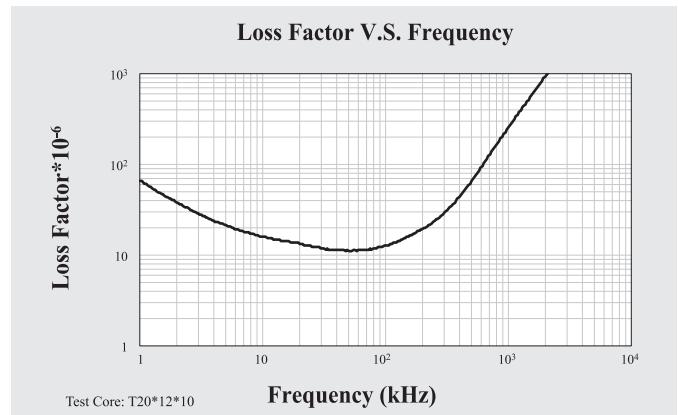

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$350 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	360
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	255
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	31
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz	< 0.25mT	25°C	30
Temperature Factor of Permeability	$\alpha_f$	$10^{-9}/^\circ\text{C}$	10kHz	< 0.25 mT	20 ~ 80°C	$\leq 50$
Curie Temperature	Tc	°C				$\geq 160$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.00

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

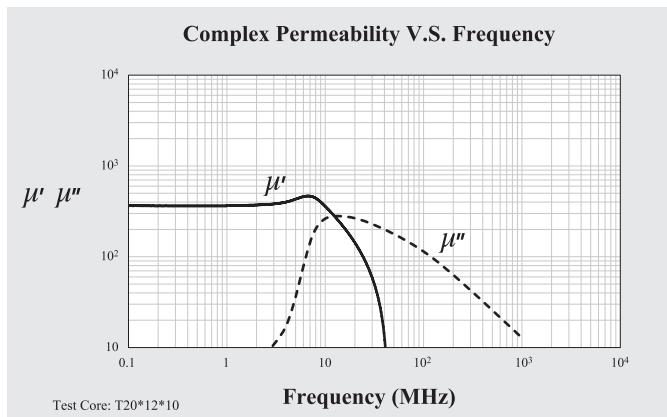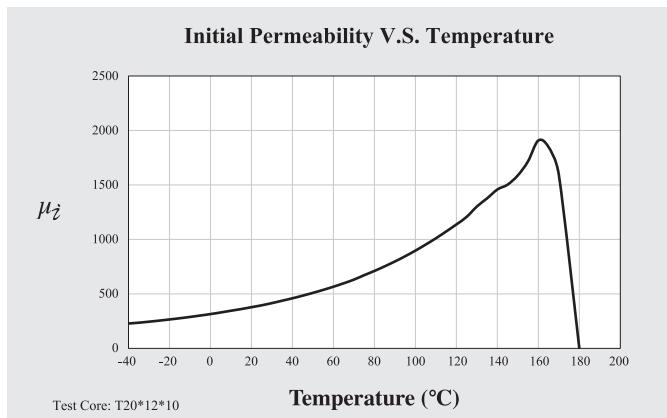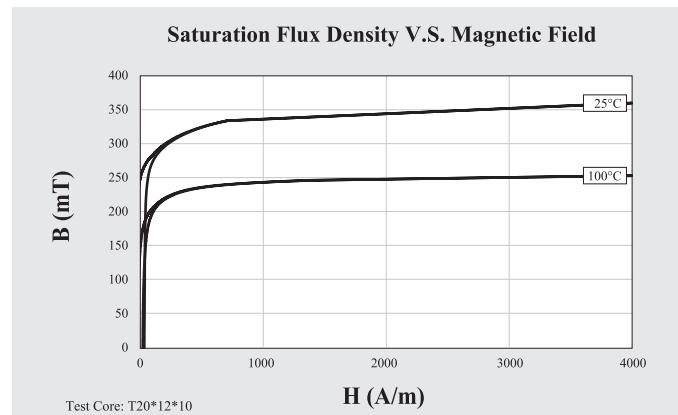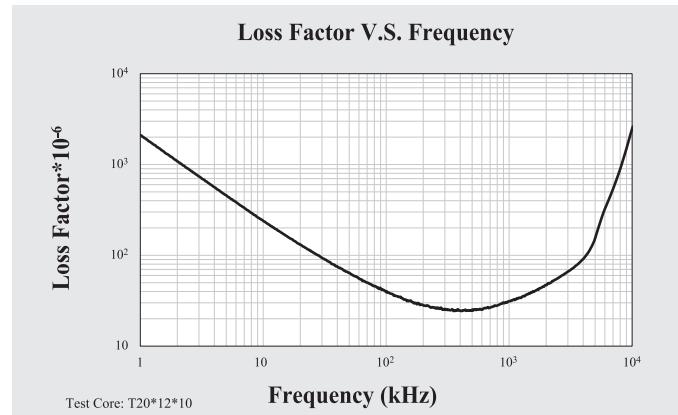

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material D25
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		≤ 10kHz	0.25mT	25°C	500 ± 25%
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	390
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	260
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	58
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz	< 0.25mT	25°C	248
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}/^{\circ}\text{C}$	10kHz	< 0.25 mT	20 ~ 80°C	≤ 35
Curie Temperature	Tc	°C				≥ 180
Resistivity	$\rho$	Ωm				> $10^6$
Density	d	g/cm <sup>3</sup>				5.00

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

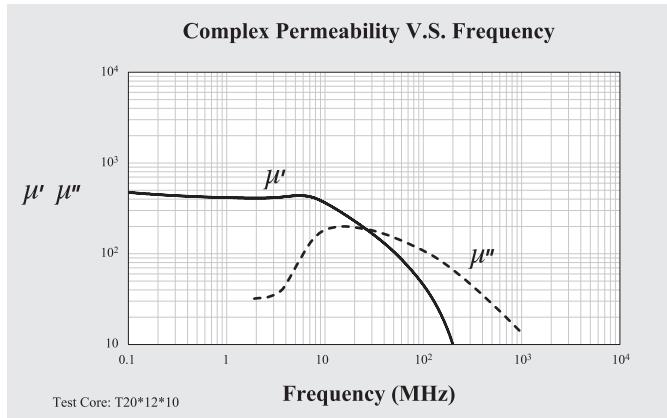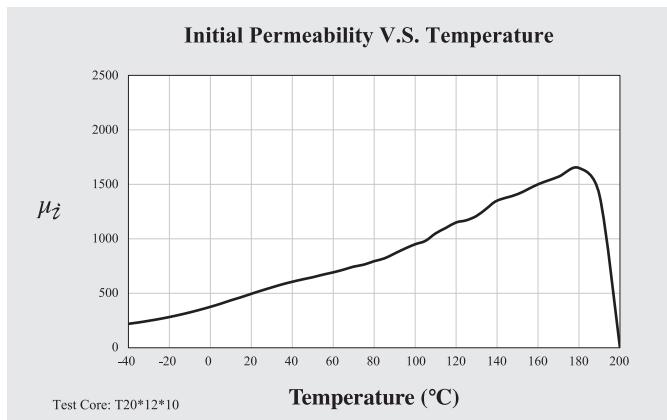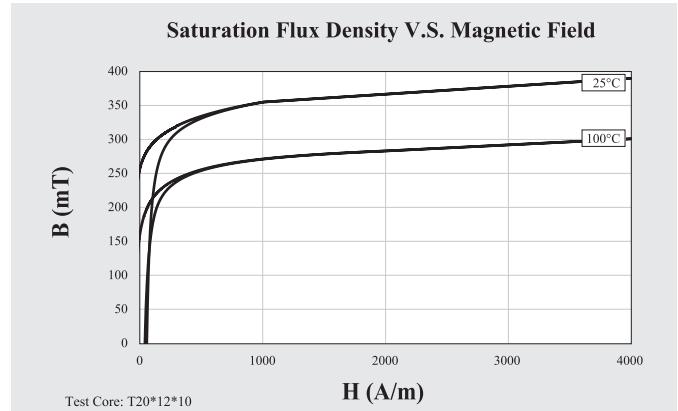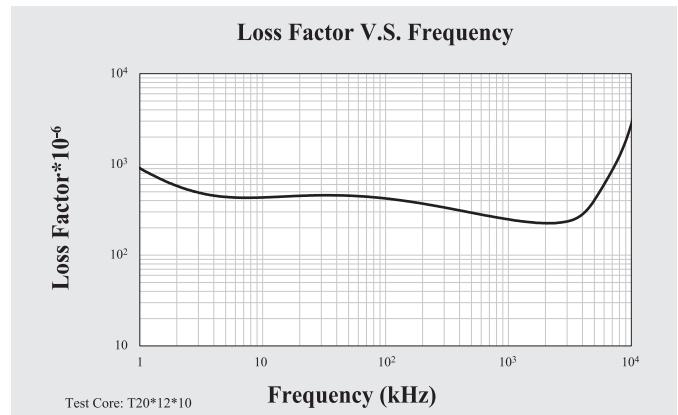

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material D27
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$700 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	365
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	235
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	20
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	< 0.25mT	25°C	20
Temperature Factor of Permeability	$\alpha_p$	$10^{-9}/^\circ\text{C}$	10kHz	< 0.25 mT	20 ~ 80°C	$\leq 7$
Curie Temperature	Tc	°C				$\geq 150$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				4.80

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

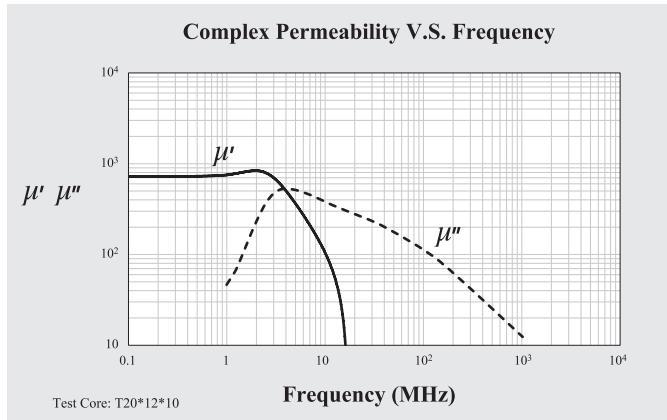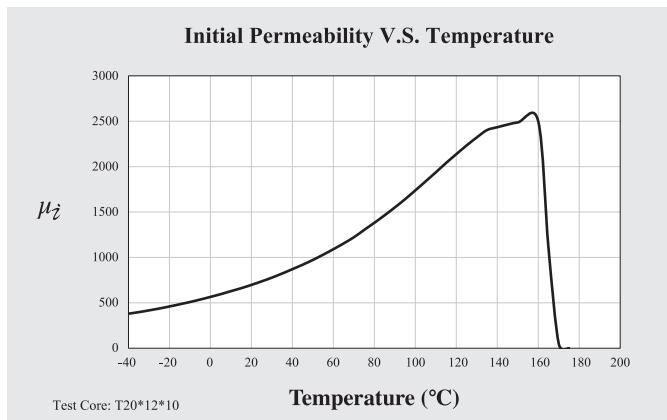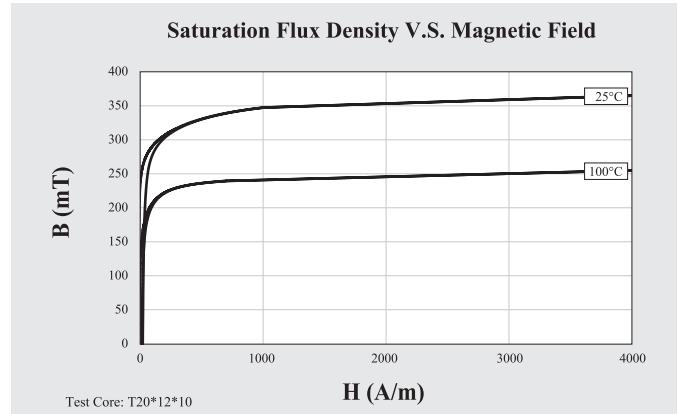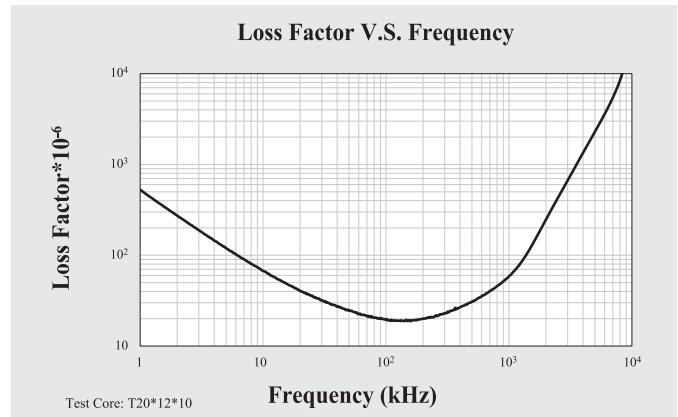

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$800 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	365
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	180
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	26
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	< 0.25mT	25°C	20
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 80°C	$\leq 5$
Curie Temperature	Tc	°C			-50 ~ 80°C	$\geq 150$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.00

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

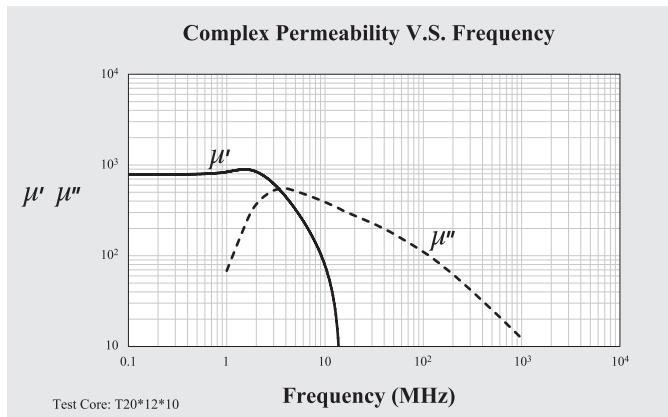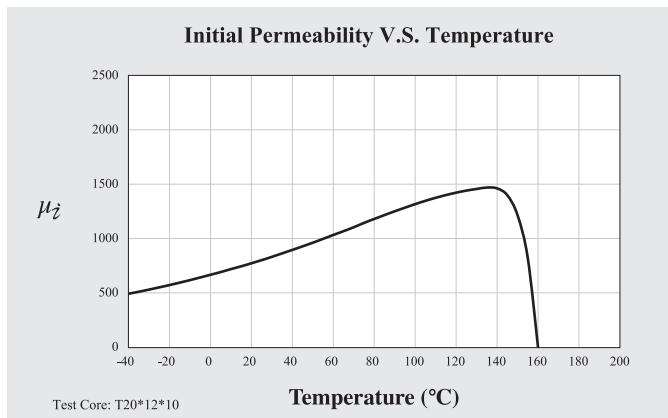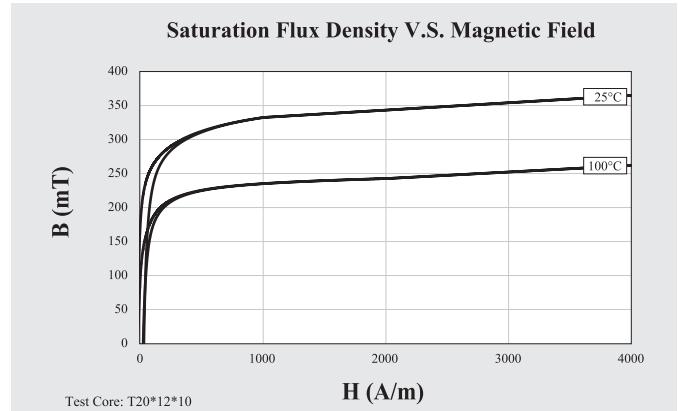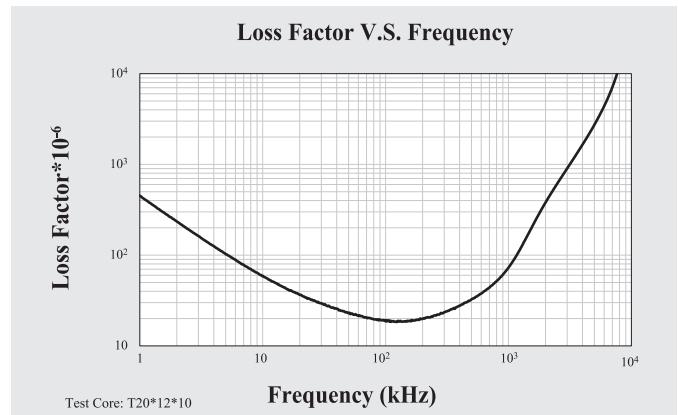

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material D30
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1000 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	340
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	115
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	28
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	< 0.25mT	25°C	35
Temperature Factor of Permeability	$\alpha_f$	$10^{-9}/^\circ\text{C}$	10kHz	< 0.25 mT	20 ~ 80°C	$\leq 6$
Curie Temperature	Tc	°C				$\geq 140$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.00

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

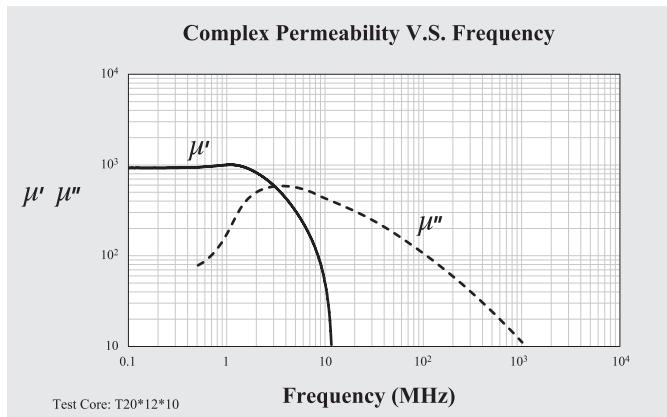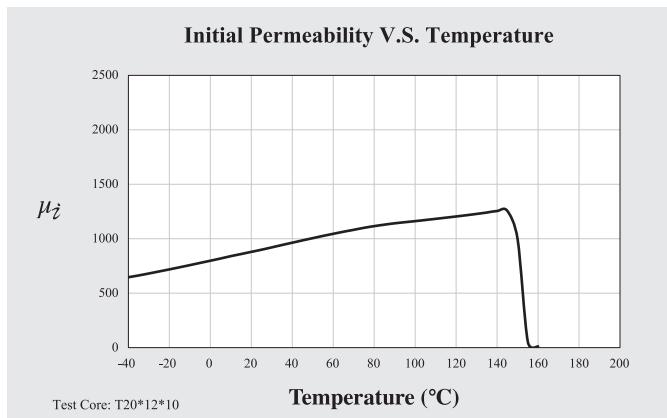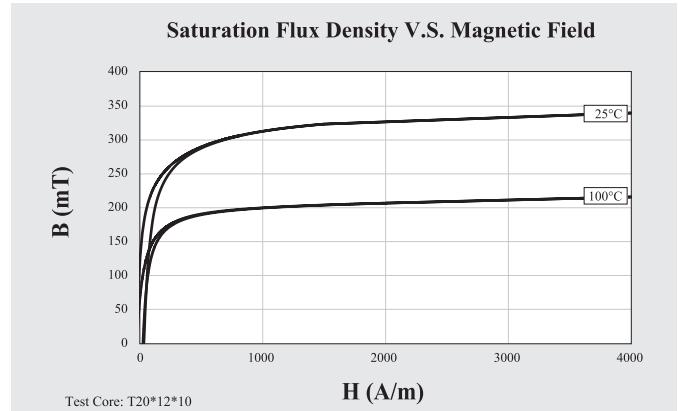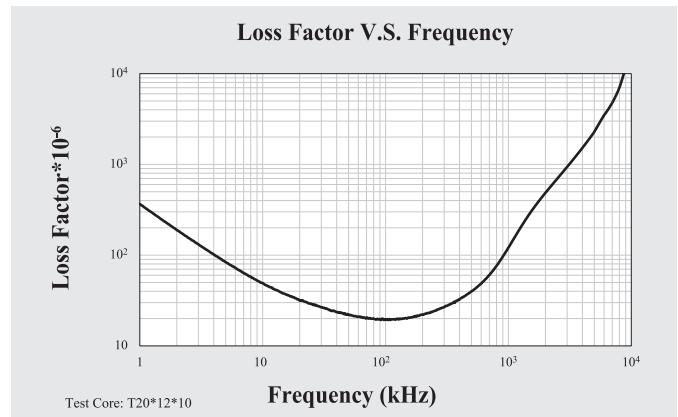

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1100 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	305
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	140
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	22
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	< 0.25mT	25°C	20
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 80°C	$\leq 2$
Curie Temperature	Tc	°C				$\geq 120$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.00

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

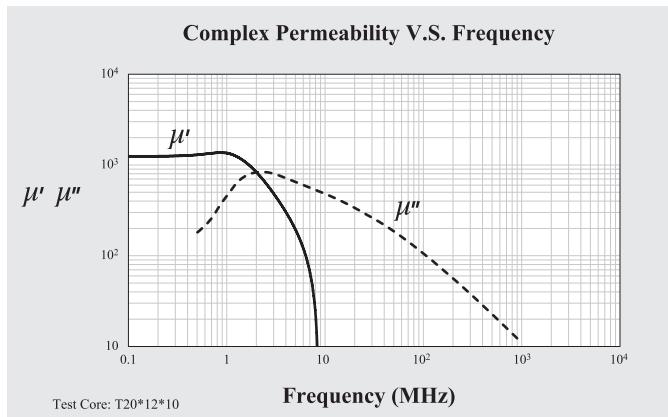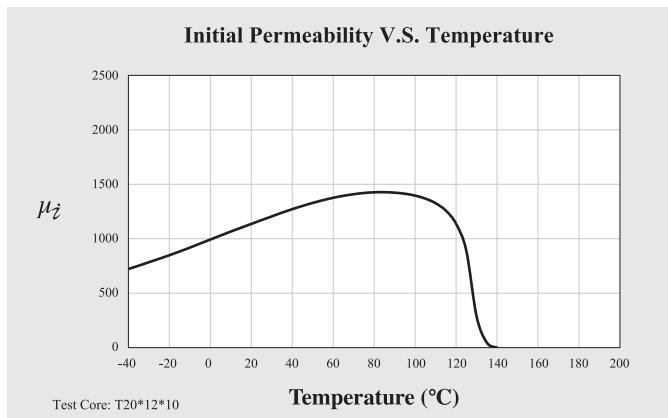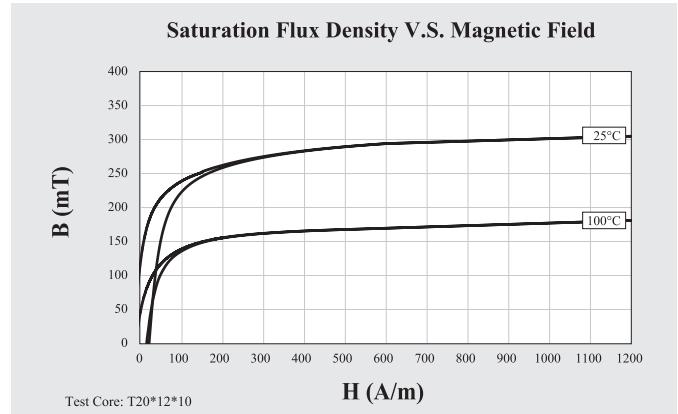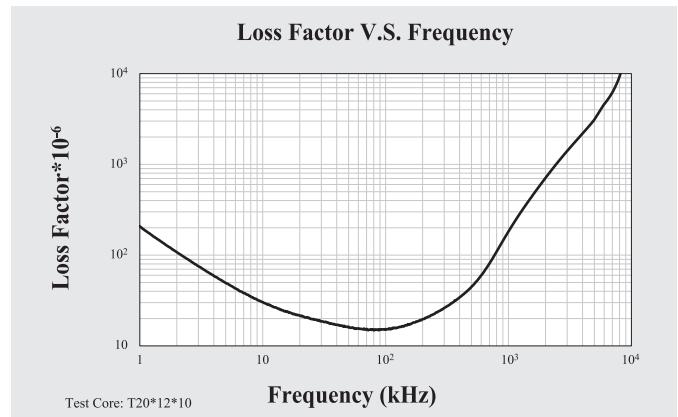

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material D37
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1500 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	290
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	150
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	20
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	< 0.25mT	25°C	10
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 80°C	$\leq 4$
Curie Temperature	Tc	°C				$\geq 110$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.00

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

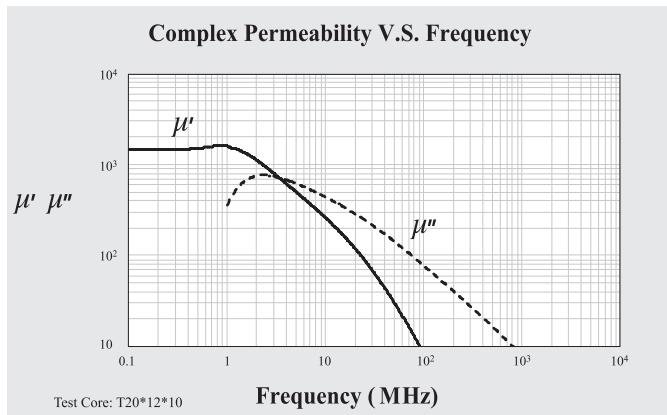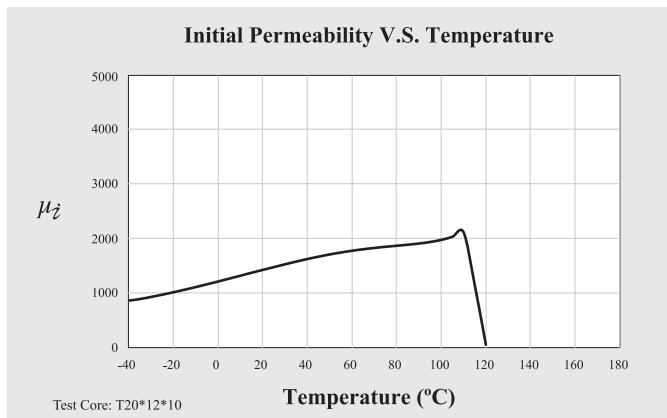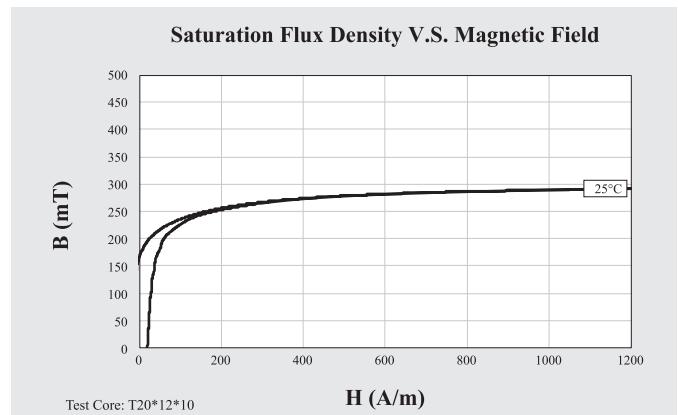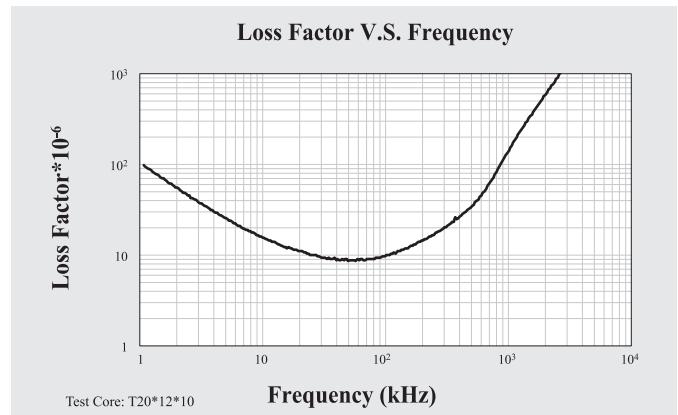

	Symbol	Unit	Measuring Conditions			Automotive EMI-Suppression Material D40
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$2000 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 1200\text{A/m}$	25°C	275
Remanence	Br	mT	10kHz	$H = 1200\text{A/m}$	25°C	115
Coercivity	Hc	A/m	10kHz	$H = 1200\text{A/m}$	25°C	8
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	< 0.25mT	25°C	18
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 80°C	$\leq 20$
Curie Temperature	Tc	°C				$\geq 90$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.00

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

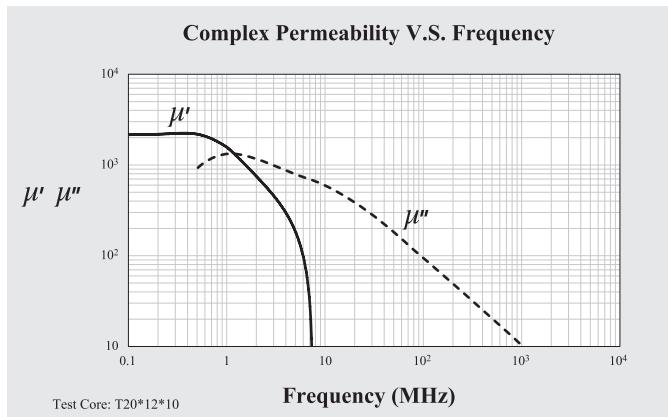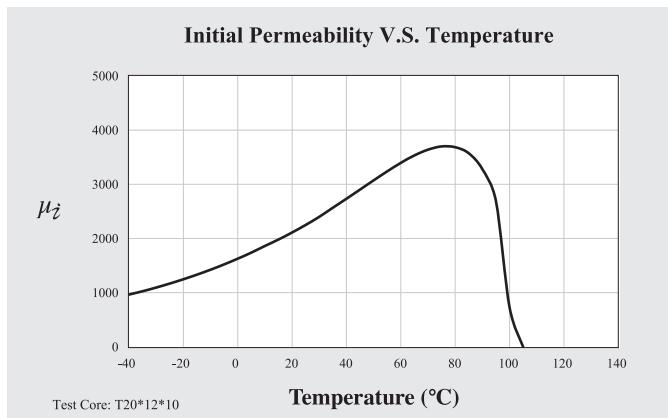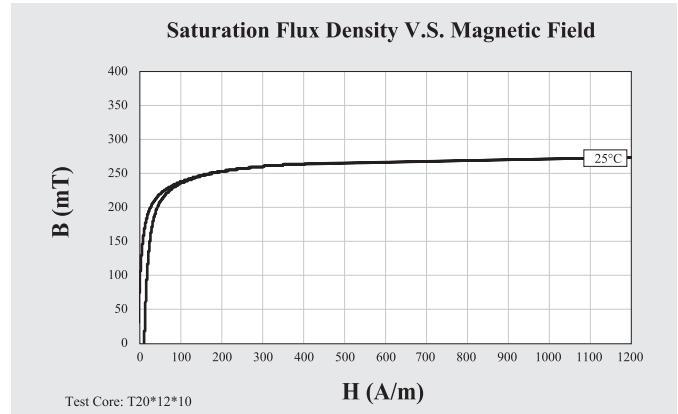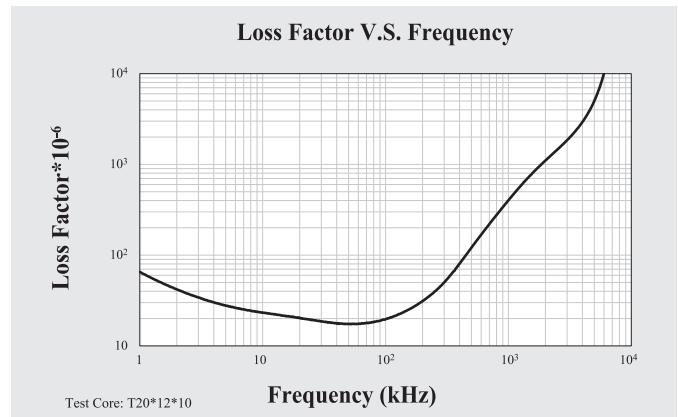

	Symbol	Unit	Measuring Conditions			Conventional High Bs Material
			Freq.	Flux den.	Temp.	A30
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$300 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	435
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	300
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	68
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz	< 0.25mT	25°C	40
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{^{\circ}C}$	10kHz	< 0.25 mT	20 ~ 80°C	$\leq 25$
Curie Temperature	Tc	°C				$\geq 250$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.00

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

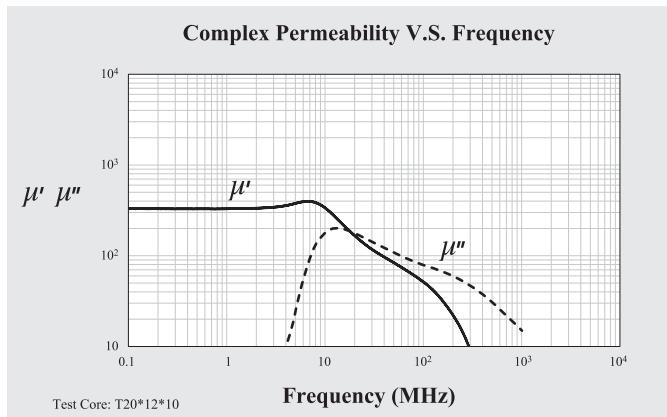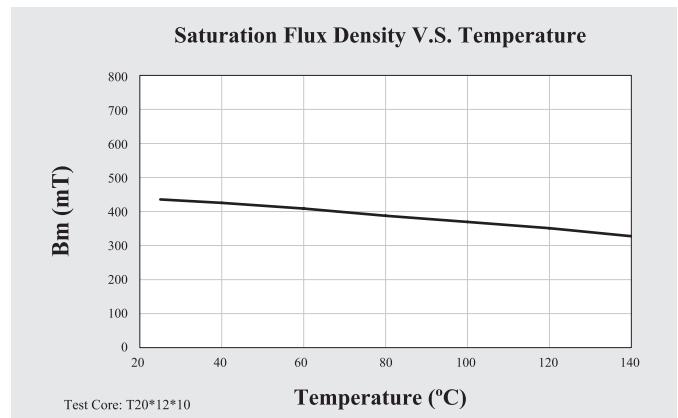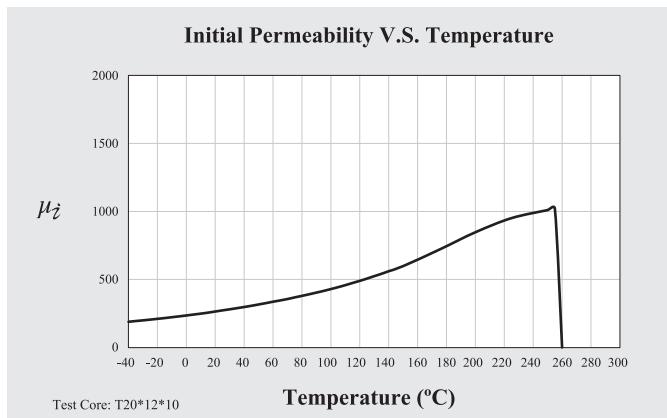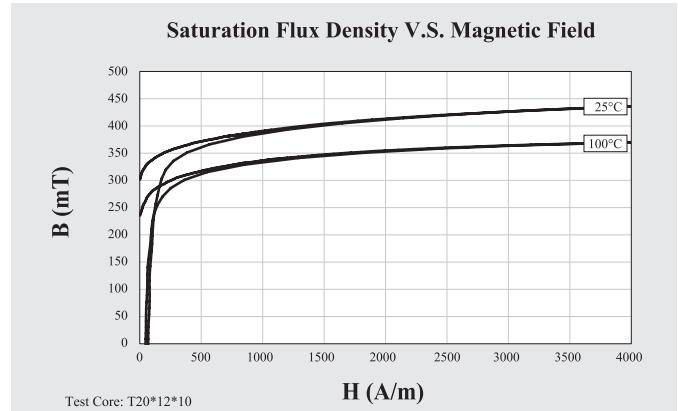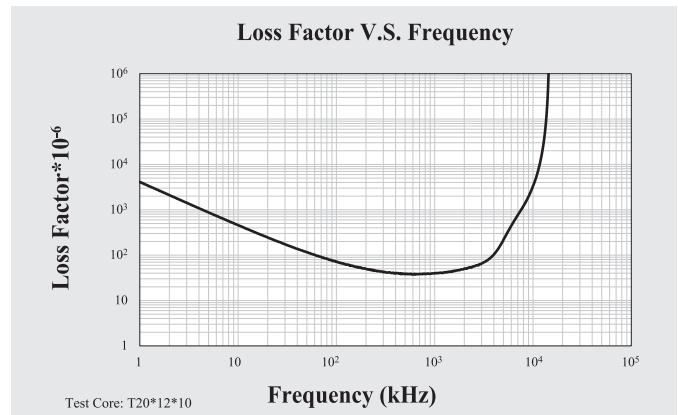

	Symbol	Unit	Measuring Conditions			Conventional High Bs Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$300 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	435
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	180
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	52
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.4MHz	$< 0.25\text{mT}$	25°C	50
Temperature Factor of Permeability	$\alpha_p$	$10^{-9}\text{^{\circ}C}$	10kHz	$< 0.25\text{ mT}$	20 ~ 80°C	$\leq 25$
Curie Temperature	Tc	°C				$\geq 250$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.00

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

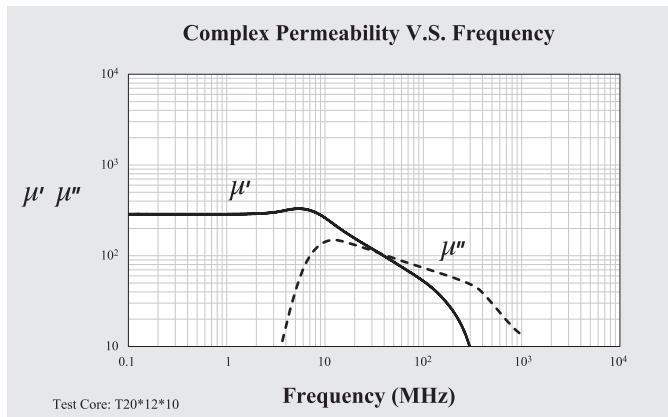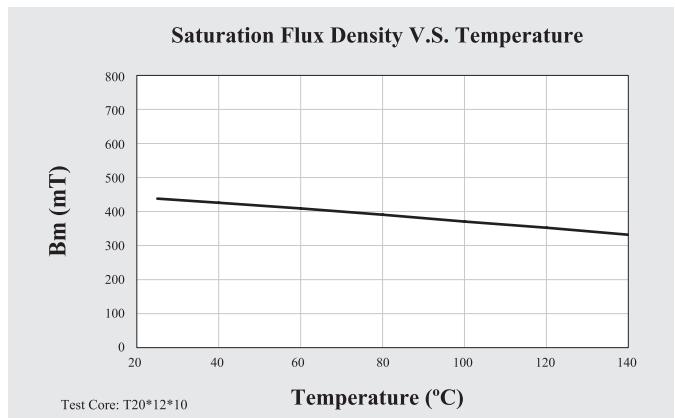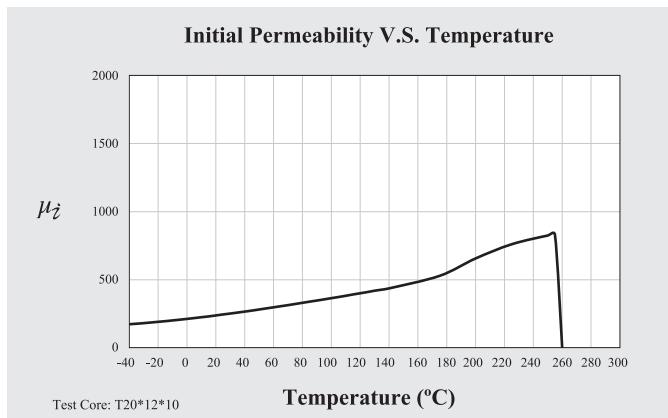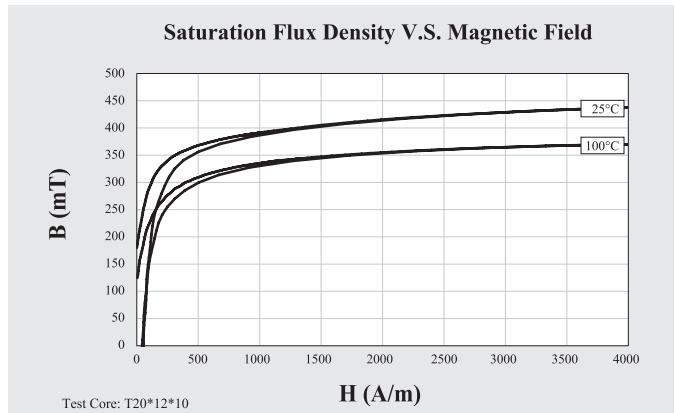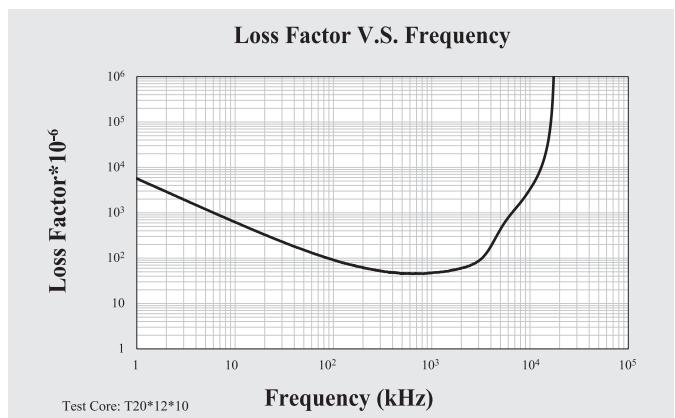

	Symbol	Unit	Measuring Conditions			Conventional High Bs Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$400 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	430
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	320
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	62
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz	< 0.25mT	25°C	35
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{^{\circ}C}$	10kHz	< 0.25 mT	20 ~ 80°C	$\leq 20$
Curie Temperature	Tc	°C				$\geq 250$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.00

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

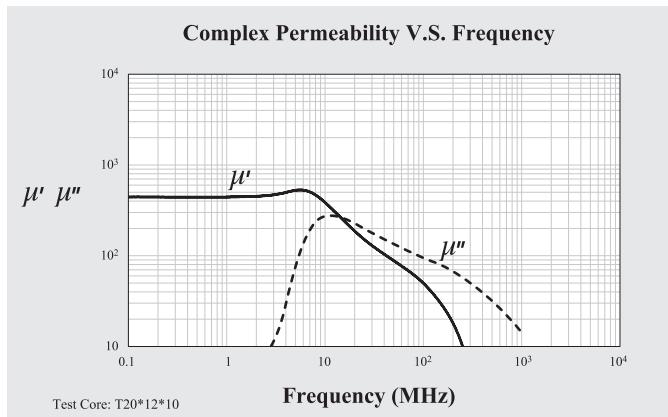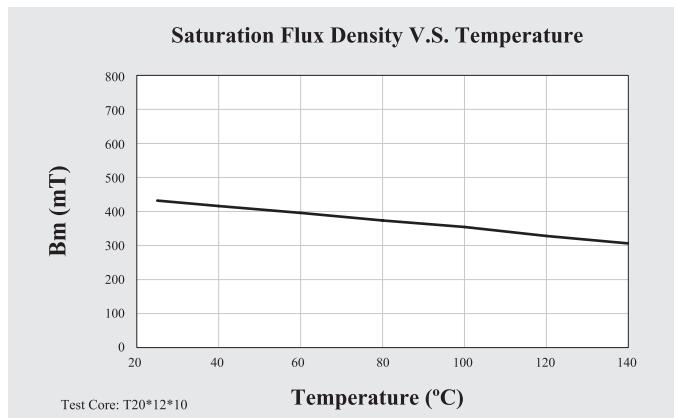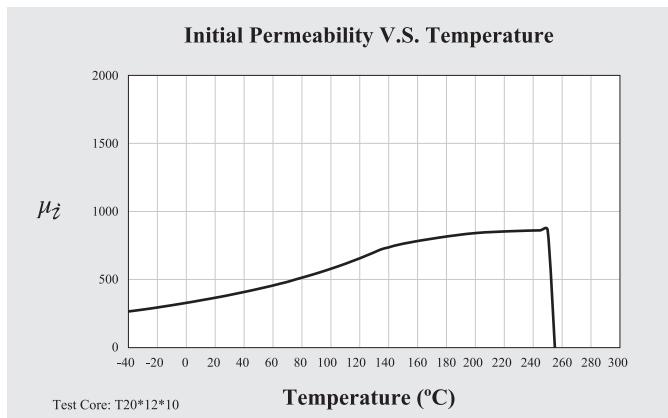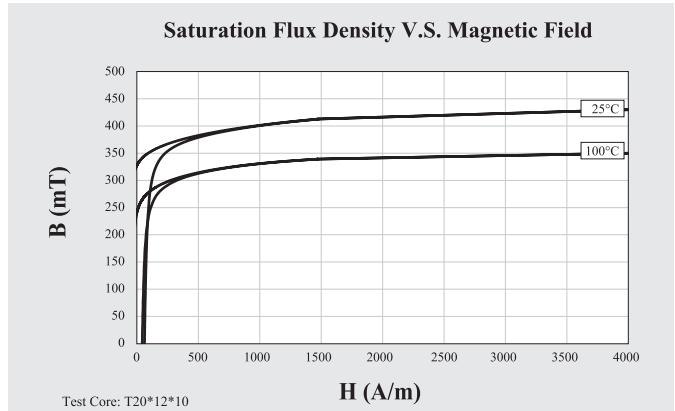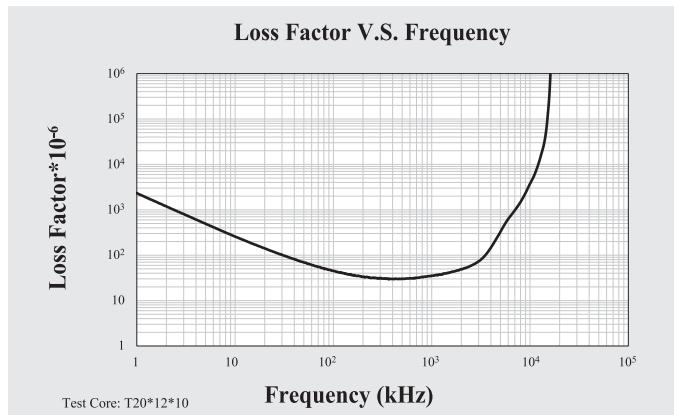

	Symbol	Unit	Measuring Conditions			Conventional High Bs Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$500 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	330
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	125
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	56
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	$< 0.25\text{mT}$	25°C	30
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	$< 0.25\text{ mT}$	20 ~ 80°C	$1 \sim 5$
Curie Temperature	Tc	°C				$\geq 150$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.00

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

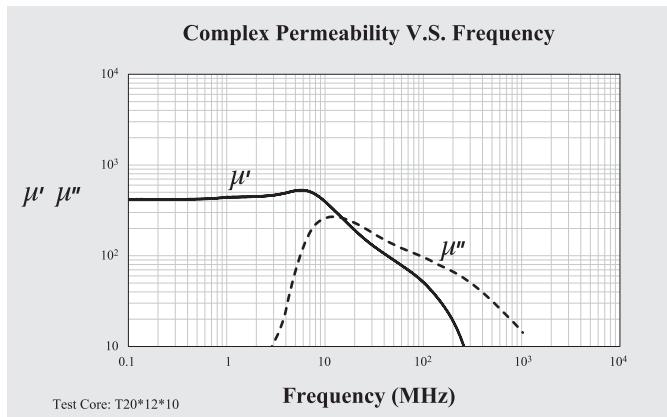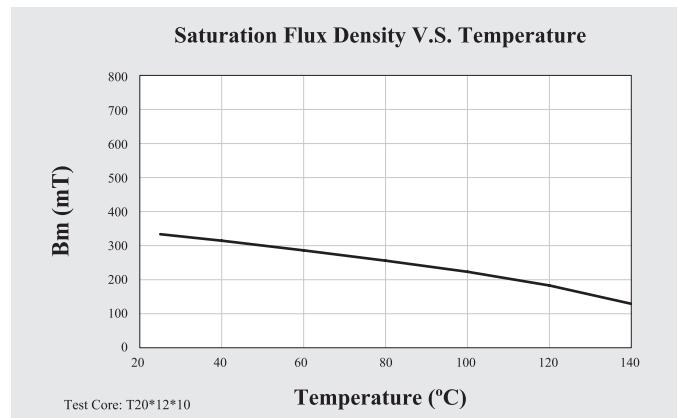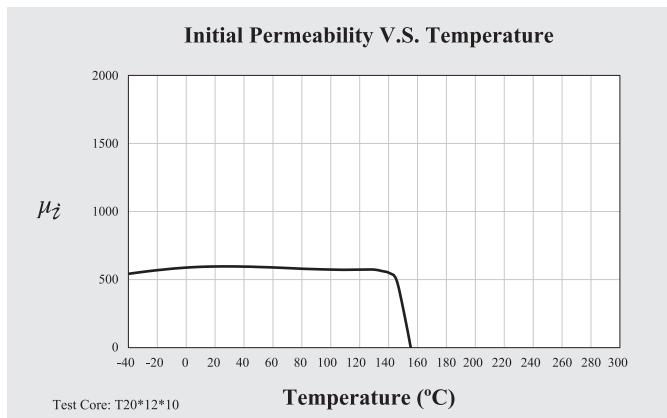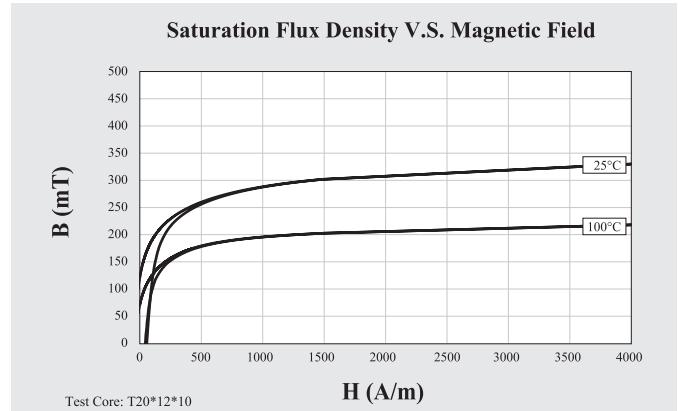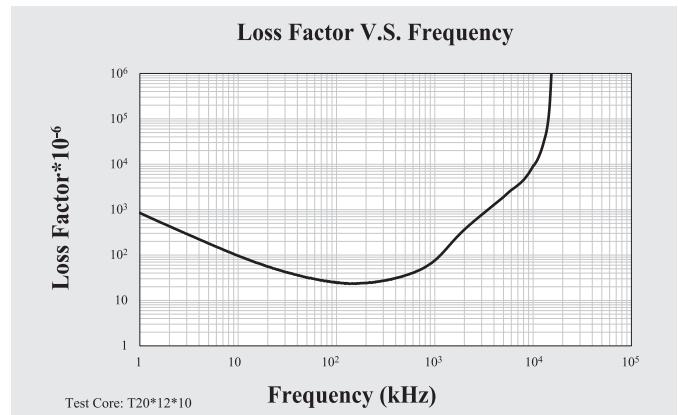

	Symbol	Unit	Measuring Conditions		Automotive High Bs Material	
			Freq.	Flux den.	Temp.	B30
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$300 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	470
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	250
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	80
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	$< 0.25\text{mT}$	25°C	60
Temperature Factor of	$\alpha_f$	$10^{-9}\text{^{\circ}C}$	10kHz	$< 0.25\text{ mT}$	20 ~ 60°C	16
Permeability						
Curie Temperature	Tc	°C				$\geq 300$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.20

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

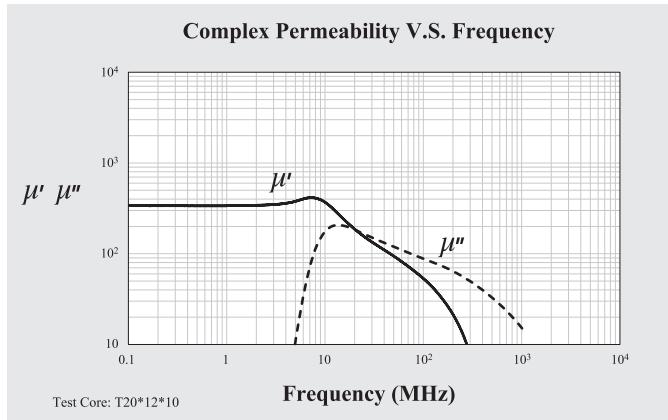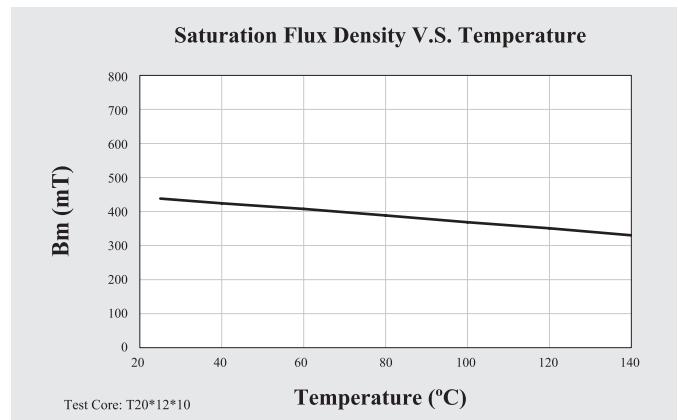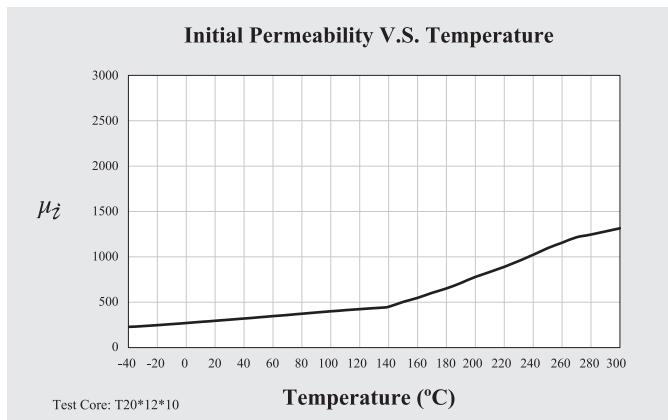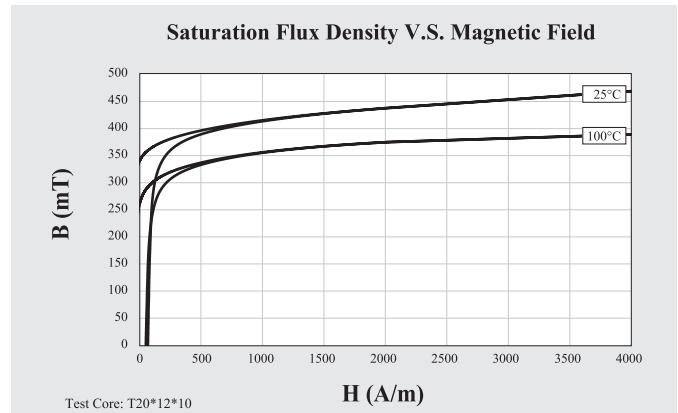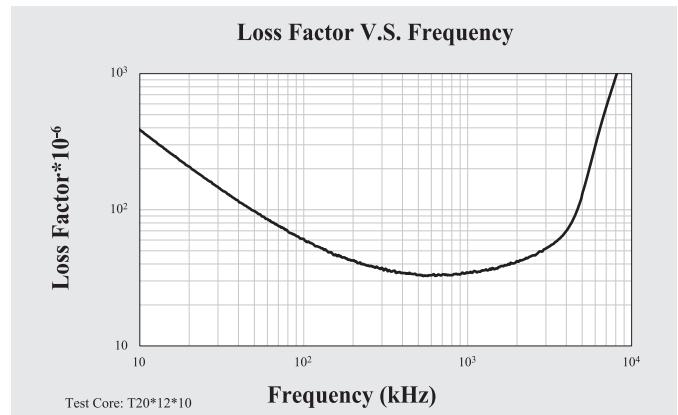

	Symbol	Unit	Measuring Conditions			Automotive High Bs Material B40
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$400 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	430
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	300
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	45
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	40
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 60°C	10
Curie Temperature	Tc	°C				$\geq 240$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.20

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

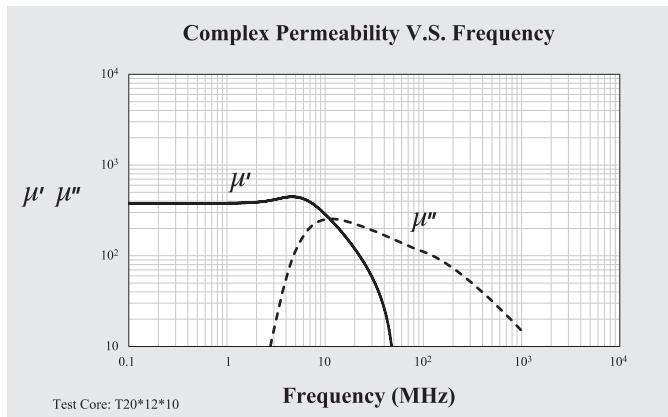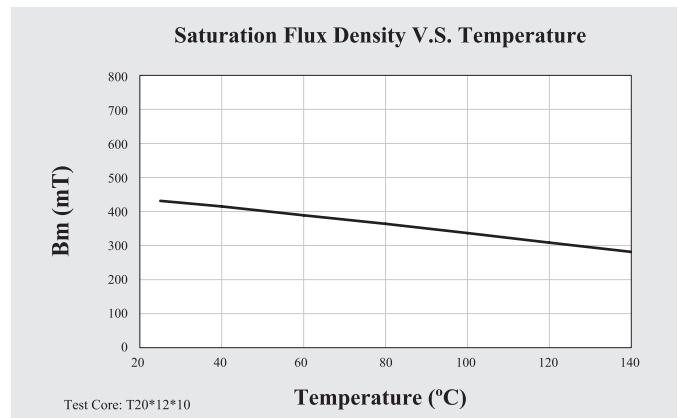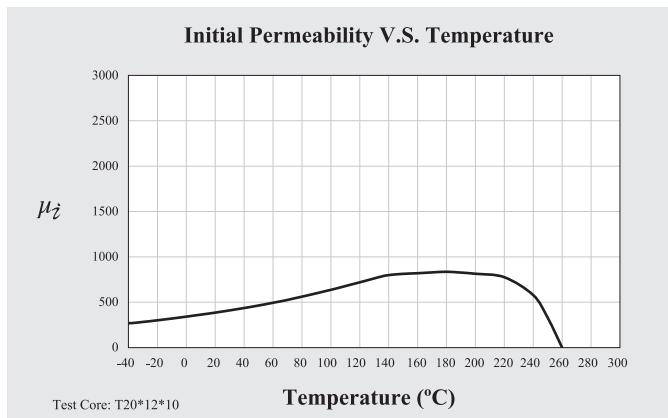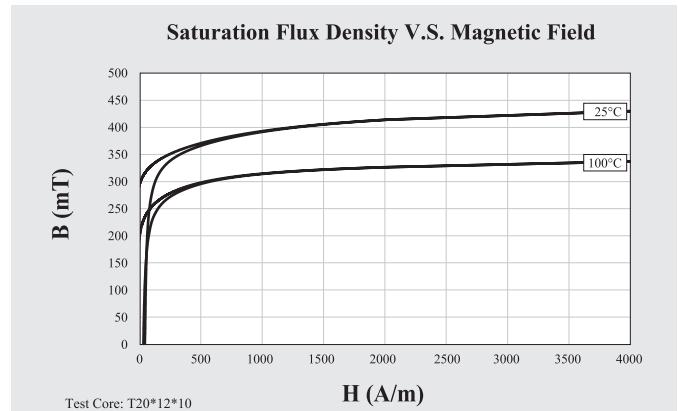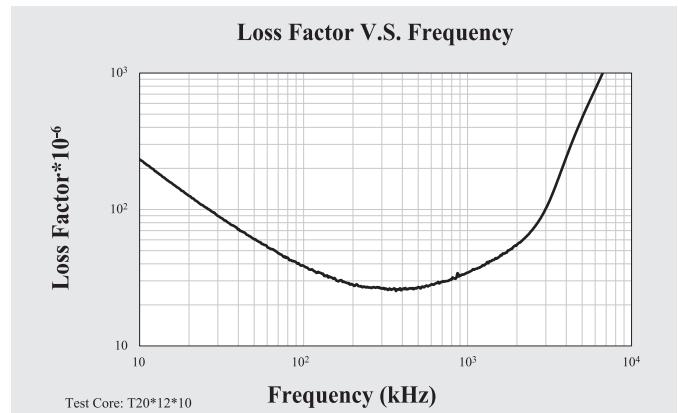

	Symbol	Unit	Measuring Conditions			Automotive High Bs Material
			Freq.	Flux den.	Temp.	B45
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$450 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	450
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	270
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	49
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	40
Temperature Factor of Permeability	$\alpha_F$	$10^{-9}\text{°C}$	10kHz	< 0.25 mT	20 ~ 60°C	15
Curie Temperature	Tc	°C				$\geq 240$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.20

Note: Material characteristics are typical for a toroid core.






Product specification will differ from these data due to the influence of geometry and size.

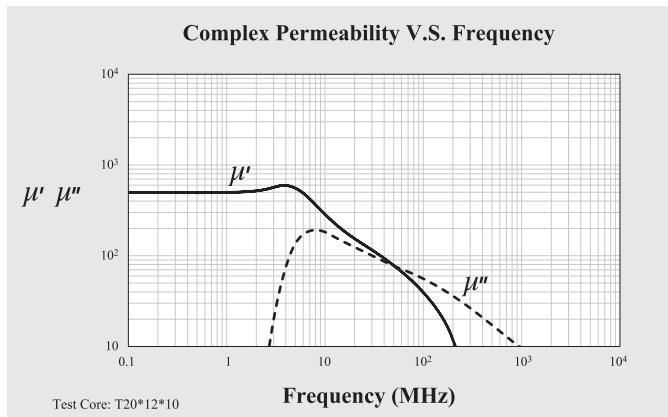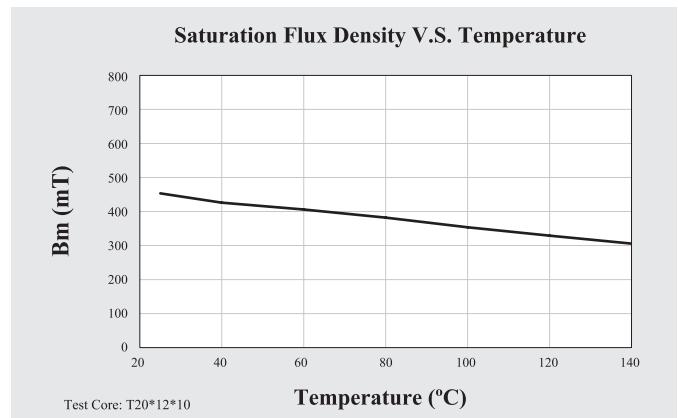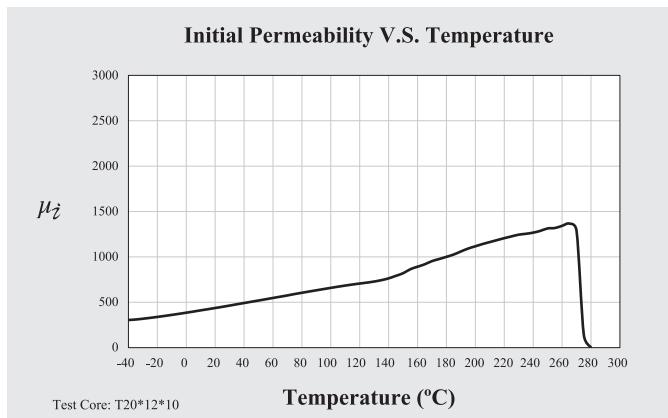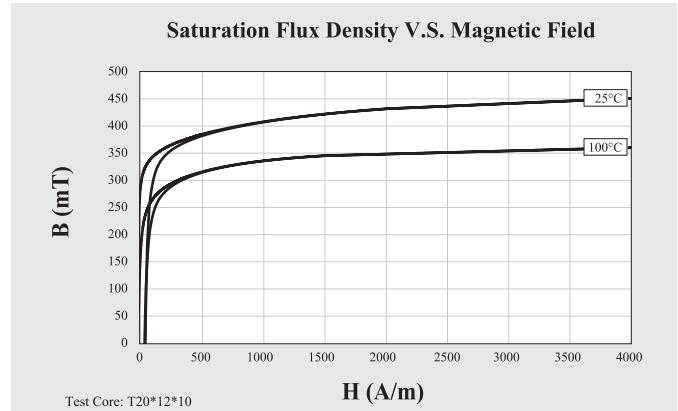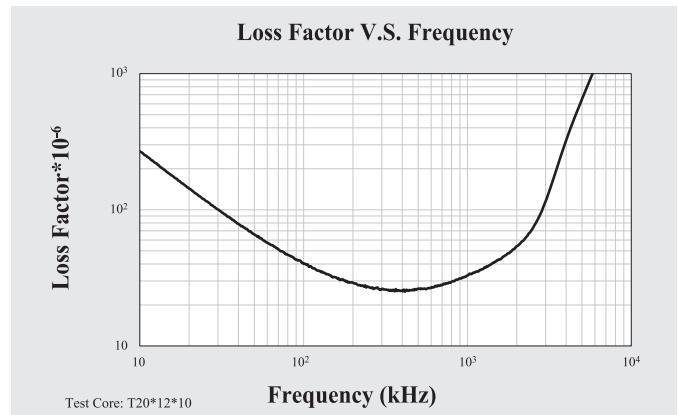

	Symbol	Unit	Measuring Conditions			Automotive High Bs Material B60
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$600 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	430
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	300
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	40
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	25
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 60°C	12
Curie Temperature	Tc	°C				$\geq 210$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.20

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

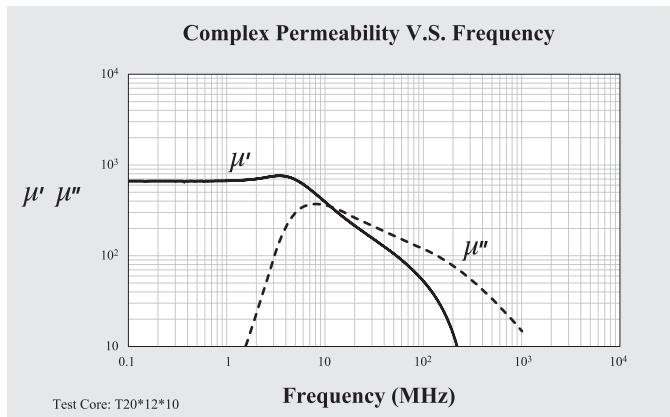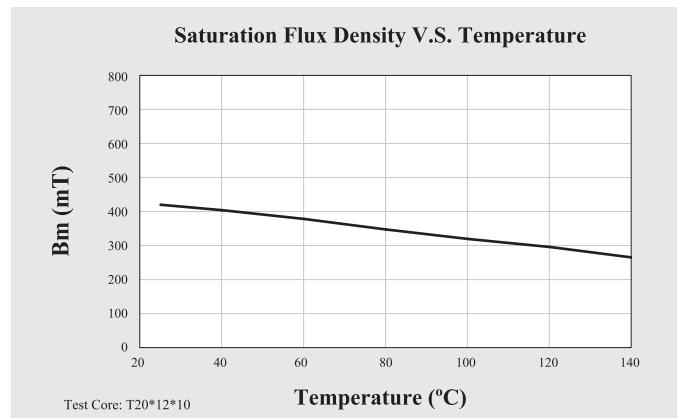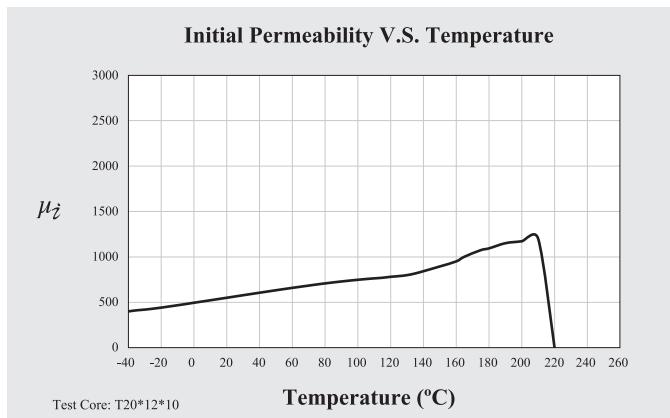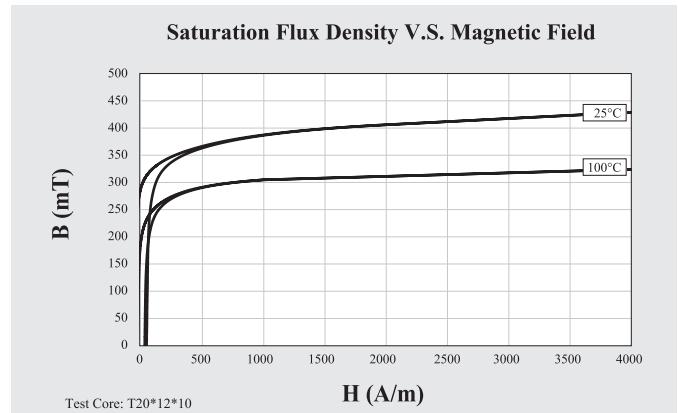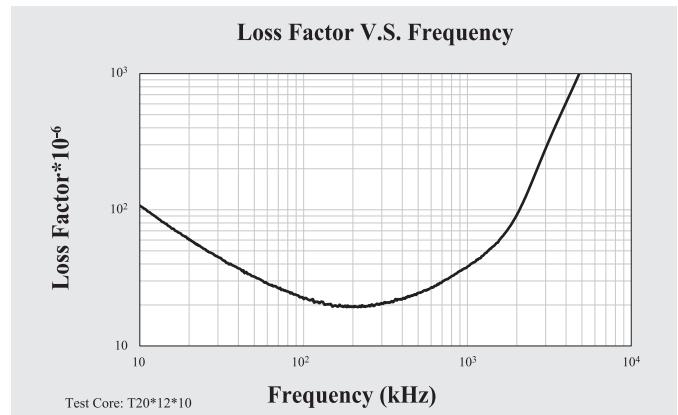

	Symbol	Unit	Measuring Conditions			Low Permeability Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$150 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	410
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	170
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	105
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	180
Curie Temperature	Tc	°C				$\geq 250$
Resistivity	$\rho$	Ωm				$> 10^6$
Density	d	g/cm³				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

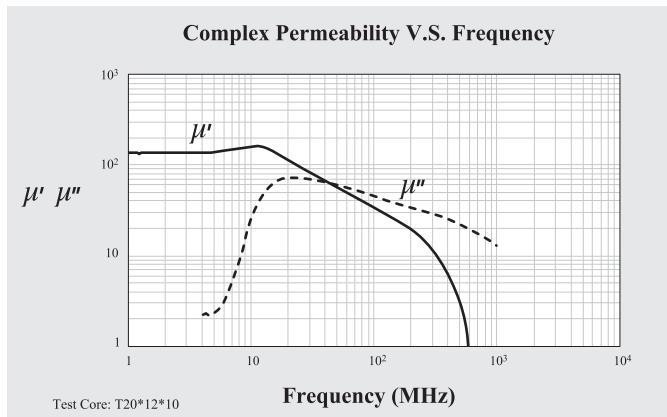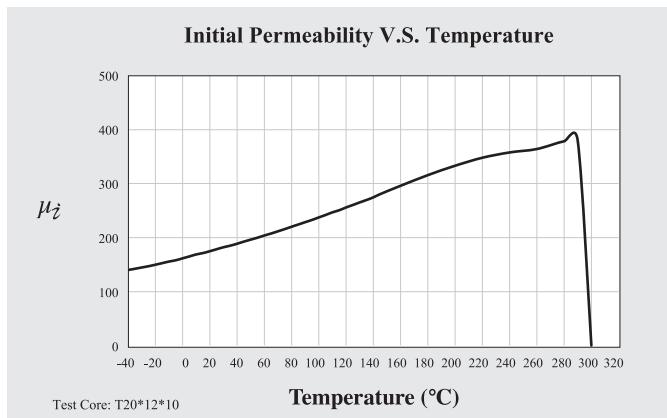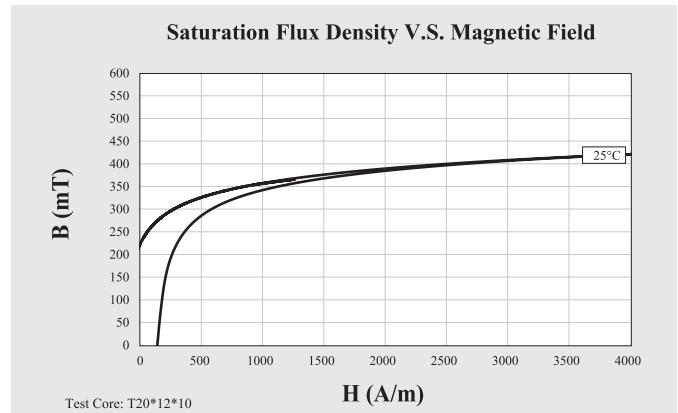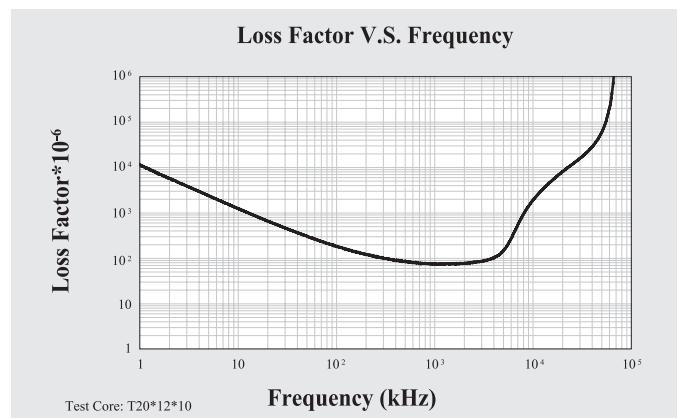

	Symbol	Unit	Measuring Conditions			Low Permeability Material
			Freq.	Flux den.	Temp.	L2
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$75 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	420
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	275
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	140
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10MHz	$< 0.25\text{mT}$	25°C	150
Curie Temperature	Tc	°C				$\geq 250$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

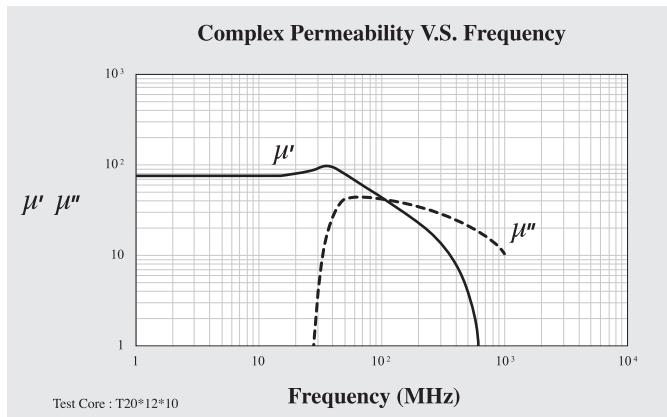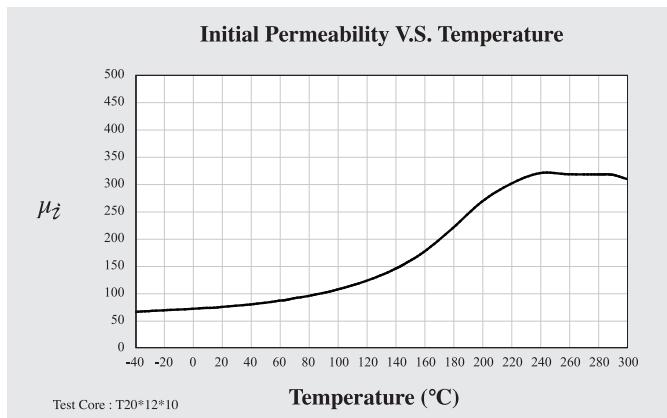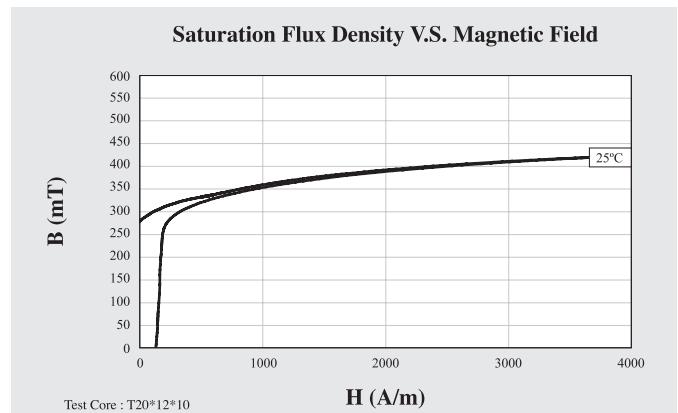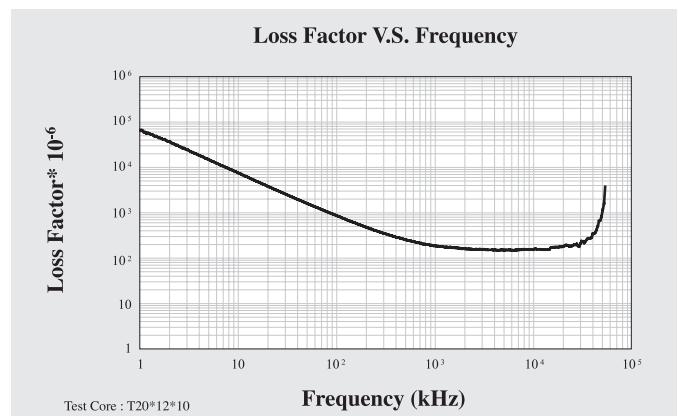

	Symbol	Unit	Measuring Conditions			Low Permeability Material
			Freq.	Flux den.	Temp.	L3
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$20 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 8000\text{A/m}$	25°C	305
Remanence	Br	mT	10kHz	$H = 8000\text{A/m}$	25°C	120
Coercivity	Hc	A/m	10kHz	$H = 8000\text{A/m}$	25°C	600
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10MHz	$< 0.25\text{mT}$	25°C	445
Curie Temperature	Tc	°C				$\geq 300$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

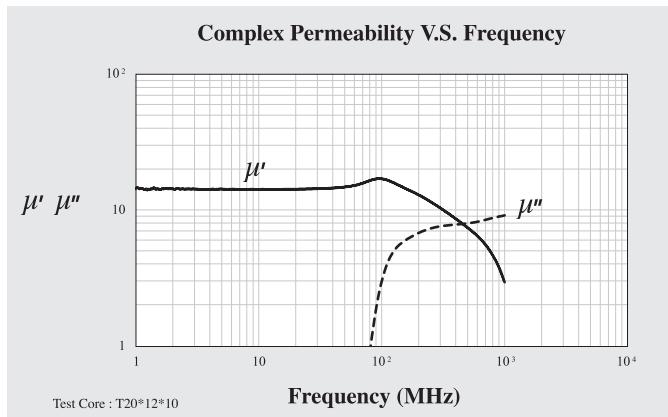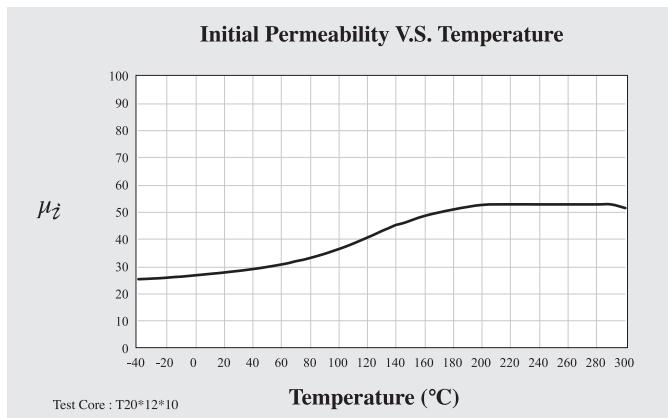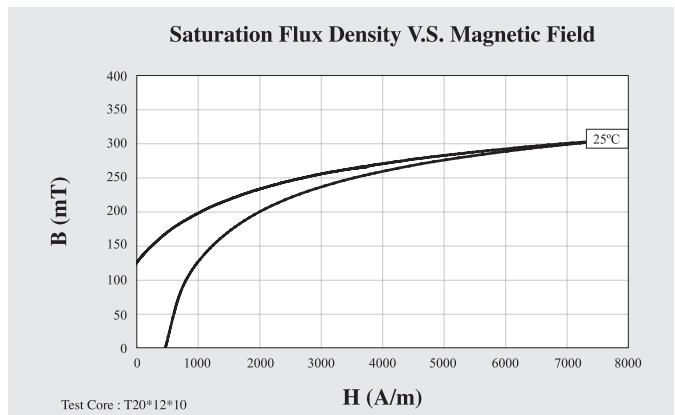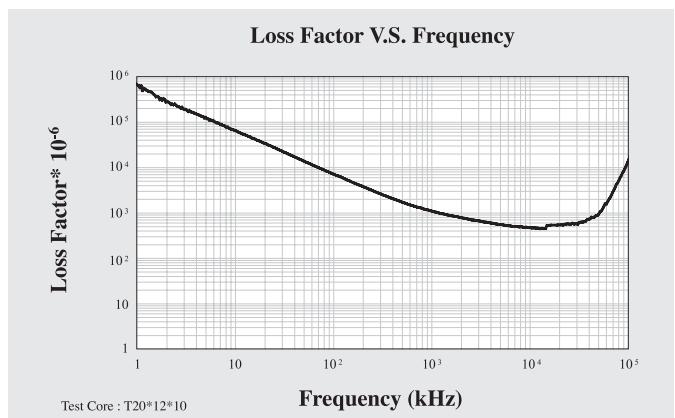

	Symbol	Unit	Measuring Conditions			Low Permeability Material
			Freq.	Flux den.	Temp.	L4
Initial Permeability	$\mu_i$		≤ 10kHz	0.25mT	25°C	50 ± 25%
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	395
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	255
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	200
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10MHz	< 0.25mT	25°C	170
Curie Temperature	Tc	°C				≥ 300
Resistivity	$\rho$	Ωm				> $10^6$
Density	d	g/cm³				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

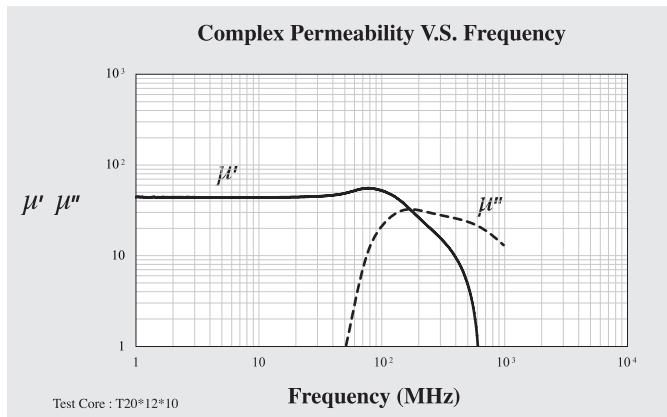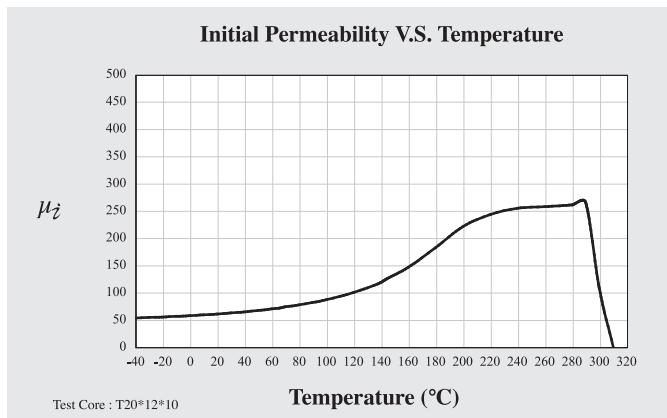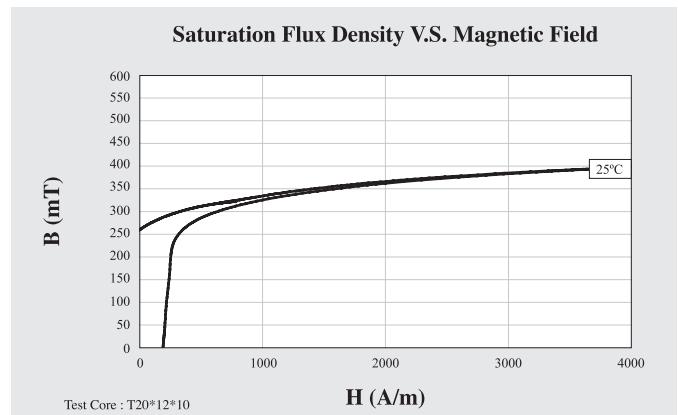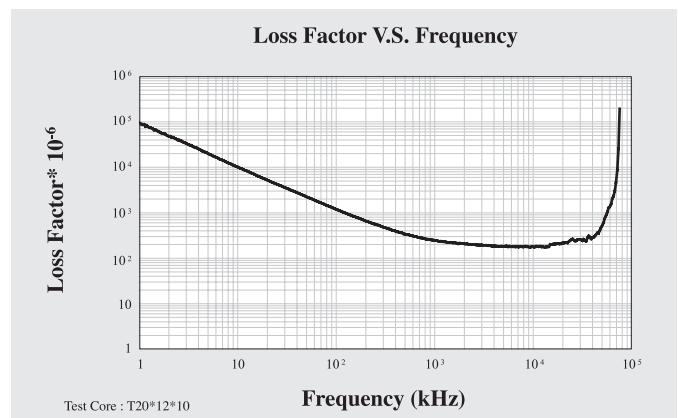

	Symbol	Unit	Measuring Conditions			Low Permeability Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		≤ 10kHz	0.25mT	25°C	120 ± 25%
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	390
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	175
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	140
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	350
Curie Temperature	Tc	°C				≥ 250
Resistivity	$\rho$	Ωm				> $10^6$
Density	d	g/cm³				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

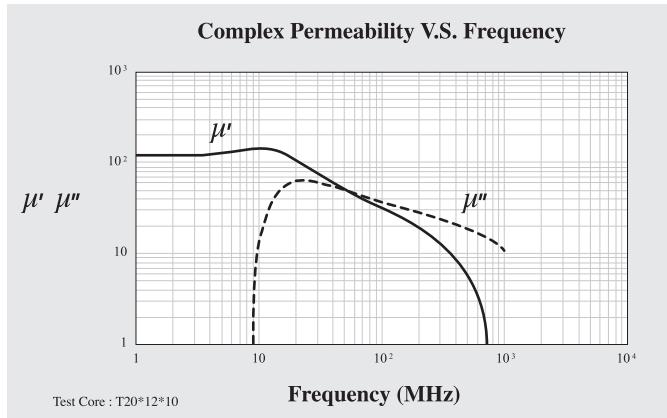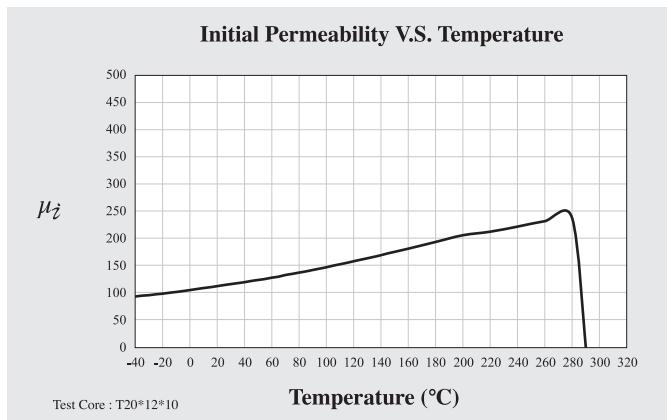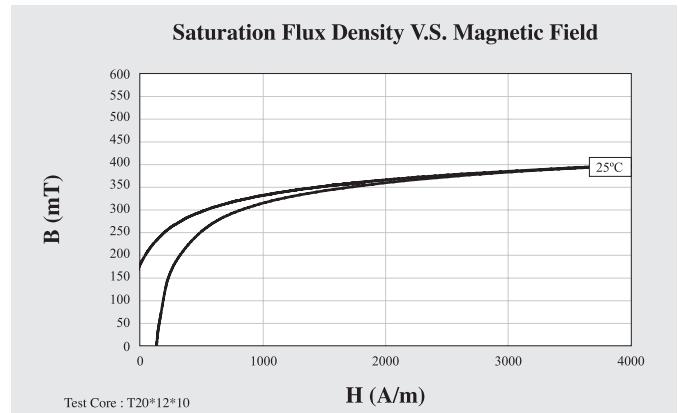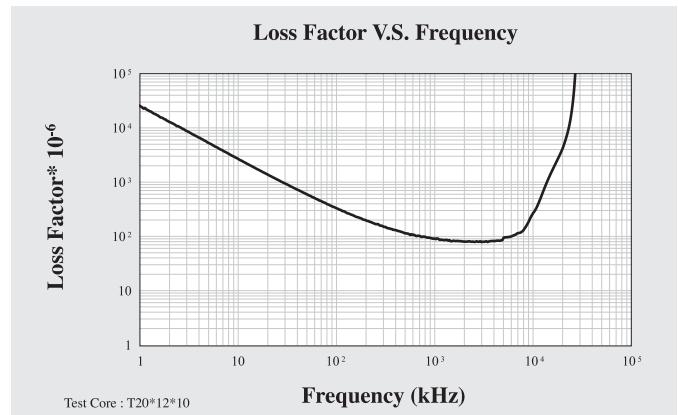

	Symbol	Unit	Measuring Conditions			Low Permeability Material
			Freq.	Flux den.	Temp.	L6
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$14 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 8000\text{A/m}$	25°C	265
Remanence	Br	mT	10kHz	$H = 8000\text{A/m}$	25°C	175
Coercivity	Hc	A/m	10kHz	$H = 8000\text{A/m}$	25°C	1540
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	10MHz	$< 0.25\text{mT}$	25°C	705
Curie Temperature	Tc	°C				$\geq 300$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

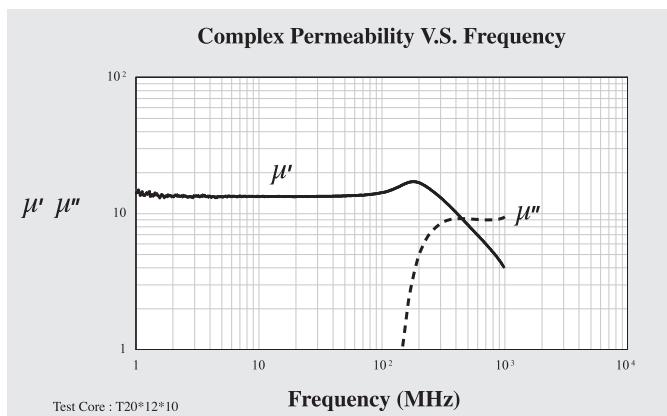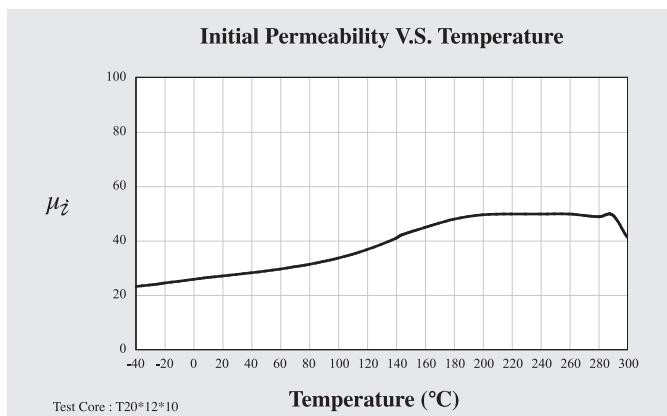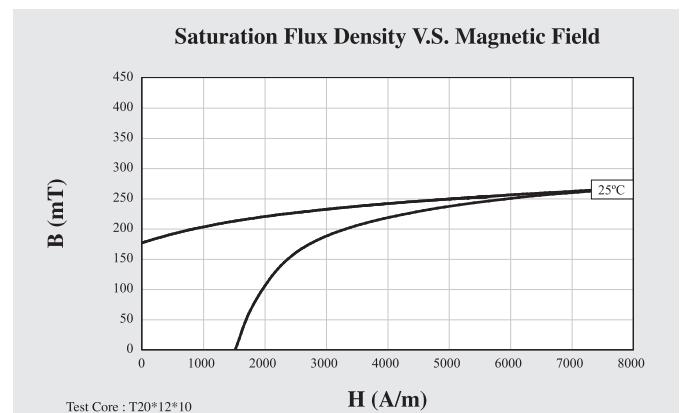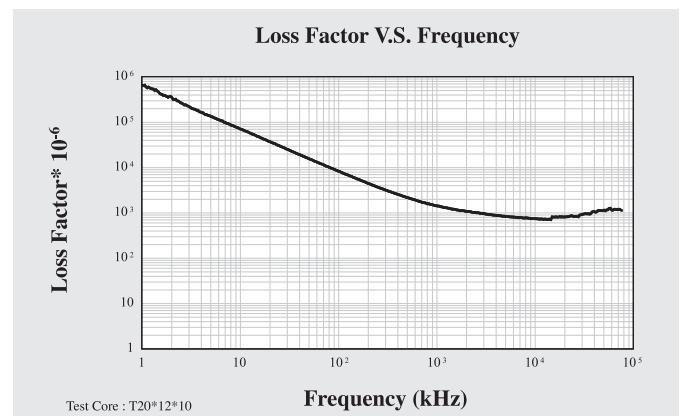

	Symbol	Unit	Measuring Conditions		For Rod Core Antenna Material	
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$50 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	400
					100°C	350
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	195
					100°C	195
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	155
					100°C	120
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C	185
Temperature Factor of Permeability	$\alpha_F$	$10^{-4}/^\circ\text{C}$			20 ~ 80°C	100
Curie Temperature	Tc	°C				$\geq 300$
Resistivity	$\rho$	Ωm				$> 10^6$
Density	d	g/cm³				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

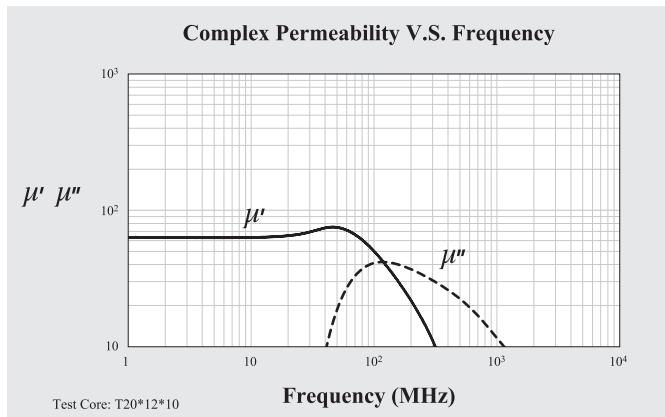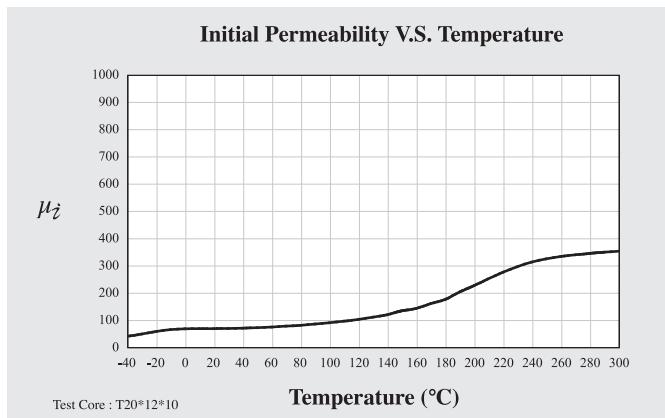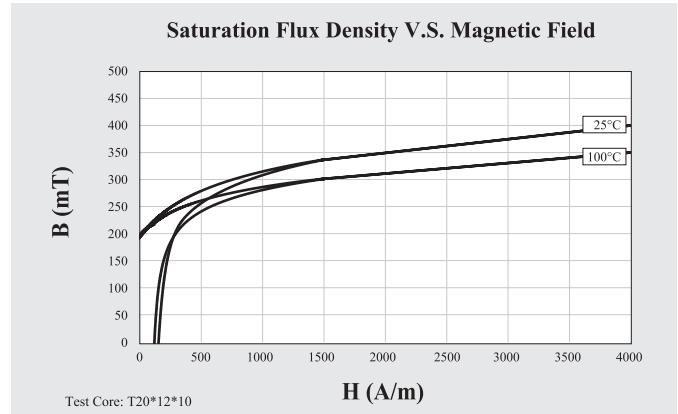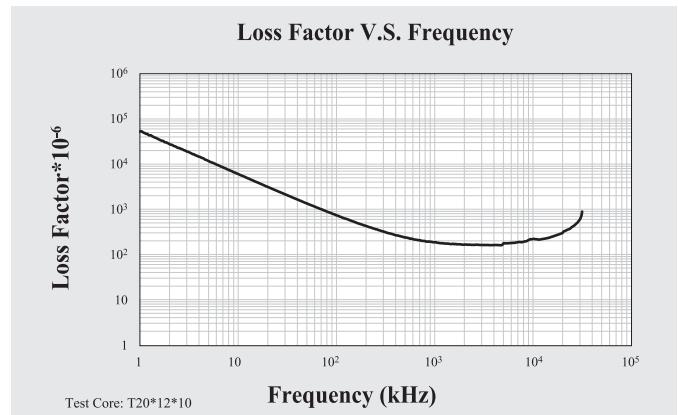

	Symbol	Unit	Measuring Conditions		For Rod Core Antenna Material	
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$100 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	330
					100°C	275
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	225
					100°C	180
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	95
					100°C	65
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C	70
Temperature Factor of Permeability	$\alpha_F$	$10^{-4}/^\circ\text{C}$			20 ~ 80°C	80
Curie Temperature	Tc	°C				$\geq 250$
Resistivity	$\rho$	Ωm				$> 10^6$
Density	d	g/cm³				4.80

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

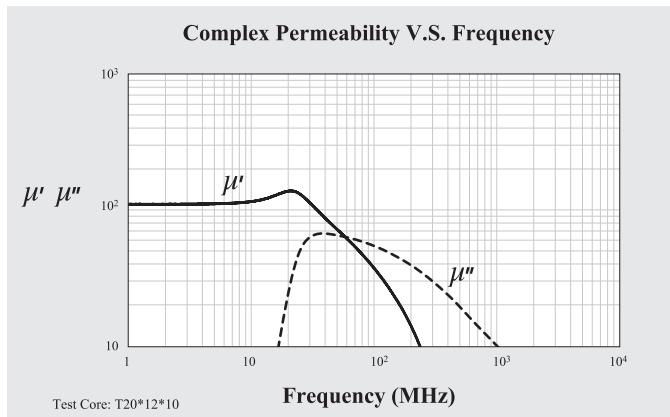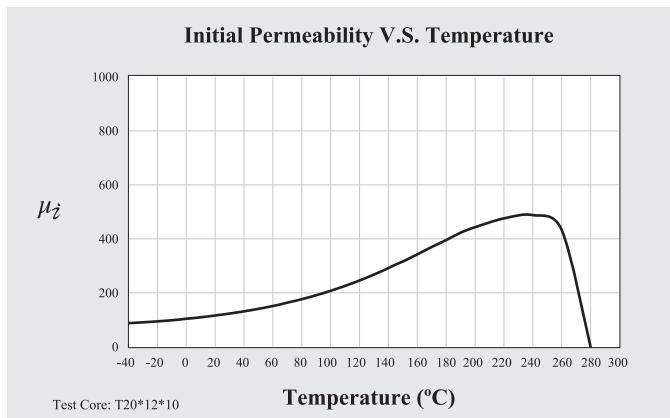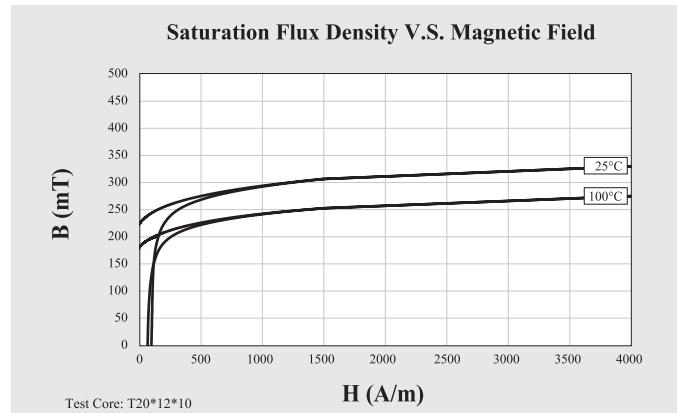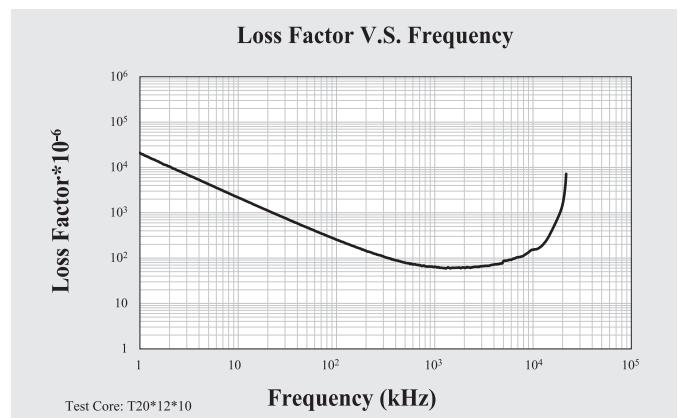

	Symbol	Unit	Measuring Conditions		For Rod Core Antenna Material
			Freq.	Flux den.	Temp.
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C
					100°C
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C
					100°C
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C
					100°C
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C
Temperature Factor of Permeability	$\alpha_F$	$10^{-4}/^\circ\text{C}$			20 ~ 80°C
Curie Temperature	Tc	°C			$\geq 250$
Resistivity	$\rho$	Ωm			$> 10^6$
Density	d	g/cm³			5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

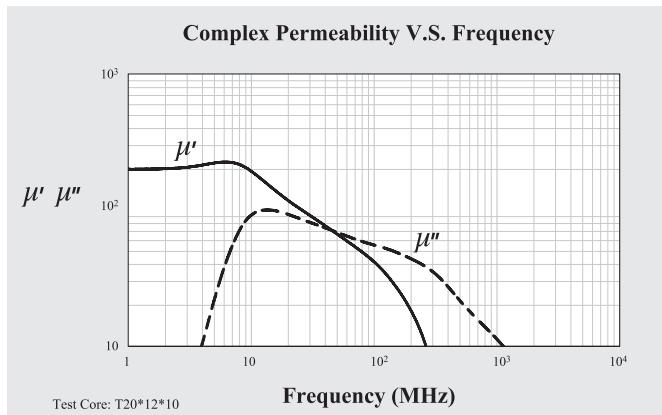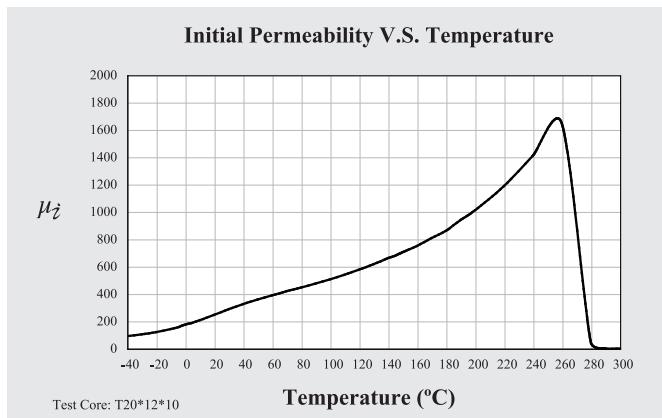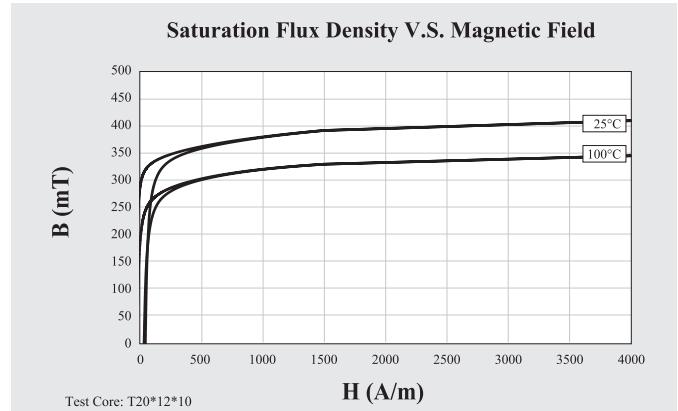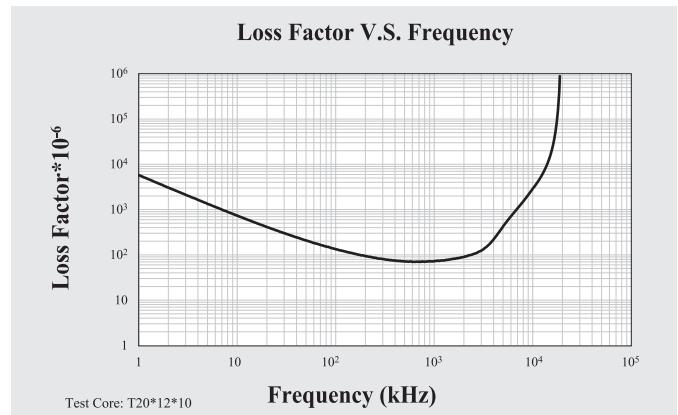

	Symbol	Unit	Measuring Conditions		For Rod Core Antenna Material	
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$230 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	430
					100°C	365
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	250
					100°C	180
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	75
					100°C	60
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C	50
Temperature Factor of Permeability	$\alpha_F$	$10^{-3}/^\circ\text{C}$			20 ~ 80°C	30
Curie Temperature	Tc	°C				$\geq 280$
Resistivity	$\rho$	Ωm				$> 10^6$
Density	d	g/cm³				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

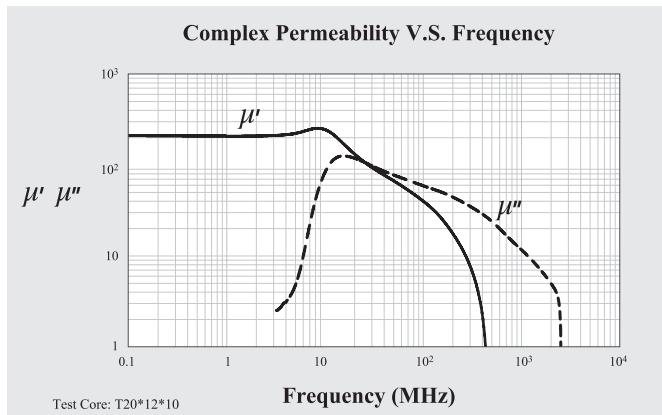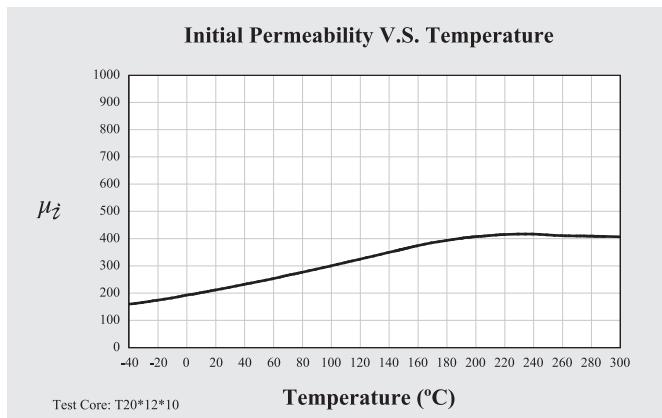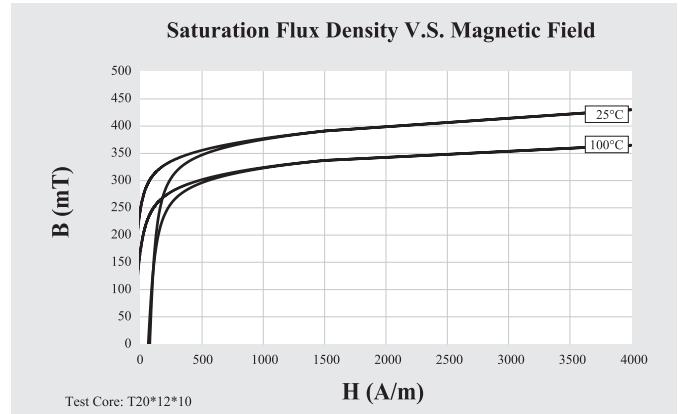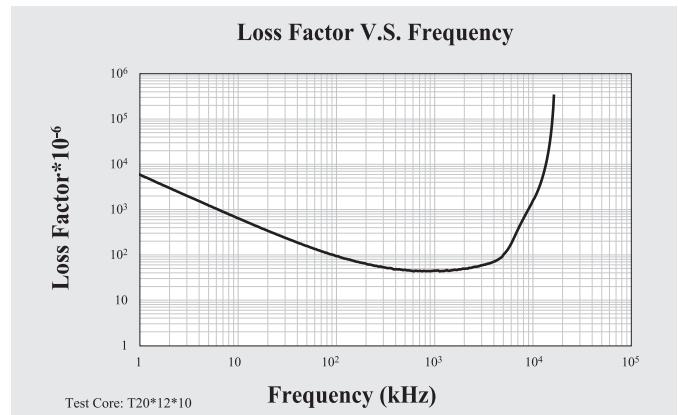

	Symbol	Unit	Measuring Conditions			For Rod Core Antenna Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$200 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	400
					100°C	330
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	290
					100°C	210
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	55
					100°C	35
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C	40
Temperature Factor of Permeability	$\alpha_F$	$10^{-4}/^\circ\text{C}$			20 ~ 80°C	25
Curie Temperature	Tc	°C				$\geq 240$
Resistivity	$\rho$	Ωm				$> 10^6$
Density	d	g/cm³				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

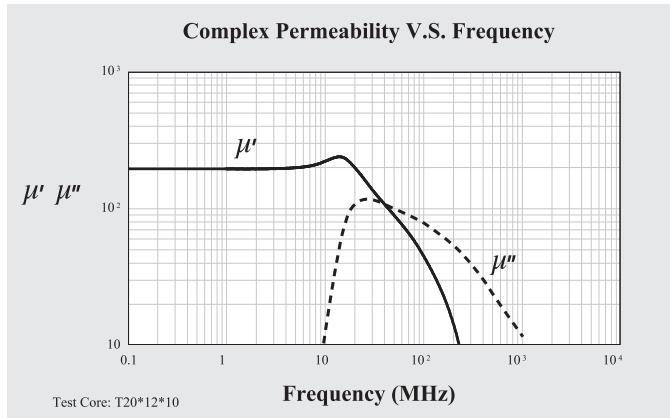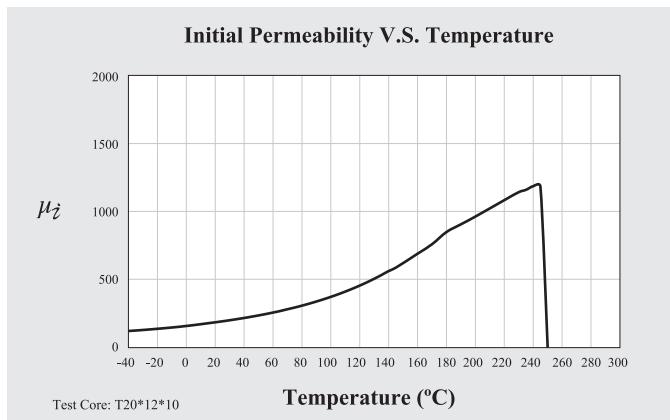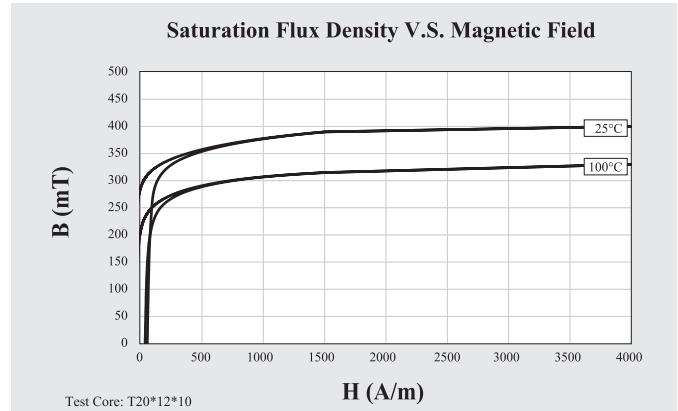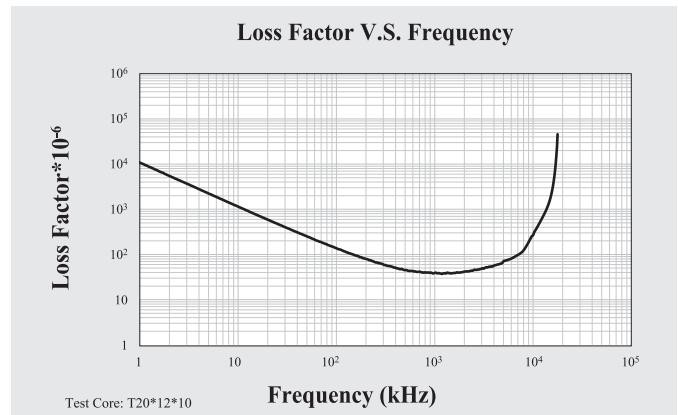

	Symbol	Unit	Measuring Conditions		For Rod Core Antenna Material	
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$300 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	390
					100°C	310
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	260
					100°C	185
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	155
					100°C	125
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C	475
Temperature Factor of Permeability	$\alpha_F$	$10^{-4}/^\circ\text{C}$			20 ~ 80°C	$\leq 5$
Curie Temperature	Tc	°C				$\geq 200$
Resistivity	$\rho$	Ωm				$> 10^6$
Density	d	g/cm³				5.00

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

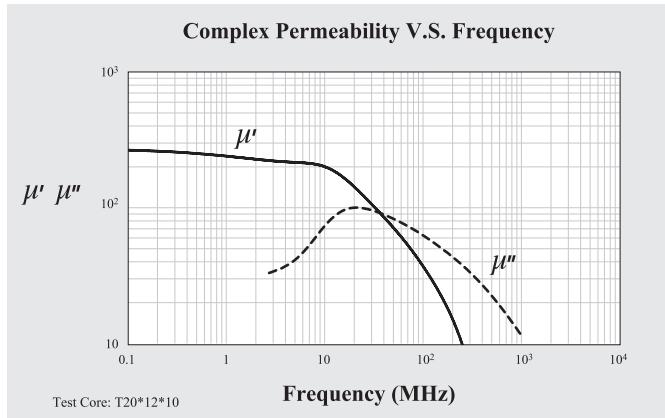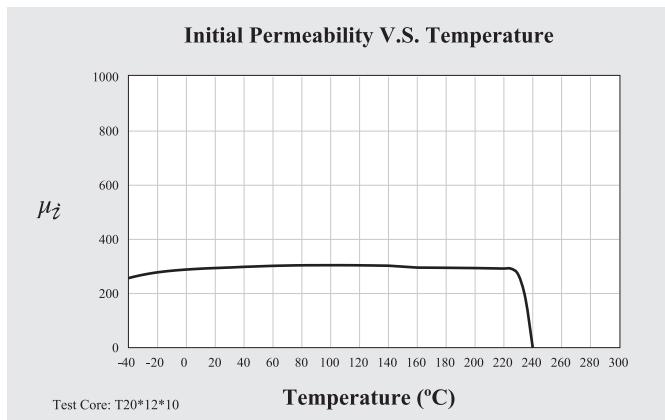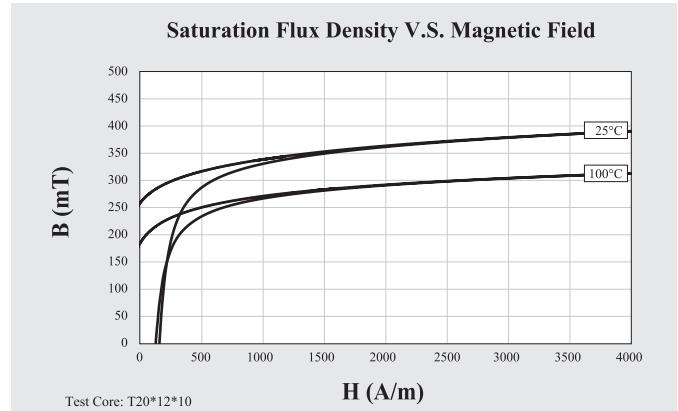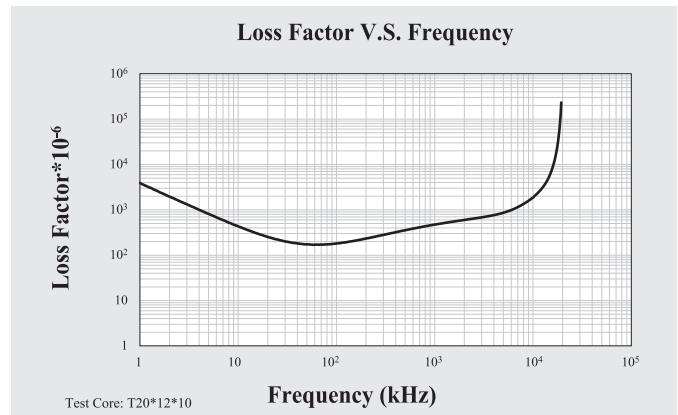

	Symbol	Unit	Measuring Conditions		Wide Temperature RFID Material	
			Freq.	Flux den.		
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$100 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	330
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	185
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	220
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz	< 0.25mT	25°C	55
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	< 0.25mT	20 ~ 80°C	$\leq 35$
Curie Temperature	Tc	°C				$\geq 170$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

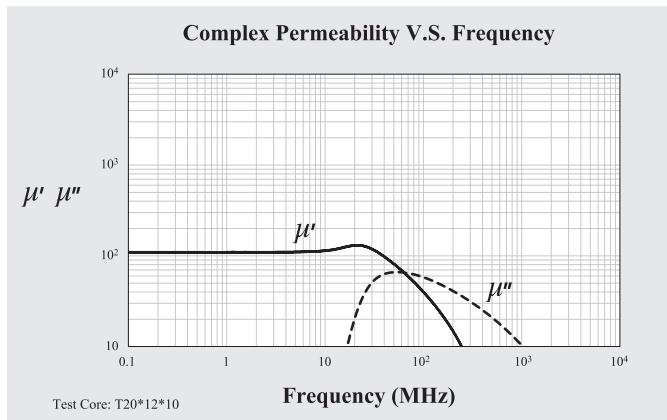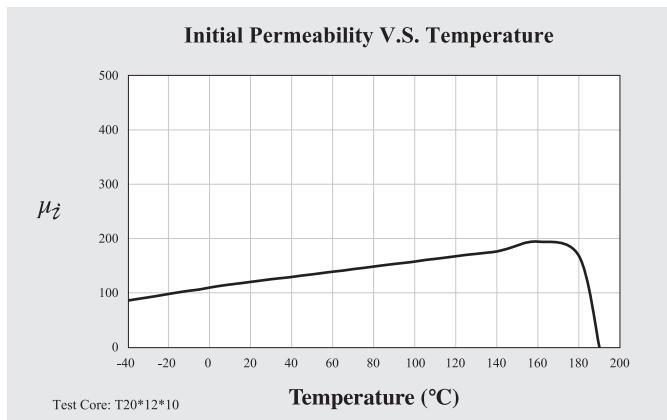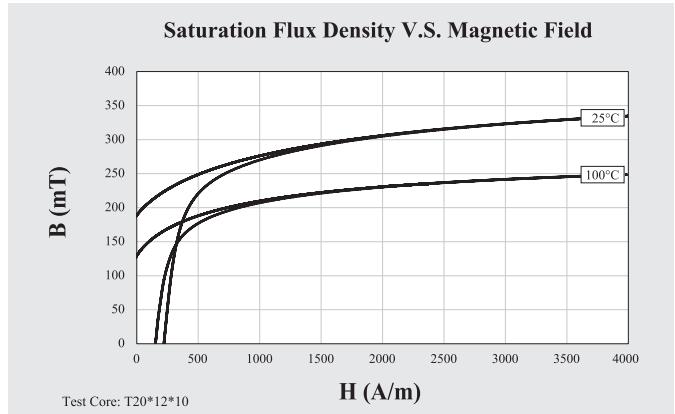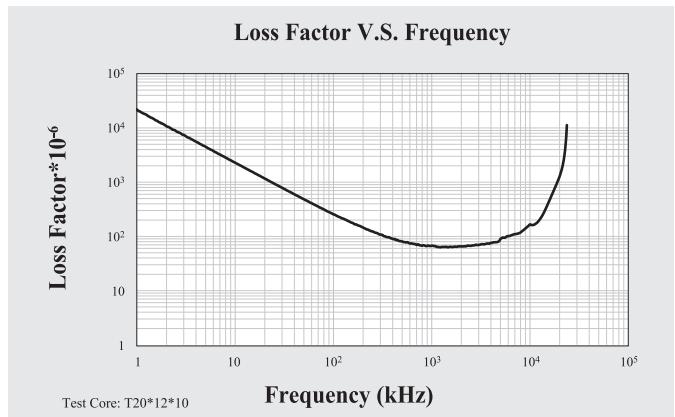

	Symbol	Unit	Measuring Conditions		Wide Temperature RFID Material	
			Freq.	Flux den.		
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$410 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	325
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	140
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	90
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	$< 0.25\text{mT}$	25°C	50
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	$< 0.25\text{mT}$	20 ~ 60°C	$-3 \sim -1$
Curie Temperature	Tc	°C				$\geq 140$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

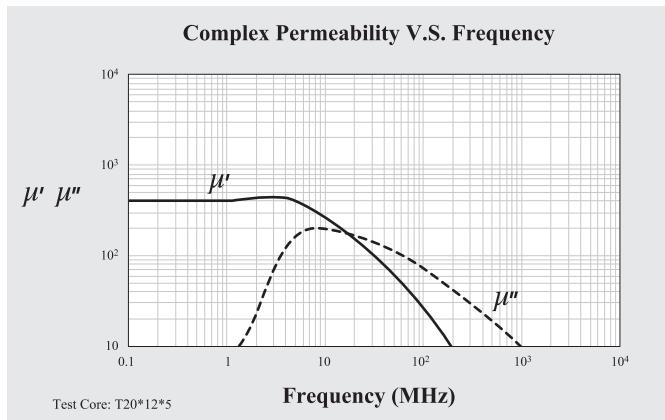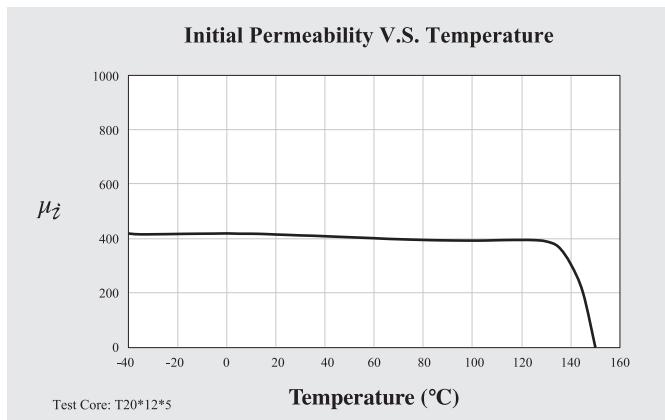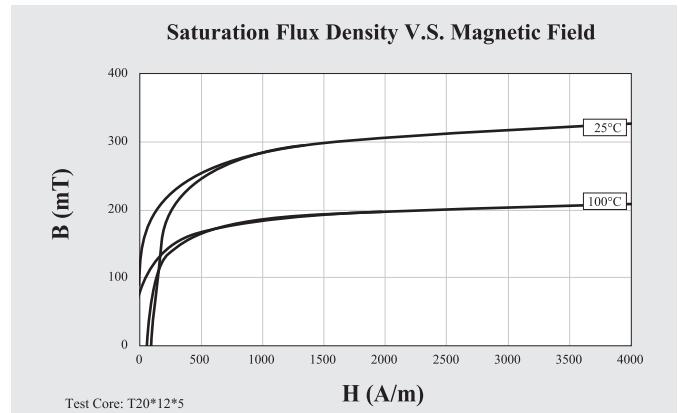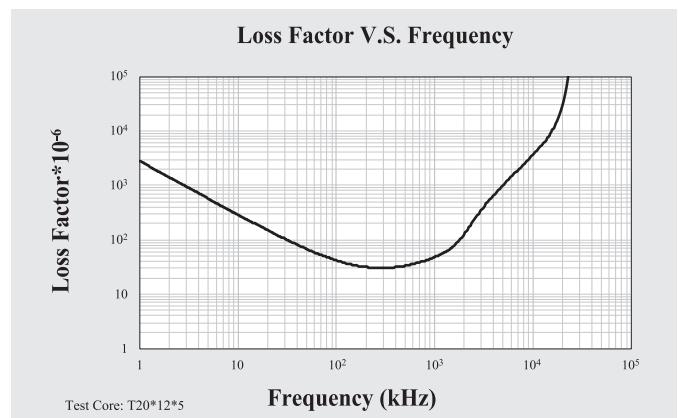

	Symbol	Unit	Measuring Conditions		Wide Temperature RFID Material	
			Freq.	Flux den.	Temp.	F80
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$800 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	360
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	155
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	45
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	$< 0.25\text{mT}$	25°C	20
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	$< 0.25\text{mT}$	20 ~ 60°C	-1 ~ 1
Curie Temperature	Tc	°C				$\geq 150$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

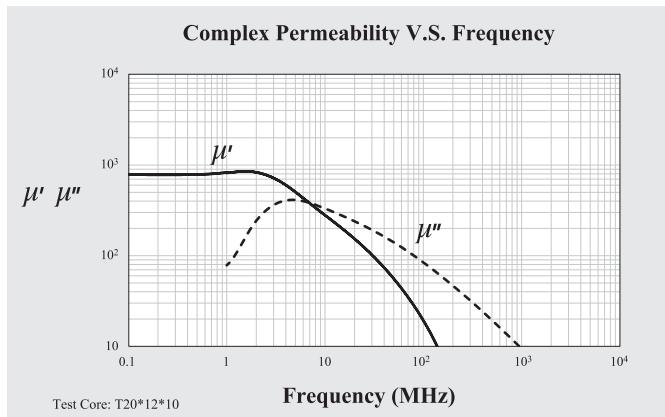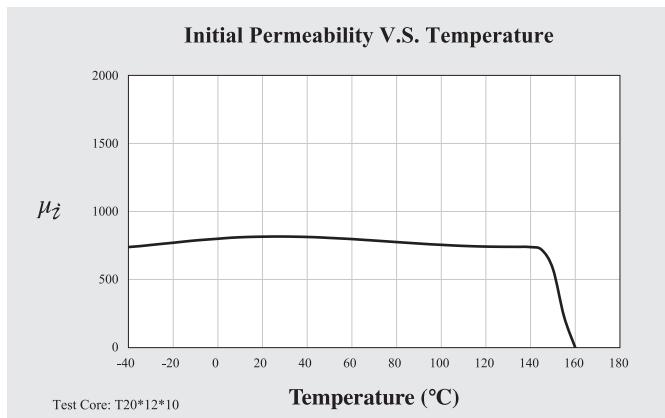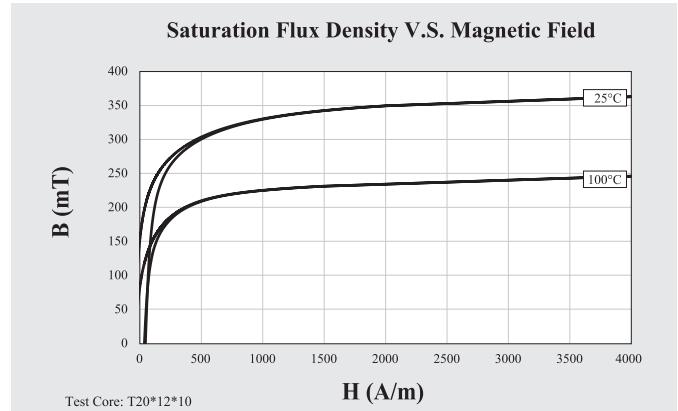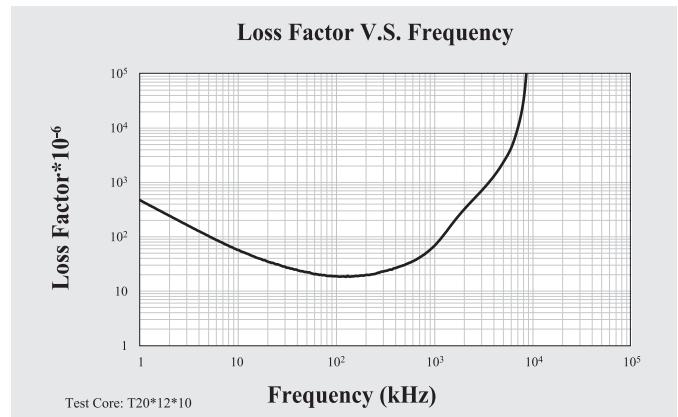

	Symbol	Unit	Measuring Conditions		Wide Temperature RFID Material	
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$1000 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	335
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	140
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	33
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	0.1MHz	< 0.25mT	25°C	16
Temperature Factor of	$\alpha_f$	$10^{-6}\text{°C}$	10kHz	< 0.25mT	20 ~ 60°C	-1 ~ 1
Permeability						
Curie Temperature	Tc	°C				$\geq 130$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

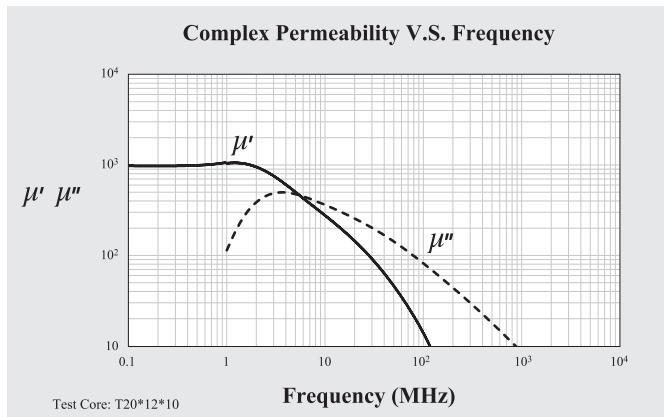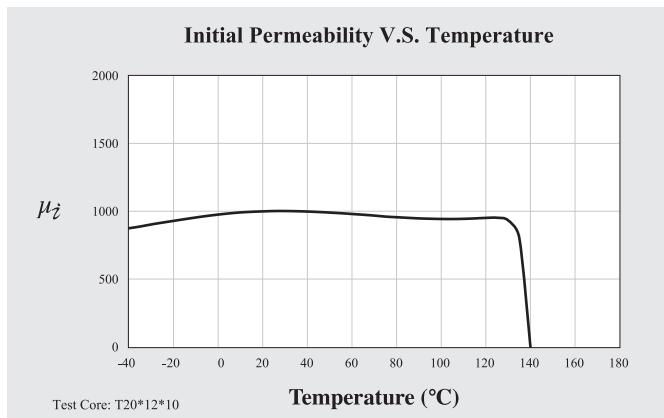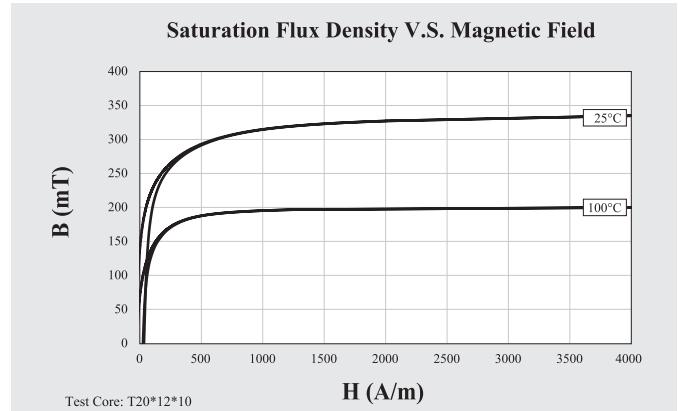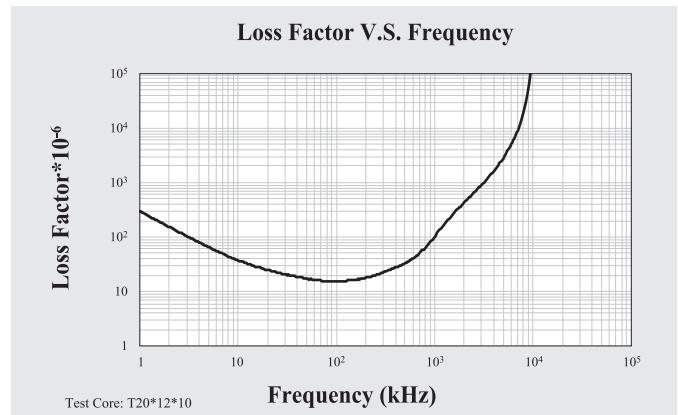

	Symbol	Unit	Measuring Conditions		For Rod Core Antenna Material	
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$125 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	320
					100°C	260
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	235
					100°C	175
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	80
					100°C	50
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C	110
Temperature Factor of Permeability	$\alpha_F$	$10^{-3}/^\circ\text{C}$			20 ~ 80°C	110
Curie Temperature	Tc	°C				$\geq 230$
Resistivity	$\rho$	Ωm				$> 10^6$
Density	d	g/cm³				4.60

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

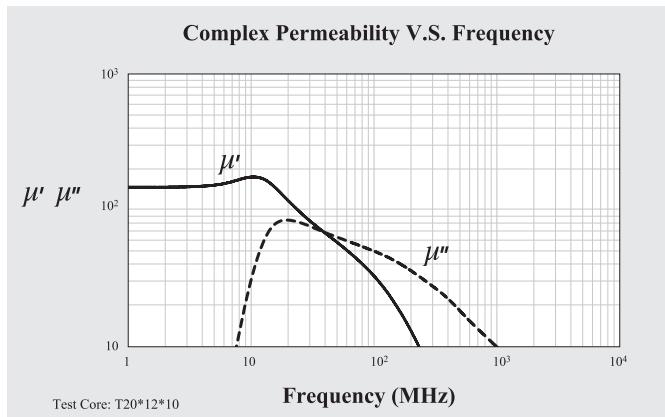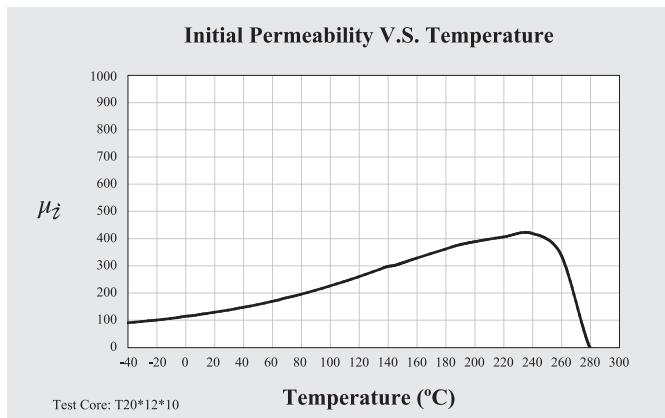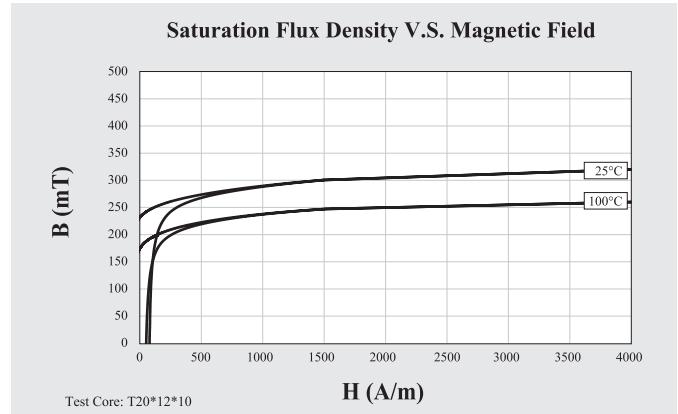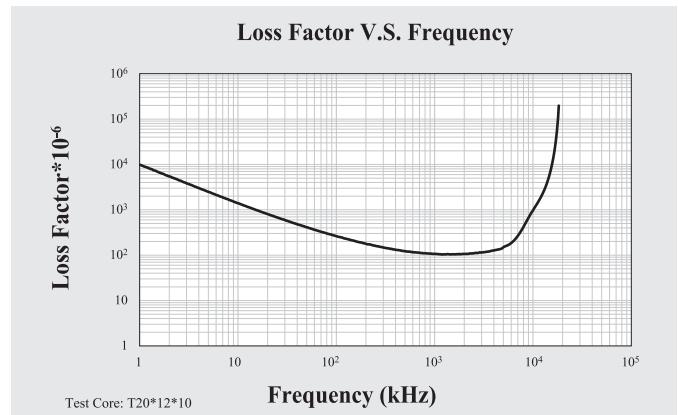

	Symbol	Unit	Measuring Conditions		For Rod Core Antenna Material
			Freq.	Flux den.	Temp.
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C
					100°C
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C
					100°C
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C
					100°C
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C
Temperature Factor of Permeability	$\alpha_F$	$10^{-4}/^\circ\text{C}$			20 ~ 80°C
Curie Temperature	Tc	°C			$\geq 220$
Resistivity	$\rho$	Ωm			$> 10^6$
Density	d	g/cm³			4.80

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

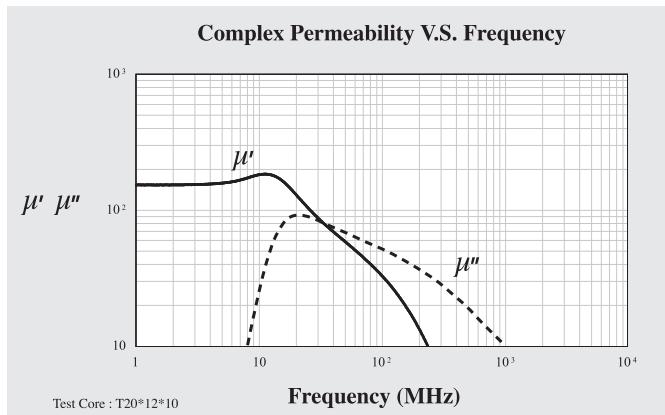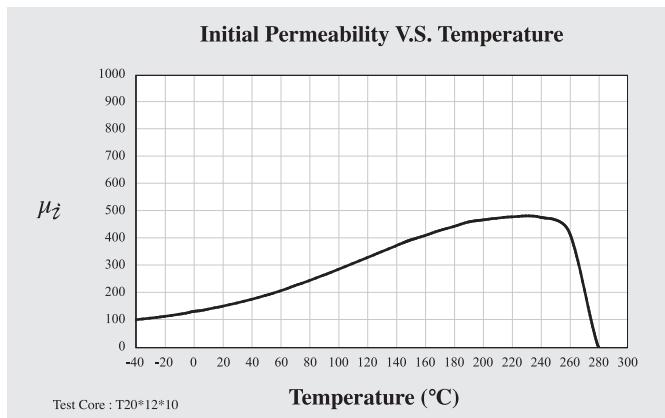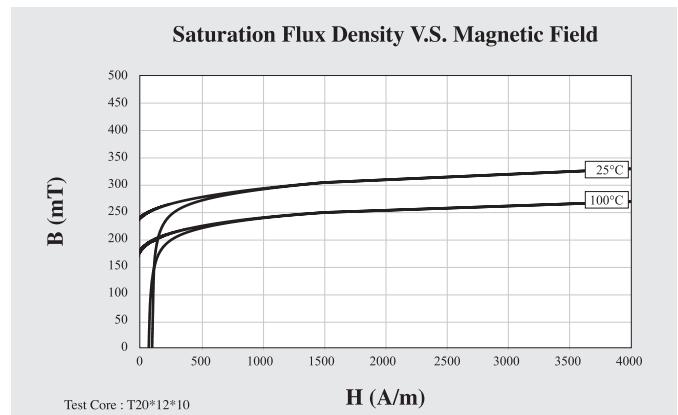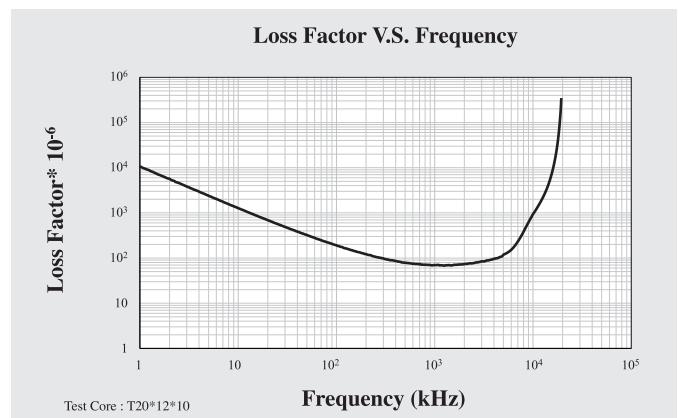

	Symbol	Unit	Measuring Conditions		For Rod Core Antenna Material	
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	$300 \pm 25\%$
Saturation Flux Density	Bs	mT	10kHz	$H = 4000\text{A/m}$	25°C	330
					100°C	240
Remanence	Br	mT	10kHz	$H = 4000\text{A/m}$	25°C	205
					100°C	130
Coercivity	Hc	A/m	10kHz	$H = 4000\text{A/m}$	25°C	55
					100°C	35
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	1MHz		25°C	35
Temperature Factor of Permeability	$\alpha_F$	$10^{-3}/^\circ\text{C}$			20 ~ 80°C	100
Curie Temperature	Tc	°C				$\geq 160$
Resistivity	$\rho$	Ωm				$> 10^6$
Density	d	g/cm³				4.80

Note: Material characteristics are typical for a toroid core.





Product specification will differ from these data due to the influence of geometry and size.

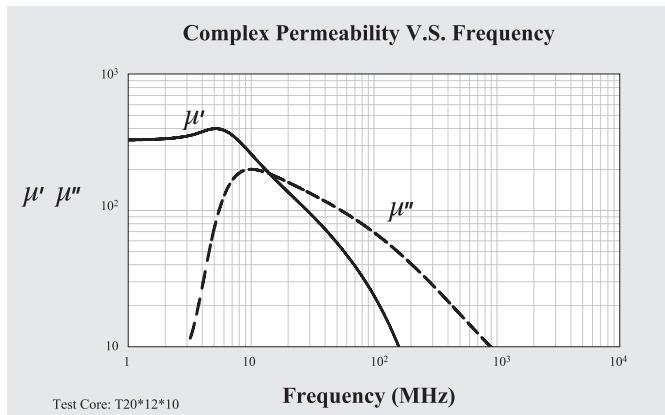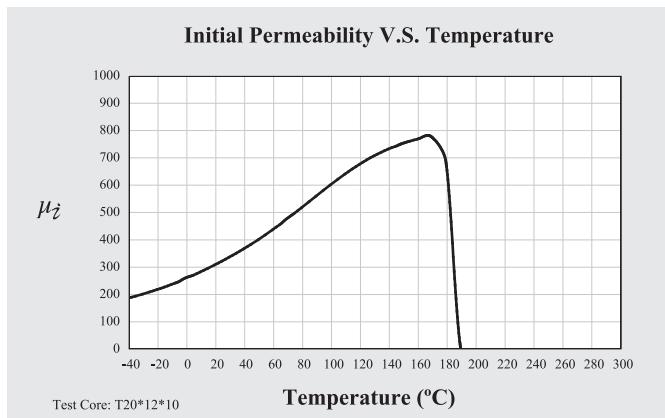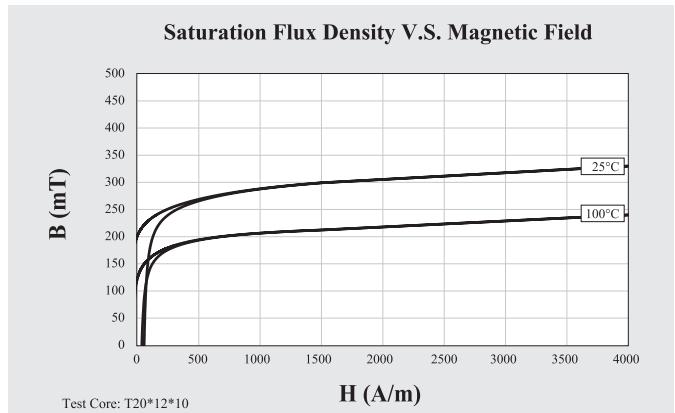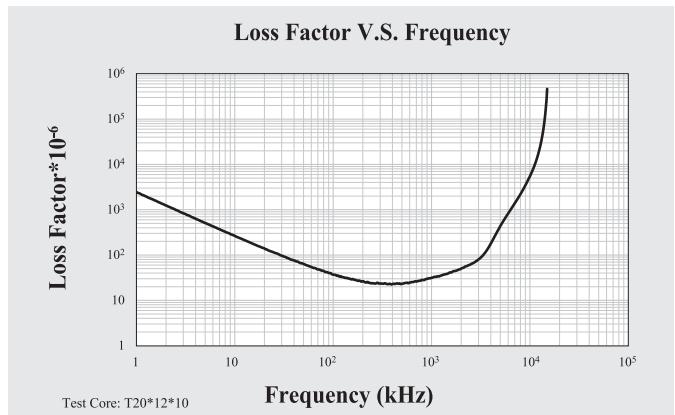

	Symbol	Unit	Measuring Conditions			EMI-Filter Material
			Freq.	Flux den.	Temp.	
Initial Permeability	$\mu_i$		$\leq 10\text{kHz}$	0.25mT	25°C	800 ± 25%
Saturation Flux Density	Bs	mT	10kHz	H = 4000A/m	25°C	315
Remanence	Br	mT	10kHz	H = 4000A/m	25°C	215
Coercivity	Hc	A/m	10kHz	H = 4000A/m	25°C	17
Relative Loss Factor	$\tan\delta/\mu_i$	$10^{-6}$	100kHz	< 0.25mT	25°C	19
Temperature Factor of Permeability	$\alpha_p$	$10^{-6}\text{°C}$	10kHz	< 0.25 mT	20 ~ 60°C	10
Curie Temperature	Tc	°C				$\geq 140$
Resistivity	$\rho$	$\Omega\text{m}$				$> 10^6$
Density	d	$\text{g/cm}^3$				5.10

Note: Material characteristics are typical for a toroid core.

Product specification will differ from these data due to the influence of geometry and size.

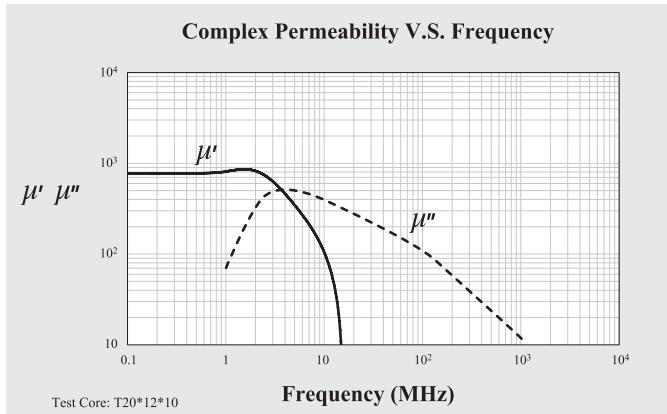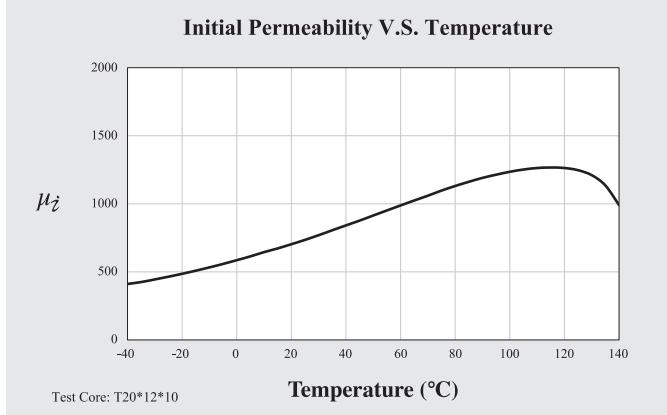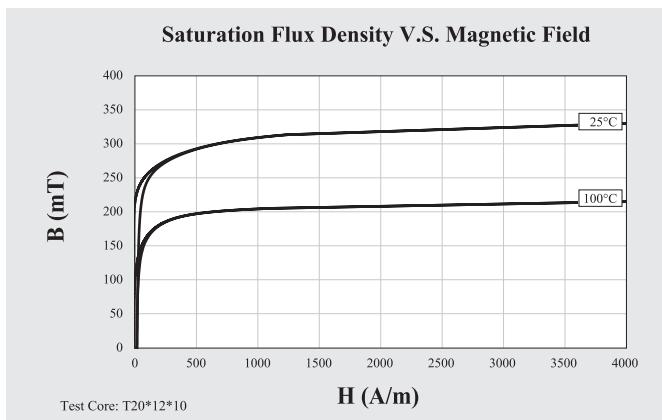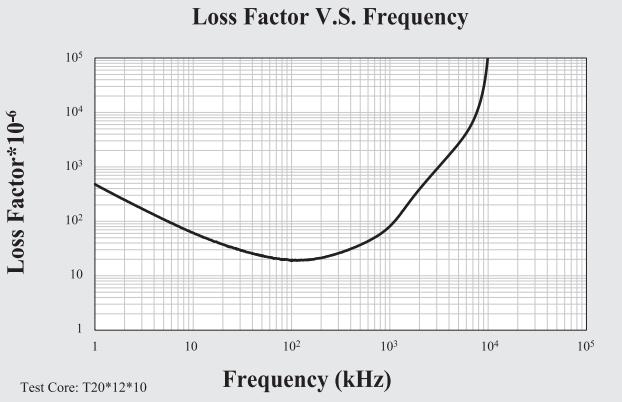

## Type : CI Cores (Power Inductor)


Ordering Code: P47 CI4.4/4.0/1.35/0.9

Material  
材質


Core Size  
品名

Shape:


Type:1

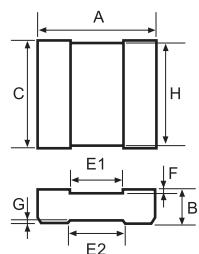


A1





Type:2

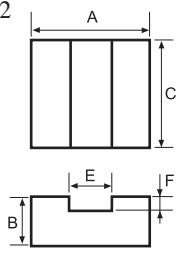



A1





Type:3

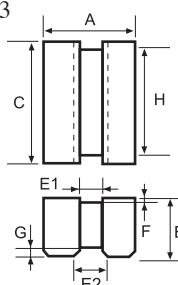



Type:4

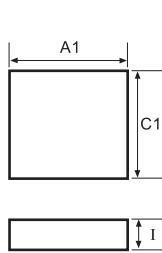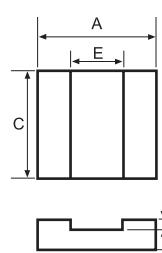

Type:5

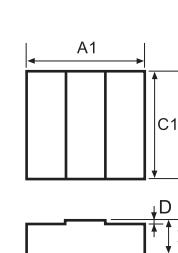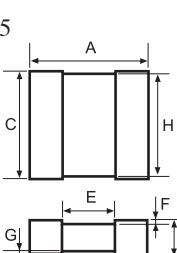

Type:6

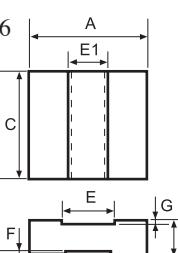

## DIMENSIONS

CORES	DIMENSIONS (mm)						
	A	B	C	D	E	E1	E2
<b>CI4.4/4.0/1.35/0.9</b>	4.40 ± 0.15	1.30 ± 0.10	4.00 ± 0.15	—	1.80 ± 0.15	—	—
<b>CI5.6/5.65/2.9/2.0</b>	5.60 ± 0.15	2.90 ± 0.10	5.65 ± 0.15	0.15 ± 0.10	2.00 ± 0.10	2.00 ± 0.10	—
<b>CI6.0/3.6/1.2/0.95</b>	6.00 ± 0.20	1.20 ± 0.10	3.60 ± 0.20	—	3.63 ± 0.20	—	—
<b>CI6.35/6.35</b>	6.35 ± 0.13	2.40 ± 0.10	6.35 ± 0.13	—	3.05ref	—	—
<b>CI6.35/6.35A</b>	6.35 ± 0.10	1.45 ± 0.10	6.35 ± 0.10	—	3.20 ± 0.10	—	—
<b>CI6.6/6.1</b>	6.61 ± 0.15	2.74 ± 0.10	6.10 ± 0.15	—	—	2.60 ± 0.10	3.25ref
<b>CI6.6/6.8/2.65/2</b>	6.60 ± 0.20	2.65 ± 0.10	6.80 ± 0.20	—	—	2.70 ± 0.15	2.80 ± 0.15
<b>CI6.6/9.1</b>	6.61 ± 0.15	2.74 ± 0.10	9.07 ± 0.15	—	—	2.60 ± 0.10	3.25ref
<b>CI6.6/9.1A</b>	6.61 ± 0.15	4.00 ± 0.20	9.07 ± 0.15	—	—	2.60 ± 0.10	3.25 ± 0.10
<b>CI6.6A/6.1/2.55/1.8</b>	6.61 ± 0.15	2.55 ± 0.10	6.10 ± 0.15	—	3.15 ± 0.15	2.60 ± 0.15	—
<b>CI6.6B/6.0/2.25/2.24</b>	6.60 ± 0.15	2.55 ± 0.10	6.00 ± 0.15	—	—	—	—
<b>CI6.6D/9.1/2.25/2.24</b>	6.60 ± 0.15	2.55 ± 0.10	9.10 ± 0.15	—	—	—	—
<b>CI6.6F/6.8/2.65/2.1</b>	6.60 ± 0.15	2.65 ± 0.10	6.80 ± 0.20	—	—	2.70 ± 0.10	2.90 ± 0.10
<b>CI6.7/6.7/3.6/3</b>	6.70 ± 0.15	3.60 ± 0.10	6.70 ± 0.15	—	—	2.20 ± 0.10	2.50 ± 0.20
<b>CI6.8B/6.8/2.45/1.9</b>	6.80 ± 0.15	2.45 ± 0.10	6.80 ± 0.15	—	2.50 ± 0.15	—	—
<b>CI6.85A/9.2/2.2/1.65</b>	6.85 ± 0.15	2.20 ± 0.10	9.20 ± 0.10	—	2.55 ± 0.15	—	—

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>CI4.4/4.0/1.35/0.9</b>	1.89	7.70	4.07	31.32	0.18
<b>CI5.6/5.65/2.9/2.0</b>	1.00	11.37	11.33	128.84	0.67
<b>CI6.0/3.6/1.2/0.95</b>	3.11	11.07	3.56	39.37	0.20
<b>CI6.35/6.35</b>	1.01	12.69	12.60	159.89	0.81
<b>CI6.35/6.35A</b>	1.51	11.20	7.40	82.88	0.48
<b>CI6.6/6.1</b>	1.03	12.33	11.96	147.54	0.83
<b>CI6.6/6.8/2.65/2</b>	0.96	12.90	13.48	173.89	0.91
<b>CI6.6/9.1</b>	0.67	12.23	18.19	222.46	1.26
<b>CI6.6/9.1A</b>	0.63	14.06	22.20	312.13	1.26
<b>CI6.6A/6.1/2.55/1.8</b>	1.04	12.38	11.88	147.10	0.84
<b>CI6.6B/6.0/2.25/2.24</b>	1.01	12.36	12.20	150.83	0.79
<b>CI6.6D/9.1/2.25/2.24</b>	0.67	12.36	18.51	228.76	1.19
<b>CI6.6F/6.8/2.65/2.1</b>	0.94	13.02	13.81	179.79	0.94
<b>CI6.7/6.7/3.6/3</b>	0.78	13.87	17.69	245.38	1.32
<b>CI6.8B/6.8/2.45/1.9</b>	0.88	12.21	13.92	169.98	0.95
<b>CI6.85A/9.2/2.2/1.65</b>	0.73	12.08	16.48	199.11	1.20

## ■ DIMENSIONS








CORES	DIMENSIONS (mm)							Type
	F	G	H	J	A1	C1	I	
<b>CI4.4/4.0/1.35/0.9</b>	0.35 ± 0.08	—	—	—	4.40 ± 0.15	4.00 ± 0.15	0.90 ± 0.05	4
<b>CI5.6/5.65/2.9/2.0</b>	0.60 ± 0.10	0.15 ± 0.10	4.95 ± 0.15	—	5.60 ± 0.15	5.65 ± 0.15	2.00 ± 0.05	5
<b>CI6.0/3.6/1.2/0.95</b>	0.25 ± 0.08	—	—	—	6.00 ± 0.20	3.60 ± 0.20	0.95 ± 0.05	4
<b>CI6.35/6.35</b>	0.35 ± 0.10	0.22 ± 0.05	—	1.40 ± 0.10	6.35 ± 0.13	6.35 ± 0.13	2.27 ± 0.10	2
<b>CI6.35/6.35A</b>	0.40 <sup>+0.10</sup> <sub>-0.07</sub>	0.25 ± 0.05	—	1.60 ± 0.10	6.35 ± 0.10	6.35 ± 0.10	1.10 ± 0.10	2
<b>CI6.6/6.1</b>	0.51 ± 0.10	0.25 ± 0.10	—	—	6.71 ± 0.15	6.20 ± 0.15	1.86 ± 0.10	1
<b>CI6.6/6.8/2.65/2</b>	0.50 ± 0.10	0.15 ± 0.10	6.15 ± 0.20	—	6.60 ± 0.20	6.80 ± 0.20	2.00 ± 0.10	1
<b>CI6.6/9.1</b>	0.51 ± 0.10	0.25 ± 0.10	—	—	6.71 ± 0.15	9.15 ± 0.15	1.86 ± 0.10	1
<b>CI6.6/9.1A</b>	0.61 <sup>+0.10</sup> <sub>-0.07</sub>	0.25 ± 0.10	—	—	6.71 ± 0.15	9.15 ± 0.15	2.50 ± 0.20	1
<b>CI6.6A/6.1/2.55/1.8</b>	0.51 ± 0.10	0.25 ± 0.10	—	—	6.71 ± 0.15	6.20 ± 0.15	1.80 ± 0.10	6
<b>CI6.6B/6.0/2.25/2.24</b>	0.40 ± 0.10	0.24 ± 0.10	—	—	6.60 ± 0.15	6.00 ± 0.15	2.24 ± 0.10	7
<b>CI6.6D/9.1/2.25/2.24</b>	0.40 ± 0.10	0.24 ± 0.10	—	—	6.60 ± 0.15	9.10 ± 0.15	2.24 ± 0.10	7
<b>CI6.6F/6.8/2.65/2.1</b>	0.50 ± 0.10	0.20 ± 0.10	6.20 ± 0.20	—	6.60 ± 0.20	6.80 ± 0.20	2.10 ± 0.10	8
<b>CI6.7/6.7/3.6/3</b>	0.70 ± 0.10	0.35 ± 0.10	5.80 ± 0.15	—	6.70 ± 0.15	6.70 ± 0.15	3.00 ± 0.05	1
<b>CI6.8B/6.8/2.45/1.9</b>	0.35 ± 0.10	0.10 ± 0.10	6.00 ± 0.15	—	6.80 ± 0.15	6.80 ± 0.15	1.90 ± 0.05	9
<b>CI6.85A/9.2/2.2/1.65</b>	0.55 ± 0.10	—	—	—	6.85 ± 0.15	9.20 ± 0.20	1.65 ± 0.05	4

Remark: Customized dimensions are available.

## Type : CI Cores (Power Inductor)

Ordering Code: P47 CI7.0/9.8/4.5/2.2  
 Material トコロウ  
 Core Size 品名

Shape:

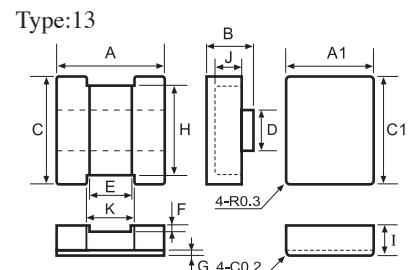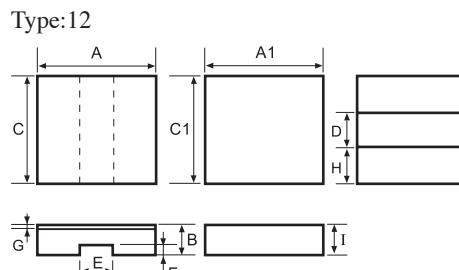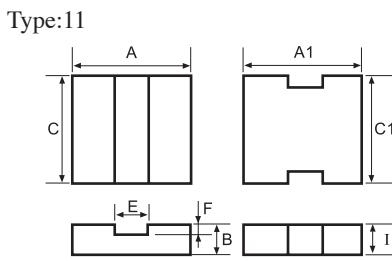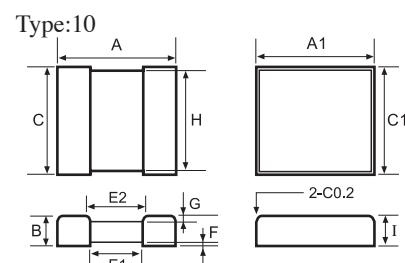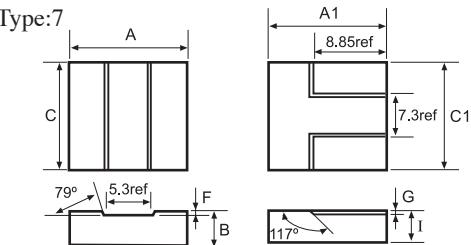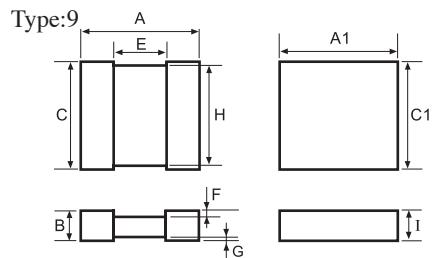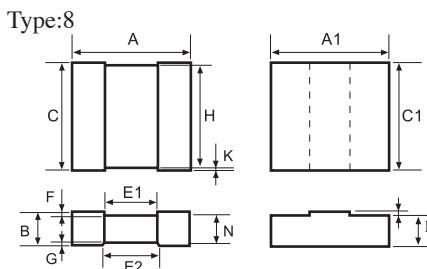

## DIMENSIONS

CORES	DIMENSIONS (mm)						
	A	B	C	D	E	E1	E2
<b>CI7.0/9.8/4.5/2.2</b>	7.00 ± 0.15	4.50 ± 0.10	9.80 ± 0.15	—	—	1.90 ± 0.10	2.70ref
<b>CI7.0/9.9/3.6/2.95</b>	7.00 ± 0.15	3.60 ± 0.15	9.90 ± 0.15	—	—	2.50 ± 0.10	3.00 ± 0.10
<b>CI7.0B/3.6/1.35/0.95</b>	7.00 ± 0.20	1.35 ± 0.10	3.60 ± 0.20	—	5.00 ± 0.20	—	—
<b>CI7.1B/9.95/4.2/2.4</b>	7.10 <sup>+0.10</sup> <sub>-0.16</sub>	4.20 ± 0.10	9.95 ± 0.15	—	—	1.90 ± 0.10	2.50ref
<b>CI7.2A/10.2/4.75/3.75</b>	7.20 ± 0.15	4.75 ± 0.10	10.20 ± 0.20	—	1.08 ± 0.15	—	—
<b>CI7.5/13.3/2.05/1.45</b>	7.50 ± 0.15	2.05 ± 0.10	13.30 ± 0.20	—	4.30 ± 0.15	—	—
<b>CI7.5A/9.0/3.8/3.2</b>	7.50 ± 0.15	3.80 ± 0.10	9.00 ± 0.15	—	—	—	—
<b>CI7.5B/9.5/3.0/3.0</b>	7.50 ± 0.15	3.00 ± 0.10	9.50 ± 0.15	—	—	—	—
<b>CI7.7R/9.8/4.85/2.7</b>	7.70 ± 0.15	4.85 ± 0.10	9.80 ± 0.15	3.80 ± 0.10	2.40 ± 0.10	—	—
<b>CI8.7/9.4/5.3/4.3</b>	8.70 ± 0.15	5.30 ± 0.10	9.40 ± 0.15	—	1.00 ± 0.10	—	—
<b>CI8.7F/10.5/3.75/3</b>	8.70 ± 0.15	3.75 ± 0.10	10.50 ± 0.15	—	2.00 ± 0.10	—	—
<b>CI9.6/11.7/2.9/2.5</b>	9.60 ± 0.15	2.90 ± 0.05	11.70 ± 0.20	—	4.20 ± 0.15	—	—
<b>CI9.9/10.52/4.57/3.81</b>	9.90 ± 0.20	4.57 ± 0.10	10.52 ± 0.20	—	—	2.35 ± 0.10	3.18 ± 0.15
<b>CI10/10/5.2/3.6</b>	10.00 ± 0.15	5.20 ± 0.15	10.00 ± 0.15	6.40 ± 0.15	2.30 ± 0.10	—	—
<b>CI10.52/10.52</b>	10.52 ± 0.20	4.57 ± 0.10	10.52 ± 0.20	—	—	2.35 ± 0.10	3.18 ± 0.10
<b>CI10.7/9.7</b>	10.70 ± 0.20	4.70 ± 0.10	9.70 ± 0.20	—	—	2.50 ± 0.10	2.50 ± 0.10
<b>CI12.68/12.68</b>	12.68 ± 0.15	4.20 ± 0.10	12.68 ± 0.15	—	—	5.69 ± 0.15	6.35ref
<b>CI12.7/13/4.57/3.81</b>	12.70 ± 0.20	4.57 ± 0.10	13.00 ± 0.20	—	—	3.10 ± 0.10	3.98 ± 0.20
<b>CI12.7D/12.7/3.6/3.7</b>	12.70 ± 0.15	3.60 ± 0.10	12.70 ± 0.15	—	—	—	—
<b>CI13/12.5/5.2/3.6</b>	13.00 ± 0.15	5.20 ± 0.15	12.50 ± 0.15	9.30 ± 0.15	3.20 ± 0.10	—	—

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>CI7.0/9.8/4.5/2.2</b>	0.53	13.64	25.98	354.34	2.07
<b>CI7.0/9.9/3.6/2.95</b>	0.53	14.18	26.99	382.83	2.09
<b>CI7.0B/3.6/1.35/0.95</b>	3.92	13.79	3.52	48.57	0.25
<b>CI7.1B/9.95/4.2/2.4</b>	0.56	14.75	26.12	385.48	2.17
<b>CI7.2A/10.2/4.75/3.75</b>	0.43	14.91	34.34	512.16	3.03
<b>CI7.5/13.3/2.05/1.45</b>	0.65	14.10	21.80	307.51	1.51
<b>CI7.5A/9.0/3.8/3.2</b>	0.58	15.09	26.05	393.24	2.21
<b>CI7.5B/9.5/3.0/3.0</b>	0.54	13.99	25.72	359.89	2.04
<b>CI7.7R/9.8/4.85/2.7</b>	0.47	14.41	30.62	441.23	2.38
<b>CI8.7/9.4/5.3/4.3</b>	0.44	16.79	38.25	642.19	3.80
<b>CI8.7F/10.5/3.75/3</b>	0.46	15.40	33.12	510.05	2.88
<b>CI9.6/11.7/2.9/2.5</b>	0.57	17.24	30.30	522.43	2.80
<b>CI9.9/10.52/4.57/3.81</b>	0.47	18.40	38.78	713.55	4.03
<b>CI10/10/5.2/3.6</b>	0.54	19.72	36.57	721.16	3.87
<b>CI10.52/10.52</b>	0.54	21.74	40.00	869.60	4.40
<b>CI10.7/9.7</b>	0.51	19.26	37.90	729.95	4.11
<b>CI12.68/12.68</b>	0.61	23.84	43.19	1029.64	5.38
<b>CI12.7/13/4.57/3.81</b>	0.40	21.52	53.48	1150.89	6.43
<b>CI12.7D/12.7/3.6/3.7</b>	0.51	22.62	44.68	1010.76	5.18
<b>CI13/12.5/5.2/3.6</b>	0.45	22.82	50.59	1154.46	6.53

## ■ DIMENSIONS


CORES	DIMENSIONS (mm)								Type
	F	G	H	J	K	A1	C1	I	
<b>CI7.0/9.8/4.5/2.2</b>	0.80 ± 0.07	0.65 ± 0.07	9.00 ± 0.15	–	–	7.00 ± 0.15	9.80 ± 0.15	2.20 ± 0.10	3
<b>CI7.0/9.9/3.6/2.95</b>	0.50 ± 0.10	0.15 ± 0.08	–	–	–	7.00 ± 0.15	10.00 ± 0.15	2.95 ± 0.10	1
<b>CI7.0B/3.6/1.35/0.95</b>	0.35 ± 0.10	–	–	–	–	7.00 ± 0.20	3.60 ± 0.20	0.95 ± 0.05	4
<b>CI7.1B/9.95/4.2/2.4</b>	0.85 ± 0.07	0.35 ± 0.07	8.80 ± 0.15	–	–	7.15 ± 0.13	10.00 ± 0.13	2.40 ± 0.10	10
<b>CI7.2A/10.2/4.75/3.75</b>	1.08 ± 0.10	–	–	–	–	7.20 ± 0.15	10.20 ± 0.15	3.75 ± 0.05	11
<b>CI7.5/13.3/2.05/1.45</b>	0.37 ± 0.10	0.20 ± 0.10	12.70 ± 0.12	–	–	7.50 ± 0.15	13.30 ± 0.20	1.45 ± 0.05	9
<b>CI7.5A/9.0/3.8/3.2</b>	0.70 ± 0.10	0.40 ± 0.10	–	–	–	7.50 ± 0.15	9.00 ± 0.15	3.20 ± 0.10	7
<b>CI7.5B/9.5/3.0/3.0</b>	0.40 ± 0.10	0.20 ± 0.10	–	–	–	7.50 ± 0.15	9.50 ± 0.15	3.00 ± 0.10	7
<b>CI7.7R/9.8/4.85/2.7</b>	1.00 ± 0.10	0.75 ± 0.08	8.20 ± 0.15	3.10 ± 0.10	2.70 ± 0.10	7.70 ± 0.15	9.80 ± 0.15	2.70 ± 0.10	13
<b>CI8.7/9.4/5.3/4.3</b>	1.00 ± 0.10	–	–	–	–	8.70 ± 0.15	9.40 ± 0.15	4.30 ± 0.05	11
<b>CI8.7F/10.5/3.75/3</b>	0.70 ± 0.10	–	–	–	–	8.70 ± 0.15	10.50 ± 0.15	3.00 ± 0.10	4
<b>CI9.6/11.7/2.9/2.5</b>	0.30 ± 0.10	0.10 ± 0.08	11.00 ± 0.20	–	–	9.60 ± 0.15	11.70 ± 0.20	2.50 ± 0.05	9
<b>CI9.9/10.52/4.57/3.81</b>	0.70 ± 0.10	0.25 ± 0.10	10.00 ± 0.15	–	–	9.90 ± 0.20	10.52 ± 0.20	3.81 ± 0.05	1
<b>CI10/10/5.2/3.6</b>	1.15 ± 0.10	0.65 ± 0.10	1.80 ± 0.15	–	–	10.00 ± 0.15	10.00 ± 0.15	3.60 ± 0.10	12
<b>CI10.52/10.52</b>	0.55 ± 0.05	0.25 ± 0.05	–	–	–	10.82 ± 0.20	10.82 ± 0.20	3.81 ± 0.05	1
<b>CI10.7/9.7</b>	0.70 <sup>+0.10</sup> <sub>-0.07</sub>	0.25 ± 0.05	–	–	–	10.75 ± 0.20	9.75 ± 0.20	3.80 ± 0.10	1
<b>CI12.68/12.68</b>	0.69 ± 0.10	0.15 ± 0.10	12.29 ± 0.15	–	–	12.68 ± 0.15	12.68 ± 0.15	3.38 ± 0.08	1
<b>CI12.7/13/4.57/3.81</b>	0.65 ± 0.10	0.25 ± 0.10	12.50 ± 0.20	–	–	12.70 ± 0.20	13.00 ± 0.20	3.81 ± 0.10	1
<b>CI12.7D/12.7/3.6/3.7</b>	0.40 ± 0.10	0.20 ± 0.10	–	–	–	12.70 ± 0.15	12.70 ± 0.15	3.70 ± 0.10	7
<b>CI13/12.5/5.2/3.6</b>	1.20 ± 0.10	0.50 ± 0.10	1.60 ± 0.15	–	–	13.00 ± 0.15	12.5 ± 0.15	3.60 ± 0.10	12

Remark: Customized dimensions are available.

## Type : EFD Cores (1)

Ordering Code:

P4	EFD6.2	G□
Material 材質	Core Size 品名	Gapped AL Value

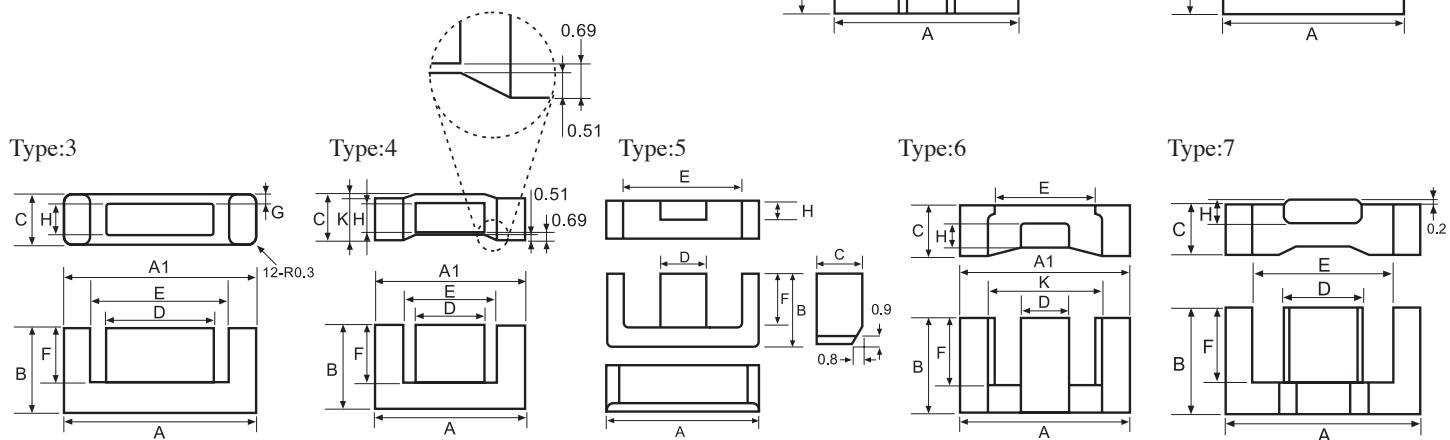

## DIMENSIONS

CORES	DIMENSIONS (mm)										Type
	A	B	C	D	E	F	G	H	K	A-A1	
<b>EFD6.2</b>	$6.25 \pm 0.15$	$3.15 \pm 0.10$	$2.50 \pm 0.10$	$2.50 \pm 0.10$	$4.85 \pm 0.15$	$2.30 \pm 0.10$	-	$1.25 \pm 0.10$	-	$\leq 0.15$	2
<b>EFD6.4</b>	$6.40 \pm 0.15$	$3.70 \pm 0.10$	$2.90 \pm 0.10$	$2.35 \pm 0.10$	$5.30 \pm 0.15$	$2.90 \pm 0.10$	-	$1.40 \pm 0.10$	-	-	2
<b>EFD6.5</b>	$6.50 \pm 0.15$	$3.65 \pm 0.10$	$3.00 \pm 0.10$	$2.50 \pm 0.10$	$5.20 \pm 0.15$	$2.85 \pm 0.10$	-	$1.70 \pm 0.10$	-	-	2
<b>EFD6.5-1</b>	$6.55 \pm 0.15$	$3.65 \pm 0.10$	$3.00 \pm 0.10$	$2.50 \pm 0.10$	$5.25 \pm 0.15$	$2.85 \pm 0.10$	-	$1.70 \pm 0.10$	-	$\leq 0.15$	2
<b>EFD7.5</b>	$7.50 \pm 0.30$	$4.05 \pm 0.15$	$2.30 \pm 0.15$	$2.50 \pm 0.15$	$5.70 \pm 0.20$	$2.75 \pm 0.15$	-	$1.15 \pm 0.15$	-	-	5
<b>EFD8.0</b>	$8.00 \pm 0.15$	$3.70 \pm 0.10$	$1.90 \pm 0.10$	$3.40 \pm 0.10$	5.90 min	$2.30 \pm 0.10$	-	$0.90 \pm 0.10$	-	$\leq 0.15$	2
<b>EFD9.2A</b>	$9.20 \pm 0.20$	$4.50 \pm 0.10$	$1.90 \pm 0.10$	$5.10 \pm 0.15$	$6.60 \pm 0.15$	$3.10 \pm 0.10$	$0.50 \pm 0.10$	$0.90 \pm 0.10$	-	-	3
<b>EFD9.5</b>	$9.60 \pm 0.15$	$4.60 \pm 0.10$	$2.20 \pm 0.10$	$4.00 \pm 0.10$	$7.35 \pm 0.15$	$3.00 \pm 0.10$	-	$1.15 \pm 0.10$	-	$\leq 0.13$	1
<b>EFD9.7A</b>	$9.70 \pm 0.15$	$4.30 \pm 0.10$	$3.00 \pm 0.10$	$4.00 \pm 0.10$	$7.70 \pm 0.15$	$3.10 \pm 0.10$	-	$1.50 \pm 0.07$	-	$\leq 0.13$	2
<b>EFD9.8</b>	$9.80 \pm 0.15$	$9.80 \pm 0.10$	$2.50 \pm 0.10$	$4.50 \pm 0.10$	$7.40 \pm 0.15$	$7.80 \pm 0.10$	-	$1.31 \pm 0.10$	-	$\leq 0.15$	2
<b>EFD10.7</b>	$10.70 \pm 0.20$	$6.50 \pm 0.10$	$3.50 \pm 0.15$	$3.20 \pm 0.10$	$8.30 \pm 0.15$	$5.15 \pm 0.10$	-	$1.50 \pm 0.10$	-	-	2
<b>EFD11.2A</b>	$11.20^{+0.20}_{-0.25}$	$5.70 \pm 0.12$	$2.70 \pm 0.20$	$4.90^{+0.10}_{-0.15}$	$8.70 \pm 0.20$	$3.95 \pm 0.10$	-	$1.40^{+0.10}_{-0.15}$	-	-	2
<b>EFD11.3</b>	$11.30 \pm 0.20$	$6.70 \pm 0.20$	$3.50 \pm 0.15$	$3.20 \pm 0.15$	8.50 min	$5.20 \pm 0.10$	-	$1.50 \pm 0.10$	-	-	2
<b>EFD11.7/13.6</b>	$11.75 \pm 0.15$	$13.60 \pm 0.15$	$2.38 \pm 0.15$	$5.00 \pm 0.10$	$8.65 \pm 0.15$	$11.60 \pm 0.10$	-	$1.50 \pm 0.10$	-	$\leq 0.20$	2
<b>EFD12.2A</b>	$12.20 \pm 0.25$	$7.60 \pm 0.20$	$3.50 \pm 0.15$	$3.30 \pm 0.15$	$9.80 \pm 0.25$	$6.35 \pm 0.15$	-	$2.00 \pm 0.15$	-	$\leq 0.25$	2
<b>EFD12A/3.5</b>	$12.00 \pm 0.20$	$7.70 \pm 0.15$	$3.50 \pm 0.15$	$3.20 \pm 0.10$	9.35 min	$6.30 \pm 0.15$	-	$1.50 \pm 0.10$	-	$\leq 0.15$	2
<b>EFD12.4B</b>	$12.40^{+0.30}_{-0.20}$	$6.05 \pm 0.20$	$4.00 \pm 0.10$	$5.15 \pm 0.15$	9.70 min	$4.60 \pm 0.15$	-	$2.20 \pm 0.10$	-	-	2
<b>EFD12.45</b>	$12.45 \pm 0.25$	$6.20 \pm 0.15$	$3.90 \pm 0.08$	$5.80 \pm 0.12$	$7.75 \pm 0.15$	$4.05 \pm 0.10$	-	$2.55 \pm 0.05$	$3.50 \pm 0.06$	-	4
<b>EFD12.5A</b>	$12.50 \pm 0.30$	$6.20 \pm 0.10$	$3.50 \pm 0.10$	$5.40 \pm 0.15$	9.00 min	$4.55 \pm 0.15$	-	$2.00 \pm 0.20$	-	-	7
<b>EFD12.7</b>	$12.75 \pm 0.25$	$6.85 \pm 0.15$	$3.30 \pm 0.15$	$6.00 \pm 0.10$	$9.35 \pm 0.15$	$4.55 \pm 0.15$	-	$1.85 \pm 0.10$	-	$\leq 0.20$	2
<b>EFD12.7A</b>	$12.70 \pm 0.20$	$10.60 \pm 0.15$	$5.40 \pm 0.15$	$4.50^{+0.10}_{-0.15}$	$8.90^{+0.20}_{-0.10}$	$8.20 \pm 0.15$	-	$3.50 \pm 0.10$	-	$\leq 0.15$	2
<b>EFD13</b>	$13.20 \pm 0.35$	$6.85 \pm 0.15$	$2.85 \pm 0.15$	$5.25 \pm 0.15$	$9.60^{+0.15}_{-0.25}$	$4.80 \pm 0.15$	-	$1.40 \pm 0.10$	-	$\leq 0.30$	1
<b>EFD13D</b>	$13.00 \pm 0.30$	$6.40 \pm 0.20$	$4.00 \pm 0.20$	$5.30 \pm 0.20$	10.00 min	$4.85 \pm 0.20$	-	$2.15 \pm 0.15$	-	-	2
<b>EFD13.3</b>	$13.35 \pm 0.25$	$5.65 \pm 0.15$	$3.80 \pm 0.15$	$6.65 \pm 0.15$	$10.00 \pm 0.20$	$3.80 \pm 0.20$	-	$1.65 \pm 0.10$	$10.40 \pm 0.20$	$\leq 0.30$	6
<b>EFD13.5A</b>	$13.50^{+0.20}_{-0.15}$	$11.00^{+0.15}_{-0.10}$	$4.50 \pm 0.10$	$5.30 \pm 0.10$	9.80 min	$8.55 \pm 0.10$	-	$3.00 \pm 0.10$	-	$\leq 0.20$	2
<b>EFD13.5B</b>	$13.50^{+0.20}_{-0.15}$	$11.55^{+0.15}_{-0.10}$	$3.80 \pm 0.10$	$5.30 \pm 0.10$	9.80 min	$9.05 \pm 0.10$	-	$2.70 \pm 0.10$	-	$\leq 0.20$	2
<b>EFD13.8</b>	$14.00 \pm 0.35$	$8.65 \pm 0.15$	$3.35 \pm 0.15$	$5.60 \pm 0.15$	$10.60 \pm 0.30$	$6.45^{+0.15}_{-0.10}$	-	$1.60 \pm 0.10$	-	$\leq 0.20$	1

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>EFD6.2</b>	4.47	14.26	3.19	45.49	0.27
<b>EFD6.4</b>	5.11	17.05	3.34	56.91	0.30
<b>EFD6.5</b>	4.25	16.77	3.95	66.24	0.38
<b>EFD6.5-1</b>	4.26	16.82	3.95	66.44	0.39
<b>EFD7.5</b>	4.98	17.15	3.44	59.07	0.40
<b>EFD8.0</b>	4.85	15.95	3.29	52.48	0.38
<b>EFD9.2A</b>	4.27	18.80	4.40	82.70	0.52
<b>EFD9.5</b>	4.06	20.10	4.80	97.50	0.56
<b>EFD9.7A</b>	2.71	19.53	7.21	140.76	0.80
<b>EFD9.8</b>	6.54	39.64	6.06	240.22	1.30
<b>EFD10.7</b>	4.87	28.02	5.75	161.12	1.14
<b>EFD11.2A</b>	3.60	25.05	6.96	174.40	0.98
<b>EFD11.3</b>	4.60	28.40	6.18	175.50	0.92
<b>EFD11.7/13.6</b>	7.57	56.28	7.43	418.16	2.10
<b>EFD12.2A</b>	3.94	32.29	8.19	264.46	1.50
<b>EFD12A/3.5</b>	5.47	33.18	6.07	201.38	1.34
<b>EFD12.4B</b>	2.61	27.88	10.68	297.89	1.64
<b>EFD12.45</b>	1.66	25.60	15.40	394.20	2.10
<b>EFD12.5A</b>	2.47	27.46	11.10	304.81	1.50
<b>EFD12.7</b>	2.57	28.68	11.13	319.20	1.80
<b>EFD12.7A</b>	2.42	43.33	17.93	776.91	4.39
<b>EFD13</b>	3.57	29.28	8.18	239.50	1.53
<b>EFD13D</b>	2.69	30.58	11.37	347.70	1.53
<b>EFD13.3</b>	2.15	25.10	11.65	292.42	1.64
<b>EFD13.5A</b>	2.78	45.97	16.54	760.34	4.04
<b>EFD13.5B</b>	3.33	48.03	14.44	693.55	3.62
<b>EFD13.8</b>	3.75	36.98	9.84	363.80	2.04

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )								AL + 40% - 30% (nH/N <sup>2</sup> )				
	P4	P41	P45	P451	P452	P47	P48	P61	A05	A07	A10(L)	A121(L)	A151(L)
<b>EFD6.2</b>	390	345											
<b>EFD6.4</b>	400												
<b>EFD6.5</b>	400												
<b>EFD6.5-1</b>	380	370											
<b>EFD7.5</b>													
<b>EFD8.0</b>	360	355	375			370							
<b>EFD9.2A</b>	440												
<b>EFD9.5</b>	460												
<b>EFD9.7A</b>						500							
<b>EFD9.8</b>	300												
<b>EFD10.7</b>										800	1900		
<b>EFD11.2A</b>													
<b>EFD11.3</b>										1000			
<b>EFD11.7/13.6</b>	340												
<b>EFD12.2A</b>										1050			
<b>EFD12A/3.5</b>										767			
<b>EFD12.4B</b>	800												
<b>EFD12.45</b>	1200												
<b>EFD12.5A</b>	750	720				840		330					
<b>EFD12.7</b>	950	830				960					4000		
<b>EFD12.7A</b>	940					1000							
<b>EFD13</b>	600					640							
<b>EFD13D</b>						1000							
<b>EFD13.3</b>	900	810	980			950							
<b>EFD13.5A</b>	890												
<b>EFD13.5B</b>	750												
<b>EFD13.8</b>	600												

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.


## Type : EFD Cores (2)

Ordering Code:


P4	EFD15A	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:


Type:1




Type:2




Type:3




Type:4

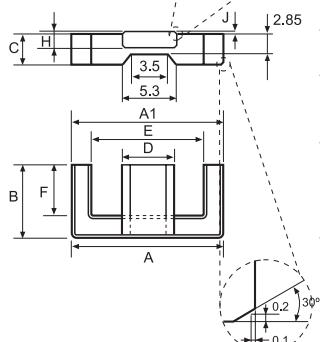


Type:5

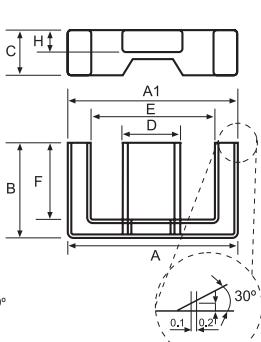

Type:6

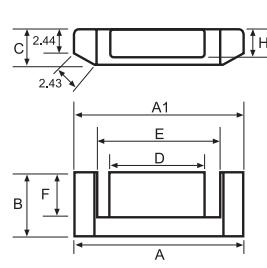

Type:7

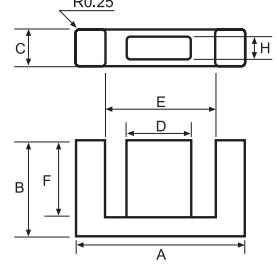

### DIMENSIONS

CORES	DIMENSIONS (mm)									Type
	A	B	C	D	E	F	H	K	A-A1	
<b>EFD14.6</b>	14.60 ± 0.30	7.30 ± 0.15	6.20 ± 0.15	5.30 ± 0.15	11.00 ± 0.35	5.30 ± 0.25	4.24 ± 0.10	—	≤ 0.20	2
<b>EFD14.7/4.75</b>	14.70 ± 0.30	12.70 ± 0.15	4.75 ± 0.15	6.00 ± 0.15	10.45 ± 0.15	10.00 <sup>+0.15</sup> <sub>-0.10</sub>	3.30 ± 0.10	—	≤ 0.25	2
<b>EFD14.8</b>	14.80 ± 0.60	9.00 ± 0.20	6.80 ± 0.20	5.60 ± 0.20	11.10 ± 0.30	6.15 ± 0.10	4.60 ± 0.20	—	≤ 0.30	2
<b>EFD14.8B</b>	14.80 ± 0.30	10.00 ± 0.15	4.60 ± 0.10	6.00 ± 0.15	11.05 ± 0.15	7.80 <sup>+0.13</sup> <sub>-0.12</sub>	2.70 ± 0.10	—	≤ 0.25	2
<b>EFD15A</b>	15.00 ± 0.40	7.50 ± 0.15	4.65 ± 0.15	5.30 ± 0.15	11.00 ± 0.25	5.50 <sup>+0.25</sup> <sub>-0.10</sub>	2.40 ± 0.10	—	≤ 0.15	4
<b>EFD15C/4.2</b>	15.00 <sup>+0.25</sup> <sub>-0.15</sub>	14.45 <sup>+0.15</sup> <sub>-0.10</sub>	4.20 <sup>+0.08</sup> <sub>-0.07</sub>	5.80 ± 0.07	10.60 ± 0.15	12.15 ± 0.10	2.90 ± 0.07	—	—	2
<b>EFD15D</b>	15.00 <sup>+0.25</sup> <sub>-0.15</sub>	14.35 <sup>+0.15</sup> <sub>-0.10</sub>	4.00 <sup>+0.08</sup> <sub>-0.07</sub>	5.80 ± 0.07	10.60 ± 0.15	12.05 ± 0.10	2.70 ± 0.07	—	≤ 0.15	2
<b>EFD15E</b>	15.00 ± 0.25	14.95 ± 0.15	4.00 ± 0.10	5.80 ± 0.10	10.60 ± 0.15	12.65 ± 0.15	2.70 ± 0.10	—	—	2
<b>EFD15H</b>	15.00 ± 0.40	7.50 ± 0.15	4.50 ± 0.15	5.30 ± 0.15	11.00 ± 0.25	5.50 <sup>+0.25</sup> <sub>-0.10</sub>	2.15 ± 0.10	—	≤ 0.25	5
<b>EFD15Q</b>	15.00 ± 0.25	4.55 ± 0.15	5.00 ± 0.15	6.50 ± 0.20	10.30 ± 0.30	2.75 ± 0.15	2.60 ± 0.15	—	—	7
<b>EFD15.3</b>	15.00 ± 0.30	6.45 ± 0.05	3.70 ± 0.10	7.90 ± 0.10	11.25 ± 0.25	4.73 ± 0.10	1.60 ± 0.10	12.05 ± 0.25	≤ 0.20	3
<b>EFD15.3A</b>	15.35 ± 0.25	6.55 ± 0.15	3.70 ± 0.15	8.05 ± 0.20	11.70 ± 0.30	4.50 ± 0.15	1.60 ± 0.10	12.50 ± 0.30	—	3
<b>EFD16</b>	16.00 ± 0.25	15.10 <sup>+0.15</sup> <sub>-0.10</sub>	4.00 ± 0.15	5.80 ± 0.10	12.00 ± 0.15	12.70 ± 0.10	2.70 ± 0.10	—	≤ 0.25	2
<b>EFD16A</b>	16.00 ± 0.30	7.20 ± 0.20	4.80 ± 0.20	6.00 ± 0.25	12.50 ± 0.30	5.10 ± 0.20	2.40 ± 0.20	—	—	2
<b>EFD16B</b>	16.00 ± 0.25	15.30 ± 0.20	4.00 ± 0.15	5.50 ± 0.15	10.20min	12.30 ± 0.20	3.00 ± 0.13	—	—	6
<b>EFD16.5</b>	16.55 ± 0.25	19.40 ± 0.25	4.45 ± 0.10	5.80 ± 0.20	11.40min	16.45 <sup>+0.20</sup> <sub>-0.15</sub>	2.80 ± 0.10	—	≤ 0.20	1
<b>EFD16.5/17</b>	16.55 ± 0.25	17.00 ± 0.25	4.45 ± 0.10	5.80 ± 0.20	11.40min	14.05 <sup>+0.20</sup> <sub>-0.15</sub>	2.80 ± 0.10	—	—	2
<b>EFD16.5/50</b>	16.55 ± 0.25	25.00 ± 0.15	4.45 ± 0.15	5.80 ± 0.15	11.40min	22.00 <sup>+0.20</sup> <sub>-0.15</sub>	2.80 ± 0.10	—	—	1
<b>EFD17.6</b>	17.60 ± 0.30	11.00 ± 0.20	5.60 ± 0.15	7.50 ± 0.15	13.10min	8.60 ± 0.20	3.40 ± 0.10	—	≤ 0.25	2
<b>EFD18</b>	18.00 ± 0.30	11.20 ± 0.15	2.00 ± 0.10	9.00 ± 0.15	13.20 ± 0.30	7.90 ± 0.15	0.90 ± 0.10	—	≤ 0.20	2
<b>EFD18.5</b>	18.50 ± 0.50	19.90 ± 0.20	4.05 ± 0.25	7.60 ± 0.20	14.50 ± 0.50	17.80 ± 0.20	2.11 ± 0.15	—	≤ 0.30	2
<b>EFD18.5/3.7</b>	18.50 ± 0.30	15.30 ± 0.20	3.70 ± 0.25	7.60 ± 0.20	14.50 ± 0.30	13.10 ± 0.20	1.80 ± 0.15	—	—	1
<b>EFD19.5</b>	19.50 ± 0.35	21.40 ± 0.20	5.45 ± 0.15	5.80 ± 0.15	13.50min	18.20 ± 0.15	4.00 ± 0.15	—	—	2

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>EFD14.6</b>	1.53	33.45	21.84	730.50	4.08
<b>EFD14.7/4.75</b>	2.61	52.61	20.16	1060.62	5.50
<b>EFD14.8</b>	1.42	37.89	26.65	1009.77	5.80
<b>EFD14.8B</b>	2.55	43.26	16.91	731.34	4.00
<b>EFD15A</b>	2.35	33.61	14.87	499.78	2.74
<b>EFD15C/4.2</b>	3.73	60.69	16.27	987.24	5.18
<b>EFD15D</b>	3.30	60.19	16.62	1000.36	7.00
<b>EFD15E</b>	3.85	62.68	16.27	1020.15	5.26
<b>EFD15H</b>	2.03	29.88	14.70	439.24	2.75
<b>EFD15Q</b>	1.20	21.21	17.73	376.18	2.36
<b>EFD15.3</b>	2.49	28.58	11.44	326.95	1.90
<b>EFD15.3A</b>	2.25	29.11	12.96	377.27	2.80
<b>EFD16</b>	4.10	64.37	15.70	1010.61	5.18
<b>EFD16A</b>	2.24	33.48	14.97	501.35	3.10
<b>EFD16B</b>	3.57	62.64	17.55	1099.42	5.80
<b>EFD16.5</b>	4.18	78.03	18.67	1456.82	8.00
<b>EFD16.5/17</b>	3.73	69.18	18.53	1281.91	7.34
<b>EFD16.5/50</b>	5.42	100.87	18.62	1878.20	8.00
<b>EFD17.6</b>	2.03	48.36	23.84	1152.90	6.12
<b>EFD18</b>	5.30	45.54	8.59	391.10	2.46
<b>EFD18.5</b>	5.51	85.28	15.46	1318.43	7.14
<b>EFD18.5/3.7</b>	4.77	66.84	14.02	937.08	4.82
<b>EFD19.5</b>	3.37	88.71	26.32	2335.22	13.08

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )									AL + 40% - 30% (nH/N <sup>2</sup> )			
	P4	P41	P45	P451	P452	P47	P48	P61	A05	A07	A10(L)	A121(L)	A151(L)
<b>EFD14.6</b>	1000										4285		
<b>EFD14.7/4.75</b>	950												
<b>EFD14.8</b>	1400		1650			1600							
<b>EFD14.8B</b>	820												
<b>EFD15A</b>	780 ± 30% 20%	760 ± 30% 20%	1000			990 ± 30% 20%	780 ± 30% 20%	430	1400	1820	2540min		3810min
<b>EFD15C/4.2</b>	700												
<b>EFD15D</b>	700												
<b>EFD15E</b>	680												
<b>EFD15H</b>	740										2800min	3200min	
<b>EFD15Q</b>						1570							
<b>EFD15.3</b>	850					950							
<b>EFD15.3A</b>	800					900							
<b>EFD16</b>	640												
<b>EFD16A</b>	1020												
<b>EFD16B</b>						750							
<b>EFD16.5</b>	678												
<b>EFD16.5/17</b>	700												
<b>EFD16.5/50</b>	590												
<b>EFD17.6</b>	1200												
<b>EFD18</b>	500												
<b>EFD18.5</b>	500												
<b>EFD18.5/3.7</b>	650 (ref)												
<b>EFD19.5</b>	950												


Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : EFD Cores (3)

Ordering Code:	P4	EFD20	G□
Material 材質		Core Size 品名	Gapped AL Value

Shape:

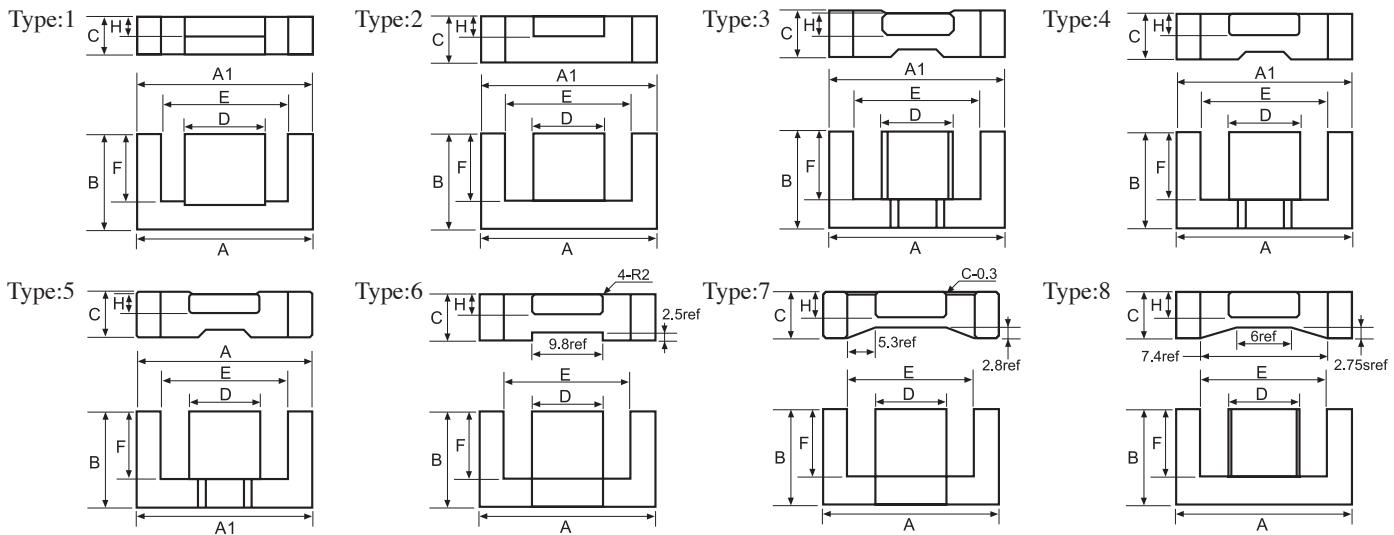

## DIMENSIONS

CORES	DIMENSIONS (mm)								Type
	A	B	C	D	E	F	H	A-A1	
<b>EFD20</b>	20.00 ± 0.55	10.00 ± 0.15	6.65 ± 0.15	8.90 ± 0.20	15.40 ± 0.50	7.70 ± 0.25	3.60 ± 0.15	≤ 0.25	3
<b>EFD20A</b>	20.00 ± 0.55	11.60 ± 0.15	6.00 ± 0.15	8.90 ± 0.20	15.40 ± 0.20	9.30 ± 0.25	3.60 ± 0.15	≤ 0.20	3
<b>EFD20B</b>	20.00 ± 0.55	11.60 ± 0.15	5.40 ± 0.15	8.90 ± 0.20	15.40 ± 0.20	9.30 ± 0.25	3.60 ± 0.15	≤ 0.20	4
<b>EFD20D</b>	20.50 ± 0.40	10.00 ± 0.25	6.65 ± 0.15	8.90 ± 0.20	15.90 ± 0.30	7.70 ± 0.20	3.60 ± 0.15	≤ 0.20	4
<b>EFD20E</b>	20.00 ± 0.30	13.30 ± 0.20	5.80 ± 0.12	8.90 ± 0.20	15.40 ± 0.20	11.00 ± 0.20	3.50 ± 0.12	≤ 0.20	2
<b>EFD20.3</b>	20.30 ± 0.50	10.20 ± 0.15	6.00 ± 0.15	8.90 ± 0.20	15.70 ± 0.20	7.90 ± 0.20	3.60 ± 0.15	≤ 0.30	3
<b>EFD20.6</b>	20.60 ± 0.50	10.20 ± 0.15	6.60 ± 0.15	8.90 ± 0.20	16.70 ± 0.40	8.00 ± 0.15	3.70 ± 0.15	—	3
<b>EFD20.7</b>	20.70 ± 0.60	12.30 ± 0.20	4.15 ± 0.20	10.20 ± 0.25	15.80 ± 0.50	9.20 ± 0.20	2.05 ± 0.15	—	2
<b>EFD21.4</b>	21.40 ± 0.30	12.60 ± 0.20	6.00 ± 0.15	9.50 ± 0.15	16.10min	10.00 ± 0.20	3.40 ± 0.10	≤ 0.25	2
<b>EFD21.5</b>	21.50 ± 0.40	20.50 ± 0.20	4.65 ± 0.15	8.20 ± 0.15	14.20min	17.55 ± 0.15	2.90 ± 0.10	—	1
<b>EFD22</b>	22.00 ± 0.30	14.50 ± 0.15	7.40 ± 0.15	9.60 ± 0.15	16.00 ± 0.30	11.50 ± 0.15	4.20 ± 0.15	≤ 0.25	4
<b>EFD22A</b>	22.00 ± 0.50	16.30 ± 0.40	4.36 ± 0.25	10.00 ± 0.20	16.90 ± 0.50	13.90min	1.91 ± 0.15	≤ 0.30	2
<b>EFD22.5A</b>	22.50 ± 0.60	12.00 ± 0.20	4.00 ± 0.20	11.00 ± 0.25	17.00 ± 0.40	9.35 ± 0.20	1.90 ± 0.15	—	2
<b>EFD23.6</b>	23.60 ± 0.40	14.40 ± 0.20	4.00 ± 0.20	11.00 ± 0.25	17.70min	11.60 ± 0.20	1.90 ± 0.20	—	2
<b>EFD25</b>	25.00 ± 0.65	12.50 ± 0.15	9.10 ± 0.20	11.40 ± 0.20	18.70 ± 0.60	9.30 ± 0.25	5.20 ± 0.15	≤ 0.30	3
<b>EFD25A</b>	25.05 ± 0.65	12.60 ± 0.20	12.45 ± 0.25	8.80 ± 0.25	19.20 ± 0.40	9.55 ± 0.25	8.30 ± 0.30	—	2
<b>EFD25B</b>	25.00 ± 0.65	12.50 ± 0.15	9.10 ± 0.20	11.40 ± 0.20	18.70 ± 0.60	9.30 ± 0.25	5.20 ± 0.15	—	3
<b>EFD25F</b>	25.20 ± 0.50	12.90 ± 0.20	9.10 ± 0.20	11.40 ± 0.20	18.50min	9.70 ± 0.20	5.30 ± 0.15	≤ 0.30	5
<b>EFD25.4</b>	25.40 ± 0.70	15.85 ± 0.20	10.50 ± 0.30	9.80 ± 0.30	19.50min	12.35 ± 0.15	6.10 ± 0.20	—	6
<b>EFD26.3</b>	26.30 ± 0.50	12.70 ± 0.20	9.10 ± 0.20	11.30 ± 0.20	20.00min	9.50 ± 0.20	5.15 ± 0.15	—	5
<b>EFD28.7</b>	28.70 ± 0.40	14.90 ± 0.25	2.45 ± 0.10	14.80 ± 0.15	21.50 ± 0.35	11.30 ± 0.20	1.20 ± 0.10	≤ 0.30	2
<b>EFD29.7</b>	29.70 ± 0.80	16.80 ± 0.30	12.50 ± 0.40	11.60 ± 0.30	22.20 ± 0.30	12.30 ± 0.30	8.20 ± 0.20	—	7
<b>EFD30A</b>	30.00 ± 0.50	15.00 ± 0.20	9.10 ± 0.30	14.60 ± 0.30	22.40min	11.20 ± 0.20	4.90 ± 0.25	—	3
<b>EFD30.8</b>	30.80 ± 0.50	15.20 ± 0.25	8.60 ± 0.20	14.60 ± 0.30	22.20min	11.40 ± 0.20	4.84 ± 0.15	—	8
<b>EFD31</b>	31.00 ± 0.45	18.00 ± 0.25	6.50 ± 0.20	14.00 ± 0.25	21.90 ± 0.40	13.50 ± 0.25	3.90 ± 0.20	—	2
<b>EFD31.2</b>	31.20 ± 0.50	15.25 ± 0.15	9.00 ± 0.20	14.40 ± 0.25	23.20 ± 0.40	11.30 ± 0.15	4.90 ± 0.15	—	3
<b>EFD31.2B</b>	31.20 ± 0.50	15.20 ± 0.20	9.00 ± 0.20	14.60 ± 0.30	23.80min	11.40 ± 0.20	4.90 ± 0.20	—	5
<b>EFD31.4</b>	31.40 ± 0.50	15.00 ± 0.20	9.10 ± 0.20	14.60 ± 0.25	23.40min	11.30 ± 0.20	4.90 ± 0.15	—	3
<b>EFD31.4A</b>	31.40 ± 0.60	15.50 ± 0.30	9.00 ± 0.20	14.60 ± 0.25	24.60min	11.70 ± 0.20	4.90 ± 0.20	—	5
<b>FFD31.8</b>	31.80 ± 0.50	22.00 ± 0.15	5.10 ± 0.20	15.35 ± 0.40	21.60min	17.00 ± 0.15	3.15 ± 0.15	≤ 0.40	2

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>EFD20</b>	1.59	45.49	28.50	1296.40	6.88
<b>EFD20A</b>	1.89	51.76	27.27	1411.49	7.66
<b>EFD20B</b>	2.00	51.46	25.64	1319.43	6.94
<b>EFD20D</b>	1.61	45.97	28.42	1306.40	6.90
<b>EFD20E</b>	2.19	58.48	26.65	1558.49	6.88
<b>EFD20.3</b>	1.72	46.02	27.88	1283.06	7.00
<b>EFD20.6</b>	1.78	47.40	26.59	1260.14	6.80
<b>EFD20.7</b>	2.53	52.78	20.84	1099.77	6.28
<b>EFD21.4</b>	1.88	55.76	29.66	1653.84	9.24
<b>EFD21.5</b>	3.16	84.57	26.75	2262.25	12.40
<b>EFD22</b>	1.57	62.52	39.94	2497.05	13.90
<b>EFD22A</b>	3.66	70.97	19.41	1377.87	7.67
<b>EFD22.5A</b>	2.53	54.00	21.30	1150.20	6.14
<b>EFD23.6</b>	3.02	63.32	20.97	1328.00	7.50
<b>EFD25</b>	1.03	55.81	53.92	3009.20	16.12
<b>EFD25A</b>	0.80	59.00	74.00	4370.00	22.40
<b>EFD25B</b>	1.04	55.81	53.92	3009.28	16.12
<b>EFD25F</b>	0.98	56.51	57.63	3257.12	17.64
<b>EFD25.4</b>	1.14	70.32	61.44	4320.46	18.56
<b>EFD26.3</b>	1.05	57.80	54.83	3169.59	16.20
<b>EFD28.7</b>	4.03	65.02	16.10	1046.82	6.06
<b>EFD29.7</b>	0.77	73.74	96.33	7103.37	35.70
<b>EFD30A</b>	0.98	66.02	67.52	4457.67	24.00
<b>EFD30.8</b>	0.98	66.73	68.13	4546.31	23.72
<b>EFD31</b>	1.44	77.23	53.56	4135.91	23.00
<b>EFD31.2</b>	0.99	67.85	68.52	4649.28	24.28
<b>EFD31.2B</b>	1.03	68.23	66.27	4521.52	25.24
<b>EFD31.4</b>	1.07	67.72	63.48	4298.64	25.40
<b>EFD31.4A</b>	1.11	69.62	62.71	4366.06	23.50
<b>EFD31.8</b>	1.91	91.32	47.77	4362.36	23.26

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )								AL + 40% - 30% (nH/N <sup>2</sup> )			
	P4	P41	P45	P451	P452	P47	P48	P61	A05	A07	A10(L)	A121(L)
<b>EFD20</b>	1200 <sup>+30%</sup> -20%	1200 <sup>+30%</sup> -20%	1650			1600	1200 <sup>+30%</sup> -20%	550		2800	5700 ± 30%	4500min
<b>EFD20A</b>	1085											
<b>EFD20B</b>	1085					1250						
<b>EFD20D</b>	1200	1160	1550			1500				3000		
<b>EFD20E</b>	1200	1100										
<b>EFD20.3</b>	1150											
<b>EFD20.6</b>	1390											
<b>EFD20.7</b>	800											
<b>EFD21.4</b>	1300											
<b>EFD21.5</b>	960											
<b>EFD22</b>	1600	1550										
<b>EFD22A</b>	620											
<b>EFD22.5A</b>						950						
<b>EFD23.6</b>		850										
<b>EFD25</b>	2000 <sup>+30%</sup> -20%	1930	2500			2400	2000 <sup>+30%</sup> -20%		4400	5480	9000 ± 30%	
<b>EFD25A</b>						3300 <sup>+30%</sup> -20%						
<b>EFD25B</b>	2000					2400						
<b>EFD25F</b>	2100											
<b>EFD25.4</b>	2000					2350	2000					
<b>EFD26.3</b>	2480											
<b>EFD28.7</b>	650											
<b>EFD29.7</b>	3000	2850	3700			3640						
<b>EFD30A</b>	2300	2200	2750			2700	2300					
<b>EFD30.8</b>							2700					
<b>EFD31</b>	1800											
<b>EFD31.2</b>	2700											
<b>EFD31.2B</b>	2150											
<b>EFD31.4</b>	2200											
<b>EFD31.4A</b>	2400											
<b>EFD31.8</b>	1500											

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10T<sub>s</sub>. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.


## Type : EFD Cores (4)

Ordering Code:


P4	EFD35	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:


Type:1

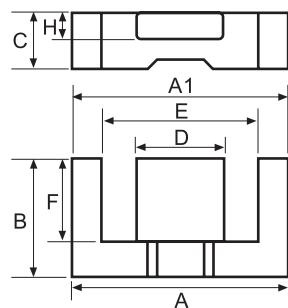

Type:2

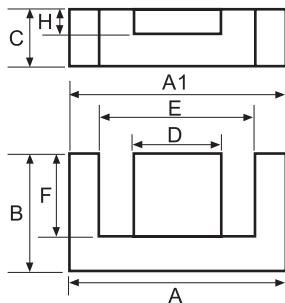

Type:3

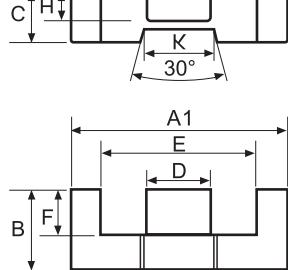

## DIMENSIONS

CORES	DIMENSIONS (mm)								Type
	A	B	C	D	E	F	H	A-A1	
<b>EFD33.7</b>	33.70 ± 0.50	23.00 ± 0.15	5.00 ± 0.15	17.00 ± 0.20	23.70 ± 0.45	18.00 ± 0.15	3.00 ± 0.10	—	2
<b>EFD34.8</b>	34.80 ± 0.50	22.40 ± 0.20	5.40 ± 0.15	16.50 ± 0.25	24.20min	16.90 ± 0.20	3.00 ± 0.15	≤ 0.50	2
<b>EFD35</b>	35.00 ± 0.50	25.30 ± 0.20	5.70 ± 0.15	15.35 ± 0.25	24.70 ± 0.30	20.00 ± 0.20	3.80 ± 0.15	—	2
<b>EFD35A</b>	35.00 ± 0.50	13.90 ± 0.20	6.30 ± 0.25	18.00 ± 0.40	25.30min	9.50 ± 0.20	3.20 ± 0.20	—	1
<b>EFD35.4</b>	35.40 ± 0.50	25.60 ± 0.20	6.00 ± 0.20	15.30 ± 0.25	25.00min	20.30 ± 0.20	4.20 ± 0.15	—	2
<b>EFD35.4A</b>	35.40 ± 0.50	23.10 ± 0.20	6.00 ± 0.20	15.30 ± 0.25	25.50 ± 0.40	17.80 ± 0.15	4.20 ± 0.15	≤ 0.60	2
<b>EFD35.5</b>	35.50 ± 0.80	17.75 ± 0.20	6.80 ± 0.20	16.20 ± 0.30	26.20 ± 0.60	13.10 ± 0.20	3.90 ± 0.15	—	2
<b>EFD36</b>	36.00 ± 0.50	18.90 ± 0.20	7.40 ± 0.15	17.60 ± 0.20	26.20 ± 0.50	13.80 ± 0.15	4.00 ± 0.15	—	2
<b>EFD36.1</b>	36.10 ± 0.55	17.80 ± 0.20	13.00 ± 0.30	10.00 ± 0.30	25.10min	12.80 ± 0.20	10.00 ± 0.30	—	3
<b>EFD36.25</b>	36.25 ± 0.50	24.00 ± 0.15	10.00 ± 0.20	14.00 ± 0.20	26.00min	19.00 ± 0.20	5.00 ± 0.20	—	2
<b>EFD37.7</b>	37.70 ± 0.50	17.60 ± 0.20	7.60 ± 0.20	18.60 ± 0.25	29.50 ± 0.40	13.10 ± 0.15	3.40 ± 0.15	—	2
<b>EFD37.7A</b>	37.70 ± 0.80	17.60 ± 0.20	7.60 ± 0.20	18.60 ± 0.25	29.60min	13.10 ± 0.15	3.40 ± 0.15	—	2
<b>EFD37.8</b>	37.80 ± 0.50	29.00 ± 0.20	5.50 ± 0.20	13.80 ± 0.20	22.40 ± 0.45	21.60 ± 0.20	4.00 ± 0.15	—	2
<b>EFD40.2</b>	40.20 ± 0.50	24.70 ± 0.20	6.10 ± 0.20	20.00 ± 0.30	29.30 ± 0.60	18.00 ± 0.20	3.00 ± 0.15	—	2
<b>EFD41</b>	41.00 ± 0.80	20.30 ± 0.20	11.80 ± 0.30	16.60 ± 0.40	31.40 ± 0.70	15.50 ± 0.20	6.70 ± 0.25	≤ 0.60	2
<b>EFD42.9</b>	42.90 ± 0.70	24.40 ± 0.15	6.60 ± 0.15	21.60 ± 0.30	27.80min	17.00 ± 0.15	4.40 ± 0.15	—	2
<b>EFD43</b>	43.00 ± 0.60	26.30 ± 0.25	7.55 ± 0.20	21.60 ± 0.30	29.40 ± 0.60	18.80 ± 0.25	4.30 ± 0.20	—	2
<b>EFD43.1</b>	43.10 ± 0.65	22.15 ± 0.20	8.00 ± 0.15	22.30 ± 0.30	33.10 ± 0.65	17.15 ± 0.20	3.50 ± 0.15	—	2
<b>EFD43.4</b>	43.40 ± 0.60	22.10 ± 0.20	8.00 ± 0.30	22.45 ± 0.25	33.50min	17.00 ± 0.20	3.20 ± 0.15	—	2
<b>EFD43.7</b>	43.70 ± 0.70	27.60 ± 0.15	6.20 ± 0.25	20.30 ± 0.30	29.50min	20.60 ± 0.15	4.00 ± 0.15	—	2
<b>EFD43.7A</b>	43.70 ± 0.70	28.50 ± 0.15	6.20 ± 0.25	20.30 ± 0.30	29.50min	21.50 ± 0.20	4.00 ± 0.15	—	2
<b>EFD45</b>	45.00 ± 0.50	27.60 ± 0.15	6.30 ± 0.15	21.60 ± 0.30	30.50 ± 0.50	20.20 ± 0.20	4.40 ± 0.15	—	2
<b>EFD45.2</b>	45.20 ± 0.65	24.70 ± 0.20	5.90 ± 0.15	24.00 ± 0.30	33.10 ± 0.60	18.00 ± 0.20	3.00 ± 0.15	—	2
<b>EFD45.3</b>	45.30 ± 0.70	25.30 ± 0.20	5.90 ± 0.20	23.80 ± 0.20	33.50 ± 0.70	18.50 ± 0.20	2.90 ± 0.20	≤ 0.50	2
<b>EFD47</b>	47.00 ± 0.80	28.10 ± 0.20	8.70 ± 0.20	21.60 ± 0.40	30.60min	20.70 ± 0.20	6.50 ± 0.15	—	2
<b>EFD50</b>	50.00 ± 0.70	28.00 ± 0.30	6.20 ± 0.20	24.00 ± 0.30	34.40min	20.60 ± 0.20	3.20 ± 0.20	—	2
<b>EFD64</b>	64.00 ± 0.80	40.00 ± 0.20	6.60 ± 0.25	30.80 ± 0.40	39.00 ± 0.55	27.50 ± 0.20	4.40 ± 0.10	—	2

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>EFD33.7</b>	1.93	96.01	49.78	4779.38	25.06
<b>EFD34.8</b>	1.79	93.92	52.42	4923.98	27.52
<b>EFD35</b>	1.83	106.80	58.26	6222.27	32.64
<b>EFD35A</b>	1.11	61.68	55.32	3412.48	18.74
<b>EFD35.4</b>	1.74	108.31	32.33	6570.89	35.08
<b>EFD35.4A</b>	1.75	108.37	61.76	6692.95	35.08
<b>EFD35.5</b>	1.28	78.47	61.19	4801.89	26.68
<b>EFD36</b>	1.16	81.57	70.26	5730.55	30.00
<b>EFD36.1</b>	0.70	81.02	116.48	9437.08	48.64
<b>EFD36.25</b>	1.27	102.80	80.78	8304.47	50.52
<b>EFD37.7</b>	1.39	79.59	57.29	4559.47	28.16
<b>EFD37.7A</b>	1.32	79.73	60.35	4811.71	27.50
<b>EFD37.8</b>	1.75	113.58	64.75	7354.31	43.80
<b>EFD40.2</b>	1.68	102.78	61.02	6271.50	37.60
<b>EFD41</b>	0.86	95.80	112.00	10729.60	54.62
<b>EFD42.9</b>	1.07	99.53	92.80	9236.38	50.80
<b>EFD43</b>	1.15	107.57	93.91	10102.30	58.66
<b>EFD43.1</b>	1.39	97.83	70.65	6911.83	41.94
<b>EFD43.4</b>	1.35	100.98	74.82	7555.32	40.60
<b>EFD43.7</b>	1.38	115.12	83.66	9630.94	53.04
<b>EFD43.7A</b>	1.49	119.23	80.04	9543.03	50.68
<b>EFD45</b>	1.23	114.05	92.97	10603.80	56.28
<b>EFD45.2</b>	1.56	104.87	67.15	7042.38	41.66
<b>EFD45.3</b>	1.55	107.36	69.30	7440.36	42.94
<b>EFD47</b>	0.84	116.84	138.72	16208.60	86.40
<b>EFD50</b>	1.40	118.04	83.89	9902.38	54.60
<b>EFD64</b>	1.10	157.65	143.80	22669.90	130.60

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										AL + 40% - 30% (nH/N <sup>2</sup> )		
	P4	P41	P45	P451	P452	P47	P48	P61	A05	A07	A10(L)	A121(L)	A151(L)
<b>EFD33.7</b>	1300		1570			1530							
<b>EFD34.8</b>						1800							
<b>EFD35</b>	1600												
<b>EFD35A</b>		2300											
<b>EFD35.4</b>	1500												
<b>EFD35.4A</b>	1672												
<b>EFD35.5</b>						2100							
<b>EFD36</b>	1900												
<b>EFD36.1</b>	3400												
<b>EFD36.25</b>	2100												
<b>EFD37.7</b>					2280								
<b>EFD37.7A</b>						1900							
<b>EFD37.8</b>	1800												
<b>EFD40.2</b>	1650												
<b>EFD41</b>		3900											
<b>EFD42.9</b>	2450												
<b>EFD43</b>	2300												
<b>EFD43.1</b>					2300								
<b>EFD43.4</b>						1800							
<b>EFD43.7</b>	1700												
<b>EFD43.7A</b>					1950								
<b>EFD45</b>	2000					1500							
<b>EFD45.2</b>						1800							
<b>EFD45.3</b>						1800							
<b>EFD47</b>	3400												
<b>EFD50</b>		1800											
<b>EFD64</b>	2950												

Remark:


1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : EPC Cores








Ordering Code:

P4	EPC19	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:

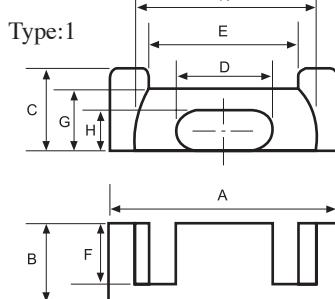

Type:2

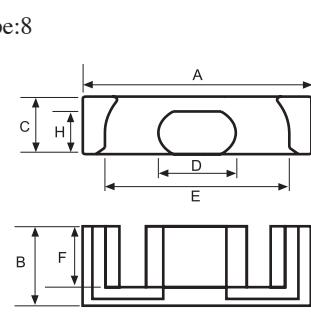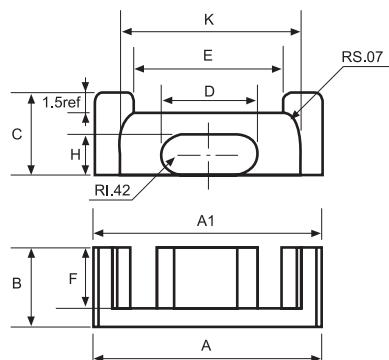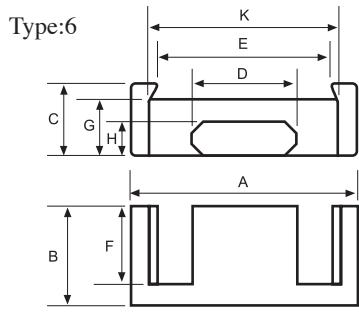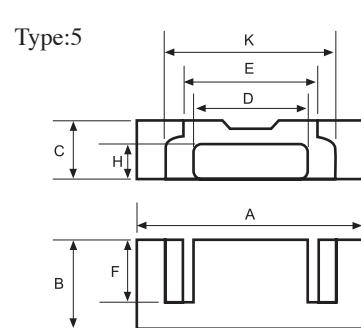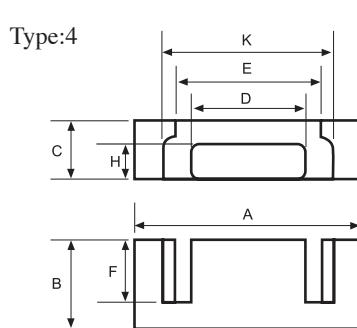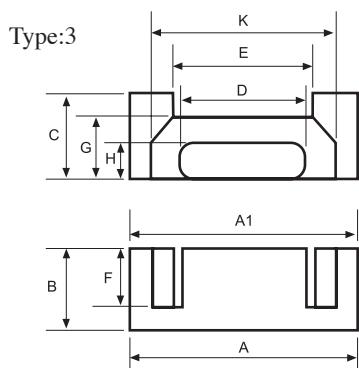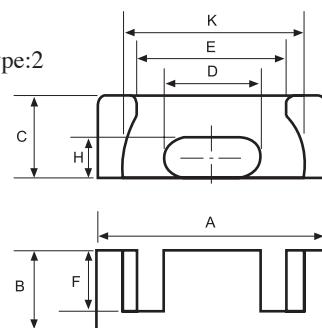

## DIMENSIONS

CORES	DIMENSIONS (mm)									Type
	A	B	C	D	E	F	G	H	K	
<b>EPC10</b>	10.20 ± 0.30	4.05 ± 0.15	3.40 ± 0.15	5.00 ± 0.10	5.30min	2.55min	—	1.90 ± 0.10	7.60min	2
<b>EPC10A</b>	10.20 ± 0.30	4.05 ± 0.15	3.40 ± 0.15	5.00 ± 0.10	5.70min	2.55min	—	1.90 ± 0.10	7.90min	8
<b>EPC12.6</b>	12.40 <sup>+0.40</sup> <sub>-0.00</sub>	5.75 <sup>+0.13</sup> <sub>-0.00</sub>	3.60 <sup>+0.00</sup> <sub>-0.25</sub>	6.20 <sup>+0.00</sup> <sub>-0.30</sub>	7.32 <sup>+0.30</sup> <sub>-0.00</sub>	3.25 <sup>+0.20</sup> <sub>-0.00</sub>	—	2.30 <sup>+0.18</sup> <sub>-0.18</sub>	8.80 <sup>+0.30</sup> <sub>-0.00</sub>	2
<b>EPC13A</b>	13.50 ± 0.25	6.60 ± 0.20	4.60 ± 0.15	5.60 ± 0.15	8.50min	4.50 ± 0.20	—	2.05 ± 0.10	11.00 ± 0.20	1
<b>EPC13D</b>	13.20 ± 0.25	6.60 ± 0.20	4.60 ± 0.15	5.60 ± 0.15	8.70min	4.50 ± 0.20	—	2.05 ± 0.10	11.00min	1
<b>EPC13F</b>	13.10 ± 0.20	6.60 ± 0.20	4.40 <sup>+0.10</sup> <sub>-0.15</sub>	5.55 ± 0.15	8.30min	4.50 ± 0.20	3.65 ± 0.15	2.15 <sup>+0.10</sup> <sub>-0.15</sub>	10.60min	1
<b>EPC14.5</b>	14.50 ± 0.30	7.40 ± 0.20	6.00 ± 0.15	7.00 ± 0.15	10.10 ± 0.25	5.50 ± 0.15	—	3.20 ± 0.10	12.30 ± 0.30	2
<b>EPC17A</b>	17.60 ± 0.38	8.55 ± 0.20	6.00 ± 0.15	7.70 ± 0.15	11.50min	6.05 ± 0.20	—	2.75 ± 0.10	14.40min	1
<b>EPC17B</b>	17.60 ± 0.30	8.55 ± 0.20	6.05 ± 0.15	7.60 ± 0.20	12.00min	6.25 ± 0.20	—	2.85 ± 0.15	14.50min	7
<b>EPC17D/6/8.6</b>	17.60 ± 0.30	8.60 ± 0.15	6.00 ± 0.15	7.70 ± 0.20	12.00min	6.10 ± 0.20	—	2.85 ± 0.15	14.60min	1
<b>EPC18</b>	18.40 ± 0.30	13.20 ± 0.15	4.10 ± 0.15	9.10 ± 0.15	10.70min	10.30 ± 0.15	—	2.65 ± 0.10	13.10min	1
<b>EPC19/20</b>	19.10 ± 0.40	10.00 ± 0.20	6.00 ± 0.15	8.50 ± 0.15	13.10min	7.50 <sup>+0.20</sup> <sub>-0.10</sub>	—	2.50 ± 0.10	15.80min	1
<b>EPC19A</b>	19.60 ± 0.50	9.75 ± 0.20	6.00 ± 0.20	8.20 ± 0.20	13.60 ± 0.50	7.25 ± 0.20	—	2.40 ± 0.15	16.40 ± 0.50	1
<b>EPC19B</b>	19.60 ± 0.50	9.75 ± 0.20	6.00 ± 0.20	8.20 ± 0.20	13.40 ± 0.50	7.25 ± 0.20	—	2.40 ± 0.15	16.40 ± 0.50	1
<b>EPC19.5</b>	19.50 ± 0.40	10.90 ± 0.20	6.00 ± 0.15	8.50 ± 0.15	13.40min	8.40 ± 0.15	4.60 ± 0.15	2.45 ± 0.15	16.20min	3
<b>EPC19.6</b>	19.60 ± 0.40	12.34 ± 0.25	4.12 ± 0.10	10.02 ± 0.15	14.50 ± 0.35	9.25 ± 0.20	—	2.03 ± 0.10	15.75 ± 0.35	4
<b>EPC20</b>	20.00 ± 0.40	12.34 ± 0.25	4.12 ± 0.15	10.02 ± 0.15	14.90 ± 0.35	9.25 ± 0.20	—	2.03 ± 0.15	16.15 ± 0.35	4
<b>EPC21.9</b>	21.90 ± 0.30	14.50 ± 0.20	7.30 ± 0.15	9.50 ± 0.15	14.70min	11.55 ± 0.15	—	4.20 ± 0.15	16.40min	5
<b>EPC24.8</b>	24.80 ± 0.40	12.80 ± 0.15	8.90 ± 0.15	8.40 ± 0.20	20.10 ± 0.30	9.60 ± 0.15	—	6.60 ± 0.15	—	8
<b>EPC25</b>	25.40 ± 0.50	12.50 ± 0.25	8.00 ± 0.25	10.50 ± 0.25	18.35 ± 0.40	9.00 ± 0.20	6.20ref	4.00 ± 0.20	21.05 ± 0.40	6



## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>EPC10</b>	2.03	19.28	8.36	161.23	0.92
<b>EPC10A</b>	2.18	18.73	8.61	161.27	0.88
<b>EPC12.6</b>	1.56	22.51	14.42	324.59	1.44
<b>EPC13A</b>	2.55	31.08	12.18	378.55	2.12
<b>EPC13D</b>	2.38	29.29	12.33	361.10	2.00
<b>EPC13F</b>	2.28	28.92	12.68	366.80	1.80
<b>EPC14.5</b>	1.97	24.38	12.39	301.97	1.73
<b>EPC17A</b>	1.76	38.87	22.07	857.90	4.72
<b>EPC17B</b>	1.85	40.00	21.60	864.00	4.72
<b>EPC17D/6.8.6</b>	1.79	30.68	17.16	526.47	4.60
<b>EPC18</b>	2.49	55.11	22.09	1217.38	6.36
<b>EPC19/20</b>	2.07	47.12	22.72	1070.56	5.36
<b>EPC19A</b>	1.88	43.30	23.00	995.90	5.38
<b>EPC19B</b>	2.26	49.38	21.89	1080.93	5.30
<b>EPC19.5</b>	1.94	41.99	21.64	908.69	5.90
<b>EPC19.6</b>	2.95	52.33	17.70	926.24	5.42
<b>EPC20</b>	2.89	53.24	18.40	979.62	5.52
<b>EPC21.9</b>	1.71	63.15	36.90	2330.24	12.84
<b>EPC24.8</b>	1.22	60.34	49.24	2970.86	15.50
<b>EPC25</b>	1.39	58.64	42.31	2481.06	12.16

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										AL ± 30% (nH/N <sup>2</sup> )		
	P4	P41	P45	P451	P452	P47	P48	P61	A05	A07	A10(L)	A121(L)	A151(L)
<b>EPC10</b>	820	800				900				1180			
<b>EPC10A</b>	950	840				970				1400			3360min
<b>EPC12.6</b>	1000												
<b>EPC13A</b>	910	890	950			900	910			1400	3240		3500min
<b>EPC13D</b>	800	770	920			900	800						
<b>EPC13F</b>	820												
<b>EPC14.5</b>	1200												
<b>EPC17A</b>	1150	1120	1350			1360							
<b>EPC17B</b>	1150	1100				1300							
<b>EPC17D/6.8.6</b>	1150	1090											
<b>EPC18</b>	1000												
<b>EPC19/20</b>	1000	990				1170							
<b>EPC19A</b>	1100	1060				1300							
<b>EPC19B</b>	1100					1280							
<b>EPC19.5</b>	1040												
<b>EPC19.6</b>	860												
<b>EPC20</b>	820												
<b>EPC21.9</b>	1390												
<b>EPC24.8</b>						2000							
<b>EPC25</b>	1550	1500				1840							

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.


## Type : ER Cores (1)

Ordering Code:


P4            ER14.5/11.3            G□  
 Material      Core Size      Gapped AL Value  
 材質           品名

Shape:


Type:1

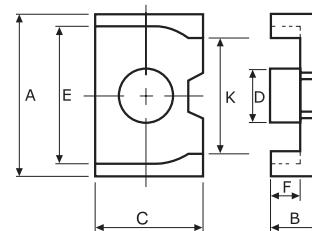


Type:2

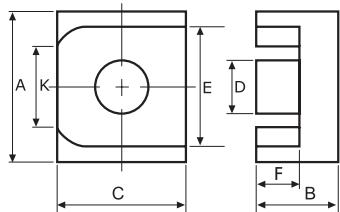


Type:3



Type:4

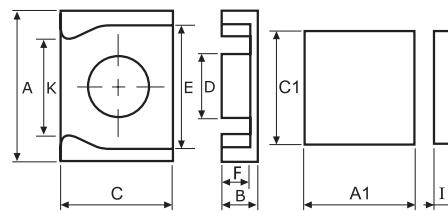

Type:5

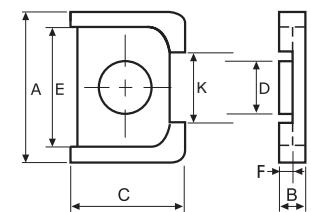

## DIMENSIONS

CORES	DIMENSIONS (mm)										Type
	A	B	C	D	E	F	K	A1	C1	I	
<b>ER8.7</b>	$8.70 \pm 0.15$	$2.65 \pm 0.10$	$4.00 \pm 0.10$	$2.40 \pm 0.10$	$7.20 \pm 0.15$	$1.90 \pm 0.10$	$6.42 \pm 0.15$	—	—	—	4
<b>ER9.95/6.2</b>	$9.95 \pm 0.15$	$3.10 \pm 0.10$	$6.50 \pm 0.10$	$4.35 \pm 0.10$	$7.90 \pm 0.15$	$2.00 \pm 0.10$	$6.50 \pm 0.15$	—	—	—	1
<b>ER10/4.3</b>	$9.90 \pm 0.15$	$2.15 \pm 0.10$	$7.80^{+0.10}_{-0.13}$	$3.70 \pm 0.10$	$8.10^{+0.15}_{-0.10}$	$1.10^{+0.08}_{-0.07}$	$6.50 \pm 0.15$	—	—	—	1
<b>ER10/4.46</b>	$9.90 \pm 0.20$	$2.23 \pm 0.10$	$7.80 \pm 0.15$	$3.70 \pm 0.10$	$8.10 \pm 0.20$	$1.13 \pm 0.10$	$6.50 \pm 0.15$	—	—	—	1
<b>ER12/9/5</b>	$12.20 \pm 0.15$	$2.50 \pm 0.08$	$9.00^{+0.13}_{-0.12}$	$5.55 \pm 0.10$	$10.00 \pm 0.15$	$1.00 \pm 0.08$	$8.60 \pm 0.15$	—	—	—	1
<b>ER12/9/5.2</b>	$12.20 \pm 0.20$	$2.60 \pm 0.08$	$9.00 \pm 0.15$	$5.55 \pm 0.10$	$10.00 \pm 0.20$	$1.10 \pm 0.08$	$8.60 \pm 0.15$	—	—	—	1
<b>ER12/9/5.7</b>	$12.20 \pm 0.20$	$2.87 \pm 0.06$	$9.00 \pm 0.15$	$5.55 \pm 0.10$	$10.00 \pm 0.20$	$1.37 \pm 0.06$	$8.60 \pm 0.15$	—	—	—	1
<b>ER12/9/7</b>	$12.20 \pm 0.20$	$3.50 \pm 0.08$	$9.00 \pm 0.15$	$5.55 \pm 0.10$	$10.00 \pm 0.15$	$2.00 \pm 0.08$	$8.60 \pm 0.15$	—	—	—	1
<b>ER12/9/8</b>	$12.20 \pm 0.20$	$4.00 \pm 0.06$	$9.00 \pm 0.15$	$5.55 \pm 0.10$	$10.00 \pm 0.15$	$2.50 \pm 0.06$	$8.60 \pm 0.15$	—	—	—	1
<b>ER12.45/9/5.1</b>	$12.45 \pm 0.15$	$2.55 \pm 0.08$	$9.00 \pm 0.15$	$5.60 \pm 0.10$	$10.25 \pm 0.15$	$1.15^{+0.10}_{-0.08}$	$8.60 \pm 0.15$	—	—	—	1
<b>ERI12.85/9.3/3.96/1.13</b>	$12.85 \pm 0.20$	$3.96 \pm 0.10$	$9.30 \pm 0.25$	$5.30 \pm 0.15$	$10.45\text{min}$	$2.66\text{min}$	$8.70\text{min}$	$12.85 \pm 0.20$	$9.30 \pm 0.25$	$11.13 \pm 0.05$	4
<b>ER13.6/9.35/4.5</b>	$13.60 \pm 0.15$	$2.25 \pm 0.10$	$9.35 \pm 0.10$	$5.60^{+0.08}_{-0.15}$	$11.05\text{min}$	$1.20 \pm 0.10$	$3.80 \pm 0.10$	—	—	—	3
<b>ER14.5/11.3</b>	$14.50 \pm 0.20$	$4.10 \pm 0.10$	$11.30 \pm 0.20$	$6.00 \pm 0.20$	$12.20 \pm 0.15$	$2.90 \pm 0.10$	$8.30 \pm 0.15$	—	—	—	2
<b>ERI14.5B/11.3</b>	$14.50 \pm 0.30$	$5.60 \pm 0.10$	$11.30 \pm 0.25$	$6.00 \pm 0.25$	$12.20 \pm 0.30$	$4.40 \pm 0.10$	$9.27 \pm 0.30$	$14.50 \pm 0.30$	$11.30 \pm 0.25$	$1.20 \pm 0.10$	4
<b>ERI24.52A</b>	$24.52 \pm 0.40$	$8.90 \pm 0.10$	$20.60 \pm 0.30$	$11.30^{+0.15}_{-0.12}$	$21.30 \pm 0.35$	$6.05 \pm 0.15$	$14.00 \pm 0.30$	$24.52 \pm 0.30$	$20.60 \pm 0.30$	$3.10 \pm 0.10$	4
<b>ER26.85</b>	$26.85 \pm 0.40$	$9.05 \pm 0.15$	$20.10 \pm 0.30$	$12.00 \pm 0.20$	$21.70 \pm 0.40$	$5.05 \pm 0.15$	$16.05 \pm 0.40$	—	—	—	5
<b>ER33D</b>	$32.70 \pm 0.50$	$7.40 \pm 0.20$	$28.90 \pm 0.50$	$15.40 \pm 0.30$	$27.30 \pm 0.50$	$4.20 \pm 0.20$	$19.50 \pm 0.35$	—	—	—	4



## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	L <sub>e</sub> (mm)	A <sub>e</sub> (mm <sup>2</sup> )	V <sub>e</sub> (mm <sup>3</sup> )	Wt(g/set)
<b>ER8.7</b>	2.73	15.14	5.55	84.12	0.44
<b>ER9.95/6.2</b>	1.06	15.09	16.01	241.59	0.62
<b>ER10/4.3</b>	0.75	11.51	15.20	174.95	1.16
<b>ER10/4.46</b>	0.78	11.80	15.12	178.42	1.20
<b>ER12/9/5</b>	0.50	13.39	26.72	357.78	2.34
<b>ER12/9/5.2</b>	0.48	14.66	30.70	450.06	2.64
<b>ER12/9/5.7</b>	0.56	14.87	26.46	393.46	2.52
<b>ER12/9/7</b>	0.54	13.89	25.62	355.86	2.52
<b>ER12/9/8</b>	0.74	19.36	25.95	502.39	2.64
<b>ER12.45/9/5.1</b>	0.59	14.01	23.94	335.40	1.92
<b>ERI12.85/9.3/3.96/1.13</b>	0.78	16.72	21.47	358.98	1.85
<b>ER13.6/9.35/4.5</b>	0.69	14.66	21.27	311.68	2.02
<b>ER14.5/11.3</b>	0.70	20.12	28.53	574.02	3.46
<b>ERI14.5B/11.3</b>	0.76	21.71	28.48	618.30	3.12
<b>ERI24.52A</b>	0.28	30.04	107.17	3219.39	19.85
<b>ER26.85</b>	0.32	40.11	125.11	5018.16	28.50
<b>ER33D</b>	0.19	39.29	208.90	8211.00	49.00


## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )							
	P4	P41	P45	P451	P452	P47	P51	P61
<b>ER8.7</b>	530							
<b>ER9.95/6.2</b>						1720		
<b>ER10/4.3</b>	1750	1700					1280	
<b>ER10/4.46</b>	1850							
<b>ER12/9/5</b>	3330	2600				3500	2170	
<b>ER12/9/5.2</b>	3200	3000	3370			3320	2230	
<b>ER12/9/5.7</b>	3100					2850	1900	
<b>ER12/9/7</b>	2530		2850			2800		
<b>ER12/9/8</b>	2350					2500	1550	
<b>ER12.45/9/5.1</b>	3300							
<b>ERI12.85/9.3/3.96/1.13</b>	1960							
<b>ER13.6/9.35/4.5</b>	1950	1850						
<b>ER14.5/11.3</b>	2500	2400				2750		
<b>ERI14.5B/11.3</b>		2300						
<b>ERI24.52A</b>						4530		
<b>ER26.85</b>						6500		
<b>ER33D</b>	10000							

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. Customized dimensions are available.

## Type : ER Cores (2-1)

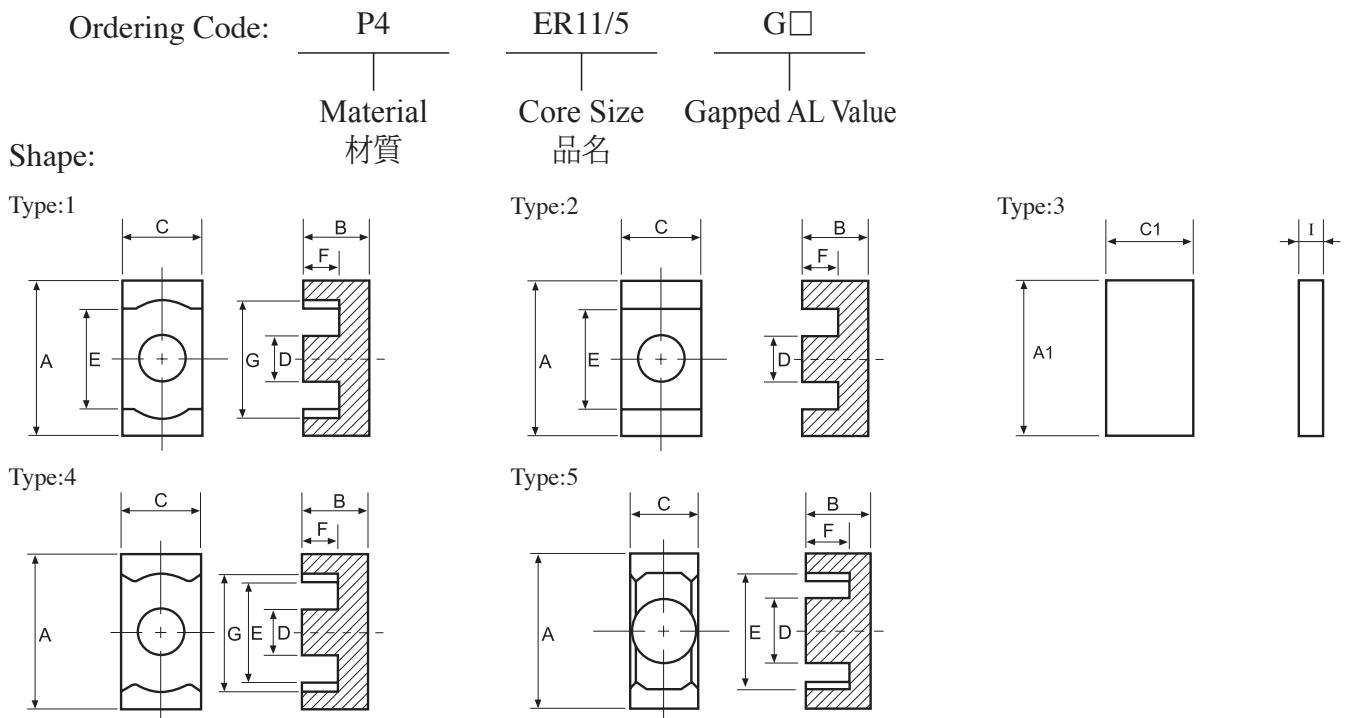

### DIMENSIONS

CORES	DIMENSIONS (mm)										Type
	A	B	C	D	E	F	G	A1	C1	I	
<b>ER6.8</b>	6.80 ± 0.15	1.48 ± 0.08	2.50 ± 0.10	2.05 ± 0.10	5.80min	0.99 ± 0.08	—	—	—	—	2
<b>ER7.5/5</b>	7.50 ± 0.15	2.50 ± 0.10	4.00 ± 0.10	2.60 ± 0.10	5.70 ± 0.10	1.75 ± 0.07	6.22 <sup>+0.13</sup> <sub>-0.12</sub>	—	—	—	1
<b>ERI7.5/4/2.15/0.75</b>	7.50 ± 0.15	2.15 ± 0.10	4.00 ± 0.10	2.60 ± 0.10	5.70 ± 0.10	1.40 ± 0.07	6.22 <sup>+0.13</sup> <sub>-0.12</sub>	7.50 ± 0.15	4.00 ± 0.10	0.75 ± 0.05	1 + 3
<b>ER8/5</b>	8.00 ± 0.15	2.50 ± 0.10	4.00 ± 0.10	2.60 ± 0.10	5.70 ± 0.10	1.73 ± 0.10	6.55min	—	—	—	4
<b>ER9.5/3.6</b>	9.35 ± 0.15	1.80 ± 0.05	4.90 ± 0.10	3.40 ± 0.10	7.00min	0.93 <sup>+0.07</sup> <sub>-0.08</sub>	7.40min	—	—	—	1
<b>ER9.5/5</b>	9.35 ± 0.15	2.45 ± 0.05	4.90 ± 0.10	3.40 ± 0.10	7.00min	1.67 ± 0.07	7.40min	—	—	—	1
<b>ER10B</b>	10.00 ± 0.20	2.30 ± 0.10	8.80 ± 0.20	2.78 ± 0.10	8.17 ± 0.20	1.29 ± 0.10	6.40 ± 0.15	—	—	—	9
<b>ER10.83</b>	10.83 <sup>+0.18</sup> <sub>-0.17</sub>	2.65 ± 0.05	5.90 ± 0.10	4.12 <sup>+0.13</sup> <sub>-0.12</sub>	7.90min	1.77 ± 0.12	8.98 ± 0.15	—	—	—	1
<b>ER11/3.9</b>	10.83 <sup>+0.18</sup> <sub>-0.17</sub>	1.93 ± 0.05	5.90 ± 0.10	4.12 <sup>+0.13</sup> <sub>-0.12</sub>	7.90min	1.05 <sup>+0.08</sup> <sub>-0.07</sub>	8.85 ± 0.15	—	—	—	1
<b>ER11/5</b>	10.83 <sup>+0.18</sup> <sub>-0.17</sub>	2.45 ± 0.05	5.90 ± 0.10	4.12 <sup>+0.13</sup> <sub>-0.12</sub>	7.90min	1.57 <sup>+0.08</sup> <sub>-0.07</sub>	8.85 ± 0.15	—	—	—	1
<b>ER11.63/5.15</b>	11.63 ± 0.20	2.58 ± 0.10	5.90 ± 0.20	4.12 ± 0.15	8.70min	1.70 ± 0.10	9.65 ± 0.20	—	—	—	1
<b>ER13</b>	12.80 ± 0.20	2.85 ± 0.06	8.70 ± 0.20	5.00 ± 0.10	9.05 ± 0.15	1.75 ± 0.06	11.20 ± 0.20	—	—	—	4
<b>ER13/5.4</b>	12.80 ± 0.20	2.70 ± 0.06	8.70 ± 0.20	5.00 ± 0.10	9.05 ± 0.15	1.60 ± 0.06	11.20 ± 0.20	—	—	—	1
<b>ER13/5.6</b>	12.80 ± 0.20	2.80 ± 0.06	8.70 ± 0.20	5.00 ± 0.10	9.05 ± 0.15	1.70 ± 0.06	11.20 ± 0.20	—	—	—	4
<b>ERI13</b>	12.80 ± 0.20	2.85 ± 0.06	8.70 ± 0.20	5.00 ± 0.10	9.05 ± 0.15	1.75 ± 0.06	11.20 ± 0.20	12.80 ± 0.20	8.70 ± 0.20	1.10 ± 0.05	3 + 4
<b>ER14.5D</b>	14.50 ± 0.25	3.50 ± 0.10	9.25 ± 0.25	5.80 ± 0.20	—	1.70 ± 0.10	12.20 ± 0.25	—	—	—	4
<b>ER14.5/6</b>	14.50 ± 0.20	2.95 ± 0.05	6.70 ± 0.10	4.70 ± 0.10	11.80 ± 0.20	1.60 ± 0.10	—	—	—	—	2
<b>ER14.5/6.8</b>	14.50 ± 0.20	3.40 ± 0.10	6.70 ± 0.10	4.70 ± 0.10	11.80 ± 0.20	2.10 ± 0.10	—	—	—	—	2
<b>ER14.5/9.4</b>	14.50 ± 0.20	4.70 ± 0.10	6.70 ± 0.10	4.70 ± 0.10	11.80 ± 0.20	3.40 ± 0.10	—	—	—	—	2
<b>ER14.8/6.2</b>	14.80 ± 0.20	3.10 ± 0.10	6.70 ± 0.10	4.70 ± 0.10	12.10 ± 0.20	1.80 ± 0.10	—	—	—	—	2
<b>ER15.2</b>	15.20 <sup>+0.40</sup> <sub>-0.10</sub>	3.10 ± 0.10	6.70 ± 0.20	4.70 ± 0.20	12.50 <sup>+0.40</sup> <sub>-0.10</sub>	1.80 ± 0.15	—	—	—	—	2
<b>ER18</b>	18.00 ± 0.35	3.15 ± 0.10	9.70 ± 0.20	6.20 ± 0.15	13.50min	1.60 ± 0.10	15.60 ± 0.30	—	—	—	4
<b>ER18/7</b>	18.00 ± 0.35	3.50 ± 0.10	9.70 ± 0.20	6.20 ± 0.15	13.50min	1.95 ± 0.10	15.60 ± 0.30	—	—	—	4



## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>ER6.8</b>	3.98	9.91	2.49	24.67	0.07
<b>ER7.5/5</b>	2.26	13.06	5.78	75.51	0.35
<b>ERI7.5/4/2.15/0.75</b>	1.65	9.65	5.86	56.55	0.31
<b>ER8/5</b>	2.34	13.97	5.97	83.42	0.45
<b>ER9.5/3.6</b>	1.22	11.14	9.16	102.04	0.48
<b>ER9.5/5</b>	1.56	13.63	8.73	118.99	0.62
<b>ER10B</b>	0.80	13.80	17.21	237.50	1.50
<b>ER10.83</b>	1.39	16.32	11.72	191.32	1.10
<b>ER11/3.9</b>	1.01	12.14	11.92	144.70	0.80
<b>ER11/5</b>	1.17	14.18	12.13	172.00	0.90
<b>ER11.63/5.15</b>	1.29	15.29	11.87	181.49	1.00
<b>ER13</b>	0.91	18.10	19.90	360.00	1.86
<b>ER13/5.4</b>	0.82	16.24	19.82	321.88	1.84
<b>ER13/5.6</b>	0.91	16.60	18.30	303.78	1.88
<b>ERI13</b>	0.64	13.23	20.78	274.69	1.13
<b>ER14.5D</b>	0.64	19.77	30.85	609.89	3.28
<b>ER14.5/6</b>	1.07	18.38	17.13	314.85	1.69
<b>ER14.5/6.8</b>	1.17	20.18	17.18	346.69	1.90
<b>ER14.5/9.4</b>	1.49	25.46	17.13	436.13	2.38
<b>ER14.8/6.2</b>	1.10	19.47	17.63	343.25	0.91
<b>ER15.2</b>	1.15	20.25	17.55	355.33	1.88
<b>ER18</b>	0.67	20.85	31.31	652.81	3.36
<b>ER18/7</b>	0.74	22.37	30.26	676.92	3.78


## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										AL ± 30% (nH/N <sup>2</sup> )			
	P4	P41	P42	P45	P451	P452	P47	P51	P61	A05	A07	A10(L)	A121(L)	A151(L)
<b>ER6.8</b>	265													
<b>ER7.5/5</b>	710	690		720	730		720	450	330	950				
<b>ERI7.5/4/2.15/0.75</b>	700						760							
<b>ER8/5</b>	600													
<b>ER9.5/3.6</b>	1090													
<b>ER9.5/5</b>	950	930	740	1060			1040	660		1250	1580	3600	3200min	3700min
<b>ER10B</b>							1910							
<b>ER10.83</b>	1085													
<b>ER11/3.9</b>	1040min	1340		1430			1400				2224	6600		
<b>ER11/5</b>	1400	1370	1180	1590		1560	1560	950		2100	2380	6400	6980	7800
<b>ER11.63/5.15</b>	1100			1270			1250							
<b>ER13</b>	2000	1930	1600				2040	1250						
<b>ER13/5.4</b>	2000		1640	2200			2110							
<b>ER13/5.6</b>			1610	2220			2040							
<b>ERI13</b>	2100	2035	1800				2400	1600						
<b>ER14.5D</b>	2550													
<b>ER14.5/6</b>	1700	1600	1275				1800	1210		2200	2600	6600	8000	6000min
<b>ER14.5/6.8</b>	1300	1280					1720	1000						
<b>ER14.5/9.4</b>	1450													
<b>ER14.8/6.2</b>	1700						1900							
<b>ER15.2</b>	1460	1420		1680			1620							
<b>ER18</b>	2650	2400	2000				2800	1770						
<b>ER18/7</b>	2450		1950	2800			2750							

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : ER Cores (2-2)

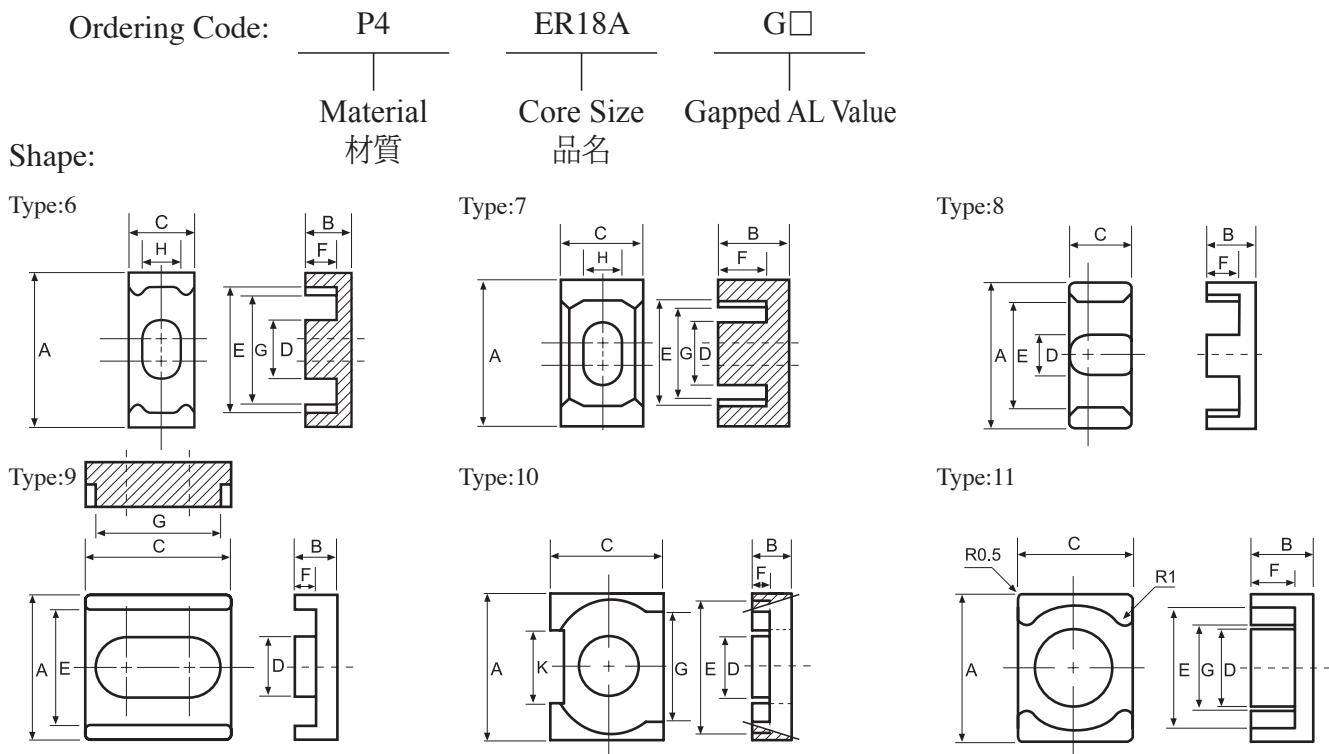

### DIMENSIONS

CORES	DIMENSIONS (mm)											Type
	A	B	C	D	E	F	G	H	A1	C1	I	
<b>ER18A</b>	18.00 ± 0.35	4.00 ± 0.10	10.00 ± 0.20	7.20 ± 0.10	14.00 ± 0.20	2.00 ± 0.10	—	—	—	—	—	2
<b>ER18D/7.2</b>	18.00 ± 0.35	3.60 ± 0.15	6.00 ± 0.20	6.00 ± 0.15	14.40 ± 0.30	1.60 ± 0.15	—	—	—	—	—	5
<b>ERI18D/10.2/2.1</b>	18.00 ± 0.35	2.20 ± 0.10	10.00 ± 0.20	5.00 ± 0.15	13.50 ± 0.35	1.00 ± 0.15	15.60 ± 0.35	—	18.00 ± 0.35	10.00 ± 0.20	1.00 ± 0.08	3 + 4
<b>ER18.2D</b>	18.20 ± 0.20	8.50 ± 0.15	5.20 ± 0.10	5.20 ± 0.10	13.00min	6.00 ± 0.15	4.00 <sup>+0.30</sup> <sub>-0.10</sub>	—	—	—	—	2
<b>ER18.8/14.5</b>	19.05 ± 0.25	3.45 ± 0.10	14.75 ± 0.25	6.80 ± 0.10	16.30 ± 0.15	2.20 ± 0.10	—	—	—	—	—	2
<b>ER19</b>	19.00 ± 0.35	8.00 ± 0.20	5.50 ± 0.20	5.10 ± 0.20	14.50 ± 0.30	5.65 ± 0.15	—	—	—	—	—	2
<b>ER19.1</b>	19.10 ± 0.25	2.87 ± 0.13	14.40 ± 0.18	6.43 ± 0.15	16.46 ± 0.20	1.65min	—	—	—	—	—	2
<b>ER19.8</b>	19.80 ± 0.30	4.30 ± 0.15	6.60 ± 0.15	6.00 ± 0.20	14.90min	2.10 ± 0.15	15.80 <sup>+0.55</sup> <sub>-0.30</sub>	—	—	—	—	4
<b>ER20/16.4</b>	20.00 ± 0.30	8.20 ± 0.15	14.00 ± 0.30	8.80 ± 0.15	13.10 ± 0.25	6.00 ± 0.10	18.00 ± 0.30	—	—	—	—	4
<b>ER20M</b>	20.00 ± 0.35	3.00 ± 0.10	10.00 ± 0.20	6.20 ± 0.20	17.00 ± 0.30	1.65 ± 0.10	—	—	—	—	—	2
<b>ERI20</b>	20.00 ± 0.30	5.70 ± 0.10	14.00 ± 0.30	8.80 ± 0.15	13.10 ± 0.25	3.50 ± 0.15	18.00 ± 0.30	—	20.00 ± 0.30	14.00 ± 0.30	2.20 ± 0.05	3 + 4
<b>ERI20/14/8.2/2.2</b>	20.00 ± 0.30	8.20 ± 0.10	14.00 ± 0.30	8.80 ± 0.15	13.10 ± 0.25	6.00 ± 0.10	18.00 ± 0.30	—	20.00 ± 0.30	14.00 ± 0.30	2.20 ± 0.05	3 + 4
<b>ER20.5/12.5</b>	20.50 ± 0.30	6.25 ± 0.20	9.40 ± 0.20	7.50 ± 0.20	17.00 ± 0.30	4.30 ± 0.15	14.00min	5.50 ± 0.15	—	—	—	6
<b>ER21.2</b>	21.20 ± 0.40	9.00 ± 0.15	7.80 ± 0.15	5.66 ± 0.20	15.90 ± 0.40	6.50 ± 0.20	—	—	—	—	—	8
<b>ER22KL</b>	22.00 ± 0.50	16.35 ± 0.15	17.00 ± 0.40	11.50 ± 0.20	18.50 <sup>+0.50</sup> <sub>-0.30</sub>	12.95 ± 0.20	13.00 ± 0.50	—	—	—	—	11
<b>ERI22.2/15.8/6.7/2.5</b>	22.20 ± 0.30	6.70 ± 0.10	15.80 ± 0.30	10.00 ± 0.20	18.20 ± 0.30	4.20 ± 0.15	—	—	22.20 ± 0.30	15.80 ± 0.30	2.50 ± 0.05	2 + 3
<b>ER22.6/8.9</b>	22.60 ± 0.40	4.45 ± 0.15	6.50 ± 0.25	6.50 ± 0.15	17.50 ± 0.35	2.10 ± 0.10	—	—	—	—	—	1
<b>ERI22.7/14/7.1/2.2</b>	22.75 ± 0.25	7.10 ± 0.10	14.00 ± 0.30	8.80 ± 0.15	15.40min	4.90 ± 0.15	20.25 ± 0.25	—	22.75 ± 0.25	14.00 ± 0.30	2.20 ± 0.10	3 + 4
<b>ER23</b>	23.20 ± 0.45	3.60 ± 0.10	12.50 ± 0.25	8.00 ± 0.20	17.50min	1.60 ± 0.15	20.20 ± 0.40	—	—	—	—	4
<b>ER25</b>	25.00 ± 0.40	6.05 ± 0.10	18.00 ± 0.30	11.00 ± 0.20	14.50min	3.55 ± 0.15	22.00 ± 0.40	—	—	—	—	4
<b>ERI25</b>	25.00 ± 0.40	6.05 ± 0.10	18.00 ± 0.30	11.00 ± 0.20	14.50min	3.55 ± 0.15	22.00 ± 0.40	—	25.00 ± 0.40	18.00 ± 0.30	2.30 ± 0.05	3 + 4
<b>ERI25F</b>	25.00 ± 0.50	5.50 ± 0.10	14.80 ± 0.30	9.40 ± 0.20	18.30min	3.10 ± 0.10	21.70 ± 0.40	—	25.00 ± 0.50	14.80 ± 0.30	2.50 ± 0.10	3 + 4
<b>ERI25.2B/18.3/7.5/2.4</b>	25.20 ± 0.50	7.50 ± 0.10	18.30 ± 0.30	10.20 ± 0.20	20.60 ± 0.40	5.10 ± 0.15	—	—	25.20 ± 0.50	18.30 ± 0.30	2.40 ± 0.10	2 + 3

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>ER18A</b>	0.57	22.98	40.20	923.80	5.00
<b>ER18D/7.2</b>	0.90	22.27	24.85	553.47	2.84
<b>ERI18D/10.2.2/1</b>	1.25	16.50	13.16	217.14	5.87
<b>ER18.2D</b>	1.75	40.59	23.26	944.02	4.70
<b>ER18.8/14.5</b>	0.64	23.98	37.45	897.86	4.99
<b>ER19</b>	1.34	33.89	25.34	858.77	4.80
<b>ER19.1</b>	0.67	23.47	35.28	828.09	2.12
<b>ER19.8</b>	0.95	26.47	28.60	757.40	3.94
<b>ER20/16.4</b>	0.60	42.05	58.98	2480.11	15.08
<b>ER20M</b>	0.81	23.11	28.66	662.30	3.50
<b>ERI20</b>	0.40	23.80	59.80	1425.00	7.99
<b>ERI20/14.8.2/2.2</b>	0.48	30.08	59.55	1791.26	10.54
<b>ER20.5/12.5</b>	0.96	34.07	35.42	1206.76	7.00
<b>ER21.2</b>	1.36	43.65	32.06	1399.42	8.64
<b>ER22KL</b>	0.68	72.2	105.6	7630.28	19.47
<b>ERI22.2/15.8/6.7/2.5</b>	0.38	27.60	72.54	2002.10	11.17
<b>ER22.6/8.9</b>	0.83	26.83	32.09	860.77	4.54
<b>ERI22.7/14/7.1/2.2</b>	0.50	30.21	60.80	1836.77	9.44
<b>ER23</b>	0.48	25.08	51.79	1298.89	6.94
<b>ER25</b>	0.31	31.84	103.60	3298.60	17.56
<b>ERI25</b>	0.29	26.40	89.70	2370.00	13.57
<b>ERI25F</b>	0.40	28.10	70.40	1978.24	10.40
<b>ERI25.2B/18.3/7.5/2.4</b>	0.36	30.86	85.62	2642.30	14.70


## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										
	P4	P41	P42	P45	P451	P452	P47	P48	P51	P61	A05
<b>ER18A</b>				4100		4000	4000				
<b>ER18D/7.2</b>	2000										
<b>ERI18D/10.2.2/1</b>					1500						
<b>ER18.2D</b>							1650				
<b>ER18.8/14.5</b>	2900	2800							1790		
<b>ER19</b>	1400										
<b>ER19.1</b>		2500									
<b>ER19.8</b>	1900						2150				
<b>ER20/16.4</b>	3370			3590			3500				
<b>ER20M</b>									1000		
<b>ERI20</b>	5000	4860	3500	5100			5000		3060		
<b>ERI20/14.8.2/2.2</b>	3900			4380			4300				
<b>ER20.5/12.5</b>	2100										
<b>ER21.2</b>	1400										
<b>ER22KL</b>										8500min	
<b>ERI22.2/15.8/6.7/2.5</b>		5000									
<b>ER22.6/8.9</b>							2460				
<b>ERI22.7/14/7.1/2.2</b>											
<b>ER23</b>	3465	3400					4100		2550		
<b>ER25</b>	5800	5700	4880				7200		4220		
<b>ERI25</b>	7000	6810	4870				7500		4240		
<b>ERI25F</b>								5000			
<b>ERI25.2B/18.3/7.5/2.4</b>				6120							

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10T<sub>s</sub>. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : ER Cores (2-3)

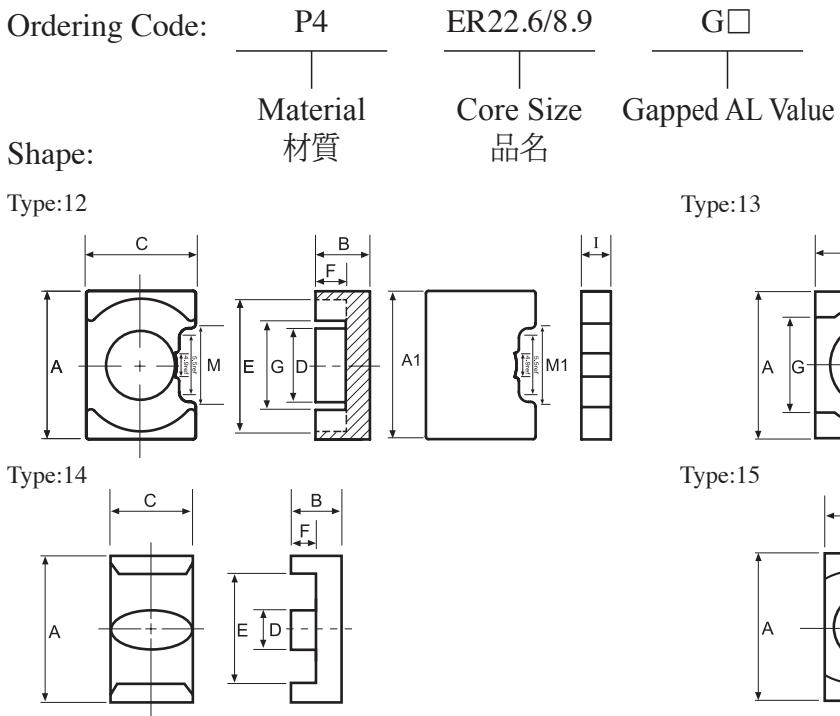

## DIMENSIONS

CORES	DIMENSIONS (mm)												Type
	A	B	C	D	E	F	G	H	K	A1	C1	I	
ERI25.4/19/6.8/2.4	25.40 ± 0.50	6.80 ± 0.15	19.00 ± 0.35	10.00 ± 0.25	20.00min	4.40 ± 0.20	—	—	—	25.40 ± 0.50	19.00 ± 0.35	2.40 ± 0.15	2 + 3
ER25.5	25.50 ± 0.50	4.60 ± 0.10	7.50 ± 0.30	7.50 ± 0.20	19.80min	2.00 ± 0.15	—	—	—	—	—	—	1
ER25.5A	25.50 ± 0.40	5.25 ± 0.10	9.80 ± 0.15	8.20 ± 0.15	16.70 ± 0.30	3.25 ± 0.15	18.50 ± 0.30	—	—	—	—	—	1
ER25.7	25.70 ± 0.40	5.25 ± 0.15	25.35 ± 0.40	6.50 ± 0.20	19.50 ± 0.40	3.00 ± 0.15	24.35 ± 0.35	—	—	—	—	—	9
ER26.6	26.60 ± 0.50	5.00 ± 0.15	10.80 ± 0.30	11.00 ± 0.25	22.40 ± 0.50	2.80 ± 0.15	—	6.00 ± 0.20	—	—	—	—	7
ER27A	27.00 ± 0.40	4.95 ± 0.15	14.50 ± 0.30	10.70 ± 0.20	16.50min	2.10 ± 0.15	22.50 ± 0.40	—	—	—	—	—	1
ER27B	27.00 ± 0.40	4.95 ± 0.15	12.50 ± 0.30	10.00 ± 0.20	—	2.10 ± 0.15	22.50 ± 0.40	—	—	—	—	—	1
ER28A	28.00 ± 0.50	5.60 ± 0.20	22.65 ± 0.50	11.00 ± 0.20	24.20 ± 0.50	3.00 ± 0.20	19.80 ± 0.40	—	13.10 ± 0.40	—	—	—	10
ERI28	28.00 ± 0.35	6.20 ± 0.15	12.00 ± 0.25	9.00 ± 0.20	21.50 ± 0.35	3.60 ± 0.15	—	23.40 ± 0.35	—	28.00 ± 0.35	12.00 ± 0.25	2.60 ± 0.15	1 + 3
ER29.8	29.80 ± 0.80	4.85 ± 0.10	9.50 ± 0.30	7.87 ± 0.25	24.00 ± 0.75	2.03 ± 0.13	—	—	—	—	—	—	2
ER29.8A	29.80 ± 0.80	4.60 ± 0.20	9.50 ± 0.30	9.50 ± 0.30	20.40min	1.80 ± 0.15	22.70 ± 0.70	—	—	—	—	—	4
ER30/8	30.00 ± 0.40	8.00 ± 0.15	20.00 ± 0.30	11.00 ± 0.20	19.45 ± 0.30	5.30 ± 0.20	26.00 ± 0.30	—	—	—	—	—	4
ER30D	30.00 ± 0.40	6.00 ± 0.15	20.00 ± 0.30	11.00 ± 0.20	19.45 ± 0.30	3.30 ± 0.15	26.00 ± 0.30	—	—	—	—	—	1
ERI30.3	30.30 ± 0.45	12.00 ± 0.20	19.50 ± 0.30	13.00 ± 0.20	18.50min	8.70 ± 0.20	26.00 ± 0.40	—	—	30.30 ± 0.45	19.50 ± 0.30	3.30 ± 0.10	3 + 4
ER32B	32.00 ± 0.40	6.35 ± 0.13	20.35 ± 0.30	12.05 ± 0.25	22.66min	3.18 ± 0.20	28.93min	—	—	—	—	—	4
ERI32	32.00 ± 0.50	13.50 ± 0.25	23.00 ± 0.40	15.00 ± 0.20	27.00 ± 0.30	7.65 ± 0.35	18.00 ± 0.30	—	—	32.00 ± 0.50	23.00 ± 0.40	6.00 ± 0.25	12
ER33	33.00 ± 0.50	4.70 ± 0.10	24.00 ± 0.40	17.20 ± 0.35	25.50 ± 0.50	2.90 ± 0.10	≤ 21.00	—	—	—	—	—	7
ER33/60	33.00 ± 0.50	30.00 ± 0.20	24.00 ± 0.40	17.20 ± 0.35	25.50 ± 0.50	25.00 ± 0.20	21.00max	—	—	—	—	—	13
ERI36A	36.00 ± 0.50	10.90 ± 0.20	24.00 ± 0.50	13.20 ± 0.20	22.00min	7.80 ± 0.15	31.20 ± 0.50	—	—	36.00 ± 0.50	24.00 ± 0.50	3.10 ± 0.20	3 + 4
ER40A	40.00 ± 0.70	22.40 ± 0.30	13.30 ± 0.30	13.30 ± 0.30	29.00min	15.40 ± 0.30	—	—	—	—	—	—	15
ER40B	40.00 ± 0.70	22.40 ± 0.20	13.40 ± 0.35	13.30 ± 0.25	29.60 ± 0.60	15.45 ± 0.35	—	—	—	—	—	—	15
ER42	42.00 ± 0.80	7.25 ± 0.15	14.00 <sup>+ 0.20</sup> <sub>- 0.30</sub>	7.00 ± 0.20	34.80min	4.50 ± 0.15	—	—	—	—	—	—	14
ER63	62.80 ± 0.80	19.40 ± 0.20	32.10 ± 0.30	21.60 ± 0.30	50.80 ± 0.80	12.80 ± 0.20	—	—	—	—	—	—	2
ER64/26	64.00 ± 0.80	12.85 ± 0.15	50.80 ± 0.70	25.40 ± 0.40	53.50 ± 0.70	6.40 ± 0.20	—	—	—	—	—	—	2

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>ERI25.4/19/6.8/2.4</b>	0.34	30.77	90.45	2783.14	14.51
<b>ER25.5</b>	0.70	28.80	41.21	1186.73	6.18
<b>ER25.5A</b>	0.67	31.83	47.24	1503.59	8.92
<b>ER25.7</b>	0.25	33.00	131.74	4347.60	22.50
<b>ER26.6</b>	0.93	30.70	33.00	1013.10	8.70
<b>ER27A</b>	0.36	31.15	85.60	2666.93	14.56
<b>ER27B</b>	0.41	31.00	75.20	2331.20	12.22
<b>ER28A</b>	0.36	36.48	106.49	3884.76	22.10
<b>ERI28</b>	0.51	32.30	63.26	2043.48	10.47
<b>ER29.8</b>	0.50	36.56	52.58	1922.32	10.32
<b>ER29.8A</b>	0.53	31.40	59.60	1871.44	10.00
<b>ER30/8</b>	0.38	43.22	113.39	4900.00	28.00
<b>ER30D</b>	0.32	35.40	110.00	3894.00	22.10
<b>ERI30.3</b>	0.33	43.78	131.55	5759.00	28.23
<b>ER32B</b>	0.35	42.12	119.84	5048.29	26.60
<b>ERI32</b>	0.23	43.90	195.00	8561.00	51.80
<b>ER33</b>	0.62	28.70	46.33	1329.40	10.26
<b>ER33/60</b>	0.54	130.08	239.55	31160.66	149.10
<b>ERI36A</b>	0.31	46.98	151.29	7107.78	38.43
<b>ER40A</b>	0.64	97.50	152.00	14820.00	40.06
<b>ER40B</b>	0.66	98.00	149.00	14602.00	72.42
<b>ER42</b>	0.30	47.85	59.96	2869.32	11.10
<b>ER63</b>	0.27	104.58	389.13	40696.00	222.60
<b>ER64/26</b>	0.15	90.29	584.20	52750.00	279.54

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )									
	P4	P41	P42	P45	P451	P452	P47	P48	P51	P61
<b>ERI25.4/19/6.8/2.4</b>							6300			
<b>ER25.5</b>	3000									
<b>ER25.5A</b>	2850	2500					3125			
<b>ER25.7</b>	7800						8900			
<b>ER26.6</b>							3000			
<b>ER27A</b>	5240	5080		6070	6900		5945			
<b>ER27B</b>				5350						
<b>ER28A</b>		6000					7000			
<b>ERI28</b>	3200									
<b>ER29.8</b>		3700								
<b>ER29.8A</b>								4000		
<b>ER30/8</b>	4300	4100					5000			
<b>ER30D</b>				6300						
<b>ERI30.3</b>									4800	
<b>ER32B</b>								5500		
<b>ERI32</b>							11000			
<b>ER33</b>	4100									
<b>ER33/60</b>							6500			
<b>ERI36A</b>	6500	6300		7800			7400			
<b>ER40A</b>	3300									
<b>ER40B</b>							4390			
<b>ER42</b>	3100									
<b>ER63</b>	8355									
<b>ER64/26</b>							13000			

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : ERX Cores


Ordering Code: P47 ERX13 G□

---


Material Core Size Gapped AL Value  
材質 品名

Shape:


Type:1

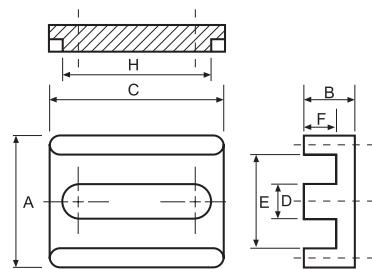

Type:2

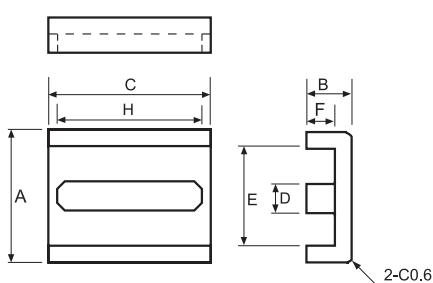

Type:3

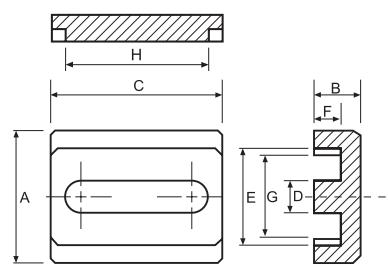

### DIMENSIONS

CORES	DIMENSIONS (mm)								Type
	A	B	C	D	E	F	G	H	
ERX12.2/25.2/5.1	12.20 ± 0.25	5.10 ± 0.15	25.20 ± 0.40	2.90 ± 0.10	8.55min	3.60 ± 0.15	7.60min	21.90 ± 0.30	3
ERX13	13.00 ± 0.25	5.15 ± 0.15	26.00 ± 0.40	3.00 ± 0.10	9.50 ± 0.25	3.75 ± 0.15	—	23.40 ± 0.40	2
ERX13A/28/5.3	13.00 ± 0.40	5.30 ± 0.15	28.00 ± 0.50	3.20 ± 0.20	9.80 ± 0.30	3.50 ± 0.20	—	25.80 ± 0.50	1
ERX26	12.10 ± 0.25	4.95 <sup>+0.20</sup> <sub>-0.10</sub>	26.00 ± 0.40	3.00 ± 0.10	8.60 ± 0.25	3.75 ± 0.15	—	23.40 ± 0.40	2

### EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS					Wt(g/set)
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )		
ERX12.2/25.2/5.1	0.35	24.73	70.87	1752.62		10.42
ERX13	0.35	25.86	74.81	1934.59		9.90
ERX13A/28/5.3	0.29	25.73	89.19	2295.09		12.16
ERX26	0.33	24.96	74.94	1870.50		6.10

### ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )									
	P4	P41	P45	P451	P47	P48	P5	P51	P52	N42
ERX12.2/25.2/5.1					5720					
ERX13					4800					
ERX13A/28/5.3					5500					
ERX26	5000									

Remark:

- AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
- Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
- Customized dimensions are available.

## Type : EPO Cores


Ordering Code: P4 EPO13 G□

Material Core Size Gapped AL Value


材質 品名

Shape:


Type:1

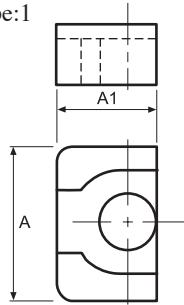

Type:2



Type:3

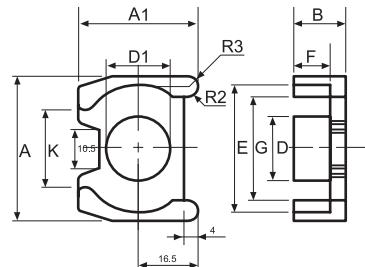

## DIMENSIONS

CORES	DIMENSIONS (mm)										Type
	A	B	A1	D	D1	E	F	G	K		
EPO11.5	11.50 ± 0.30	5.20 ± 0.10	6.10 ± 0.20	3.30 ± 0.15		9.40 ± 0.20	3.70 ± 0.10	5.85ref			2
EPO13	12.50 ± 0.30	6.43 ± 0.10	7.20 ± 0.20	4.35 ± 0.15		10.00 ± 0.30	4.60 ± 0.10	5.90 ± 0.15			1
EPO39	39.00 ± 0.50	15.00 ± 0.20	35.00 ± 0.50	17.00 ± 0.30	39.00 ± 0.50	35.00 ± 0.50	10.70 ± 0.20	28.00 ± 0.50	21.00 ± 0.35		3

## EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS					Wt(g/set)
	C <sub>i</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )		
EPO11.5	2.26	21.42	9.46	202.63		2.00
EPO13	1.34	25.80	19.30	497.94		3.08
EPO39	0.28	75.80	266.60	20208.28		50.00

## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )						AL ± 30% (nH/N <sup>2</sup> )			
	P4	P48	P5	N42	A05	A05(L)	A10(L)	A101(L)	A12	A12(L)
EPO11.5				1000						
EPO13	1550						6700	6700	7700	
EPO39		8400								

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. Customized dimensions are available.

## Type : EP Cores

Ordering Code:

P4

Material  
材質

EP7


Core Size  
品名

G□


Gapped AL Value

Shape:


Type:1

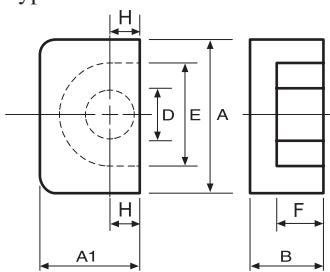


Type:2

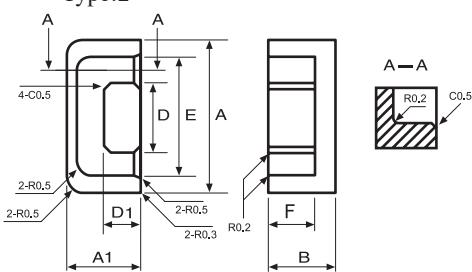


Type:3

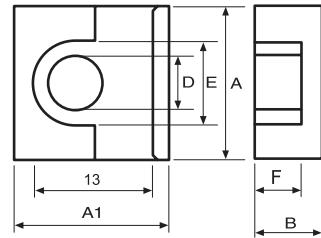


Type:4

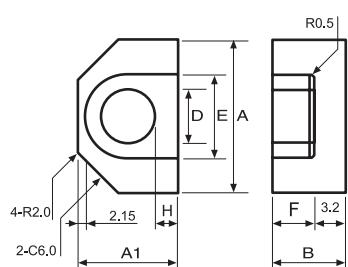

Type:5

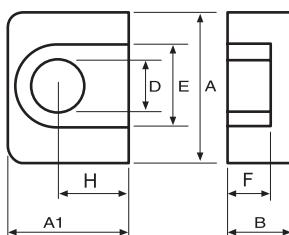

Type:6

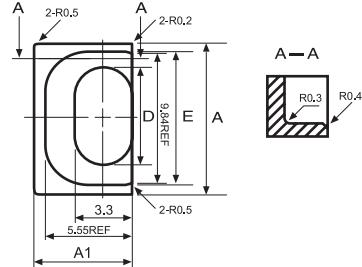

## DIMENSIONS

CORES	DIMENSIONS (mm)							Type
	A	A1	B	D	E	F	H	
<b>EP5</b>	$6.00 \pm 0.15$	$3.80 \pm 0.10$	$2.80 \pm 0.05$	$1.70 \pm 0.10$	$4.40 \pm 0.15$	$2.00 \pm 0.10$	—	1
<b>EP5-1</b>	$6.00 \pm 0.15$	$3.80 \pm 0.10$	$3.40 \pm 0.05$	$1.70 \pm 0.10$	$4.40 \pm 0.15$	$2.60 \pm 0.10$	—	1
<b>EP5.4</b>	$5.40 \pm 0.10$	$3.40 \pm 0.08$	$2.80 \pm 0.10$	$1.55 \pm 0.06$	$4.00 \pm 0.15$	$2.00 \pm 0.10$	$1.57$ (ref)	1
<b>EP7</b>	$9.20 \pm 0.20$	$6.35 \pm 0.15$	$3.75^{+0.00}_{-0.10}$	$3.30 \pm 0.10$	$7.40 \pm 0.20$	$2.60 \pm 0.10$	—	1
<b>EP7-1</b>	$9.20 \pm 0.20$	$6.35 \pm 0.15$	$4.75 \pm 0.05$	$3.30 \pm 0.10$	$7.40 \pm 0.20$	$3.60 \pm 0.10$	$1.70$ (ref)	1
<b>EP7A</b>	$9.20 \pm 0.20$	$6.35 \pm 0.15$	$3.75^{+0.00}_{-0.10}$	$3.30 \pm 0.10$	$7.40 \pm 0.20$	$2.60 \pm 0.10$	$1.70 \pm 0.10$	1
<b>EP7C</b>	$9.40 \pm 0.20$	$6.50 \pm 0.15$	$3.70 \pm 0.10$	$3.30 \pm 0.10$	7.40min	$2.60 \pm 0.10$	—	1
<b>EP10</b>	$11.50 \pm 0.30$	$7.65 \pm 0.20$	$5.20^{+0.00}_{-0.10}$	$3.30 \pm 0.15$	$9.40 \pm 0.20$	$3.70 \pm 0.10$	—	1
<b>EP11.8</b>	$11.80 \pm 0.30$	$7.70 \pm 0.20$	$5.10 \pm 0.20$	$3.30 \pm 0.20$	$9.70 \pm 0.20$	$3.80 \pm 0.20$	—	1
<b>EP13</b>	$12.50 \pm 0.30$	$8.80 \pm 0.20$	$6.50^{+0.00}_{-0.15}$	$4.35 \pm 0.15$	$10.10 \pm 0.20$	$4.60 \pm 0.10$	—	1
<b>EP13.3</b>	$13.30 \pm 0.20$	$5.50 \pm 0.15$	$6.50 \pm 0.10$	$5.60 \pm 0.10$	$10.80 \pm 0.20$	$4.55 \pm 0.10$	—	2
<b>EP14.4/14.5</b>	$14.40 \pm 0.25$	$9.70 \pm 0.25$	$7.25 \pm 0.15$	$4.35 \pm 0.15$	$12.00 \pm 0.20$	$5.35 \pm 0.10$	$2.50$ (ref)	1
<b>EP15.2A</b>	$11.30 \pm 0.20$	$6.25 \pm 0.15$	$7.60 \pm 0.10$	$5.65 \pm 0.15$	9.80min	$6.55 \pm 0.15$	—	6
<b>EP16</b>	$16.00 \pm 0.25$	$16.00 \pm 0.25$	$4.40 \pm 0.10$	$7.89 \pm 0.20$	$13.00 \pm 0.25$	$2.40 \pm 0.20$	—	3
<b>EP17</b>	$18.00 \pm 0.40$	$11.00 \pm 0.20$	$8.40 \pm 0.20$	$5.68 \pm 0.18$	$12.00 \pm 0.40$	$5.65 \pm 0.15$	—	1
<b>EP25.6</b>	$25.60 \pm 0.50$	$21.40 \pm 0.40$	$17.45 \pm 0.20$	$9.70 \pm 0.20$	$19.00 \pm 0.30$	$14.25 \pm 0.20$	$9.75 \pm 0.20$	4
<b>EP31</b>	$31.00 \pm 0.50$	$30.00 \pm 0.45$	$9.50 \pm 0.15$	$14.60 \pm 0.30$	$25.80 \pm 0.50$	$5.50 \pm 0.15$	$15.00$ (ref)	5

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	Ci(mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>EP5</b>	3.20	9.70	3.00	28.70	0.46
<b>EP5-1</b>	3.60	10.80	3.00	32.40	0.46
<b>EP5.4</b>	3.71	9.28	2.50	23.20	0.40
<b>EP7</b>	1.52	15.70	10.30	162.00	1.42
<b>EP7-1</b>	1.68	17.96	10.66	191.45	1.42
<b>EP7A</b>	1.52	15.70	10.30	161.71	1.38
<b>EP7C</b>	1.44	15.37	10.67	164.00	1.44
<b>EP10</b>	1.70	19.20	11.30	217.00	2.92
<b>EP11.8</b>	1.77	19.63	11.10	217.90	3.10
<b>EP13</b>	1.24	24.20	19.50	472.00	4.86
<b>EP13.3</b>	1.40	24.42	17.35	423.68	3.14
<b>EP14.4/14.5</b>	1.44	27.56	19.14	527.50	6.10
<b>EP15.2A</b>	2.80	34.18	12.18	416.32	3.36
<b>EP16</b>	0.37	19.75	54.09	1068.05	9.54
<b>EP17</b>	0.84	28.70	34.00	970.00	11.60
<b>EP25.6</b>	0.67	59.98	89.43	5364.52	51.80
<b>EP31</b>	0.22	42.08	190.89	8032.65	54.90

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL + 30% - 20% (nH/N <sup>2</sup> )						AL + 40% - 30% (nH/N <sup>2</sup> )				
	P4	P47	P5	N42	A05	A05(L)	A101	A101(L)	A121	A121(L)	A151(L)
<b>EP5</b>	400 ± 25%	450 ± 25%	380 ± 25%	500 ± 25%	530 ± 25%		600	1900	650	2050	1582min
<b>EP5-1</b>	380 ± 25%	390 ± 25%		450 ± 25%				1850			
<b>EP5.4</b>		330									
<b>EP7</b>	1100	1200	1000	1350 ± 25%	1600 ± 25%	3500	2050	5200	2100	3900min	4430min
<b>EP7-1</b>	1000 ± 25%	1100 ± 25%	900 ± 25%	1380	1450 ± 25%		1980				
<b>EP7A</b>								3900min			
<b>EP7C</b>	1100										
<b>EP10</b>	1000	1110 ± 25%	950	1270 ± 25%	1600 ± 25%	3400	2050 ± 30%	4800	2150	3950min	4400min
<b>EP11.8</b>											4200min
<b>EP13</b>	1600	1780 ± 25%	1430		2800	4400	3300	7000	3500	5800min	7000min
<b>EP13.3</b>											5850min
<b>EP14.4/14.5</b>		1750 (P45)									
<b>EP15.2A</b>											
<b>EP16</b>	4500										
<b>EP17</b>	2500	2650 ± 25%	2300 ± 25%	3060 ± 25%	3970 ± 25%			11000		12600	14000
<b>EP25.6</b>	3500										
<b>EP31</b>	9300 ± 25%	10500 ± 25%		12800 ± 25%							

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : CUT Cores


Ordering Code: P4  
 ─────────  
 Material  Material  
 品質      材質

CUT14x8  
 ─────────  
 Core Size  Core Size  
 品名      品名


G□  
 ─────────  
 Gapped AL Value

Shape:


Type:1

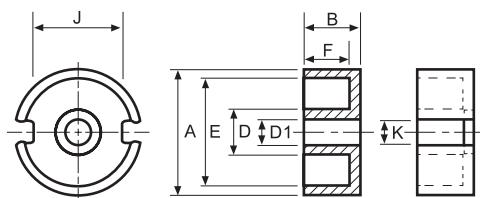


Type:2

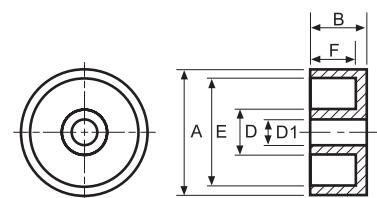


Type:3

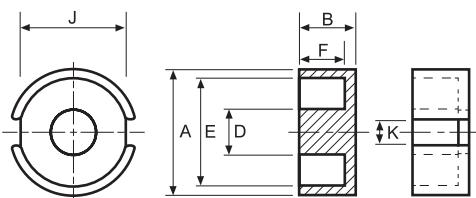

Type:4

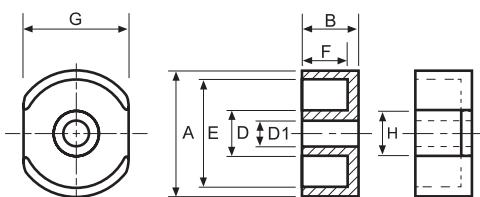

Type:5

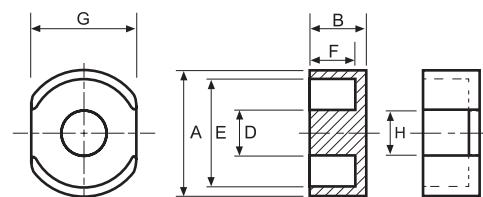

### DIMENSIONS

CORES	DIMENSIONS (mm)										Type
	A	B	D	E	F	J	K	D1	G	H	
<b>CUT14x8</b>	14.00 ± 0.25	4.18 ± 0.08	6.09max	11.60min	2.79min	9.50 ± 0.60	3.30 ± 0.60	—	9.55 ± 0.15	7.60min	3 + 5
<b>CUT14x8CH</b>	14.00 ± 0.25	4.18 ± 0.08	6.09max	11.60min	2.79min	9.50 ± 0.60	3.30 ± 0.60	3.10 ± 0.07	9.55 ± 0.15	7.60min	1 + 4
<b>CUT18x11CH</b>	17.90 ± 0.30	5.30 ± 0.07	7.40 ± 0.15	15.25 ± 0.25	3.80 ± 0.10	11.55 ± 0.30	3.20 ± 0.30	3.02 ± 0.07	11.90 ± 0.20	10.50min	1 + 4
<b>CUT23x11CH</b>	22.86 ± 0.45	5.53 ± 0.25	9.90max	17.93min	3.63min	—	—	5.08 ± 0.10	15.24 ± 0.25	13.21min	2 + 4
<b>DCUT5.7</b>	5.70 ± 0.15	1.60 ± 0.10	2.40 ± 0.10	4.70 ± 0.20	1.03 ± 0.10	—	—	—	4.13 ± 0.15	2.75min	5
<b>DCUT14x8</b>	14.00 ± 0.25	4.18 ± 0.06	6.09max	11.60min	2.79min	—	—	—	9.55 ± 0.15	7.60min	5
<b>DCUT14x8CH</b>	14.00 ± 0.25	4.18 ± 0.08	6.09max	11.60min	2.79min	—	—	3.10 ± 0.07	9.55 ± 0.15	7.60min	4
<b>DCUT18x11</b>	17.90 ± 0.30	5.30 ± 0.10	7.40 ± 0.15	15.25 ± 0.25	3.80 ± 0.10	—	—	—	11.90 ± 0.20	10.50min	5
<b>DCUT18x11CH</b>	17.90 ± 0.30	5.30 ± 0.07	7.40 ± 0.15	15.25 ± 0.25	3.80 ± 0.10	—	—	3.02 ± 0.07	11.90 ± 0.20	10.50min	4
<b>DCUT21.6</b>	21.60 ± 0.40	4.10 ± 0.25	9.40 ± 0.20	17.50 ± 0.30	2.35 ± 0.15	—	—	—	15.20 ± 0.25	10.95ref	5
<b>DCUT21.6Ax13.4CH</b>	21.60 ± 0.30	6.70 ± 0.10	9.20 ± 0.20	18.20 ± 0.20	4.75 ± 0.15	—	—	4.55 ± 0.10	14.80 ± 0.20	—	4
<b>DCUT22.9x15.2</b>	22.90 ± 0.45	5.55 ± 0.15	9.75 ± 0.15	18.25 ± 0.30	3.75 ± 0.15	—	—	—	15.20 ± 0.25	10.95ref	5
<b>DCUT30</b>	30.20 ± 0.50	9.50 ± 0.10	12.50 ± 0.20	24.70 ± 0.40	6.60 ± 0.10	—	—	—	20.50 ± 0.25	16.80 ± 0.25	5
<b>DCUT30Ax14</b>	30.00 ± 0.50	7.00 ± 0.10	13.20 ± 0.20	25.70 ± 0.40	4.70 ± 0.15	—	—	—	20.30 ± 0.25	17.80min	5
<b>DCUT33.2x11</b>	33.20 ± 0.50	5.56 ± 0.15	13.50 ± 0.25	26.60 ± 0.40	3.25 ± 0.15	—	—	—	23.70 ± 0.40	≥ 18.20	5
<b>DCUT33.2x12</b>	33.20 ± 0.50	6.10 ± 0.15	13.50 ± 0.20	26.60 ± 0.40	3.20 ± 0.15	—	—	—	23.70 ± 0.30	18.20min	5
<b>DCUT33.2Ax18.9</b>	33.20 ± 0.50	9.45 ± 0.15	13.40 ± 0.20	26.80 ± 0.40	6.65 ± 0.15	—	—	—	23.70 ± 0.30	18.20min	5
<b>DCUT40x13.5</b>	39.80 ± 0.50	6.75 ± 0.15	16.00 ± 0.25	33.30 ± 0.50	4.35 ± 0.15	—	—	—	28.30 ± 0.35	21.00min	5

\* CUT Core = 1 PC POT Core + 1 PC CUT Core.

\* DCUT Core = 2 PCS CUT Cores.

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>i</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>CUT14x8</b>	0.71	20.90	29.20	610.00	2.91
<b>CUT14x8CH</b>	0.91	21.10	23.30	492.00	2.66
<b>CUT18x11CH</b>	0.67	27.20	40.60	1110.00	5.40
<b>CUT23x11CH</b>	0.47	28.60	61.00	1744.60	11.94
<b>DCUT5.7</b>	1.86	8.81	4.74	41.78	0.20
<b>DCUT14x8</b>	0.70	21.00	29.90	627.90	2.91
<b>DCUT14x8CH</b>	1.02	22.50	22.00	495.00	2.66
<b>DCUT18x11</b>	0.72	29.75	41.14	1224.00	5.52
<b>DCUT18x11CH</b>	0.78	27.20	35.00	952.00	6.00
<b>DCUT21.6</b>	0.42	25.82	61.11	1577.86	8.50
<b>DCUT21.6Ax13.4CH</b>	0.69	36.27	52.83	1916.14	4.90
<b>DCUT22.9x15.2</b>	0.54	35.10	64.90	2278.08	12.14
<b>DCUT30</b>	0.45	50.20	111.00	5572.20	30.96
<b>DCUT30Ax14</b>	0.40	41.98	104.93	4404.96	11.21
<b>DCUT33.2x11</b>	0.28	36.70	131.90	4836.40	25.10
<b>DCUT33.2x12</b>	0.27	39.01	146.09	5698.97	37.12
<b>DCUT33.2Ax18.9</b>	0.36	52.62	144.58	7607.80	39.20
<b>DCUT40x13.5</b>	0.27	44.00	161.00	7084.00	40.60

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										AL + 40% - 30% (nH/N <sup>2</sup> )		
	P4	P45	P451	P452	P47	P53	P61	N4	N42	N43	A05	A10(L)	A121(L)
<b>CUT14x8</b>	2180	2650			2600			2180				5490 ± 30%	6220 ± 30%
<b>CUT14x8CH</b>	1650							1650				2500+30%-25%	8000
<b>CUT18x11CH</b>	2500				3100			2500	3600			4800+30%-25%	10000
<b>CUT23x11CH</b>	4600												
<b>DCUT5.7</b>					630								
<b>DCUT14x8</b>	2000				2430								
<b>DCUT14x8CH</b>													
<b>DCUT18x11</b>					2800								
<b>DCUT18x11CH</b>	2500				2800								
<b>DCUT21.6</b>					4900								
<b>DCUT21.6Ax13.4CH</b>	3400												
<b>DCUT22.9x15.2</b>	3600				4150								
<b>DCUT30</b>	5500				6400			5500					
<b>DCUT30Ax14</b>	5200				6000								
<b>DCUT33.2x11</b>					7000								
<b>DCUT33.2x12</b>					8600								
<b>DCUT33.2Ax18.9</b>					6400 (P48)								
<b>DCUT40x13.5</b>	8500												

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.


## Type : POT Cores (1)

Ordering Code:


P4	POT14x8	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:


Type:1

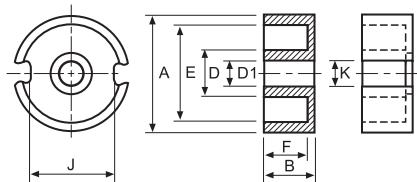


Type:2

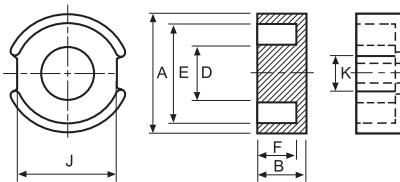

Type:3

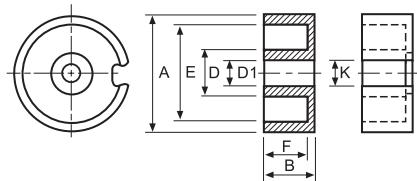

Type:4

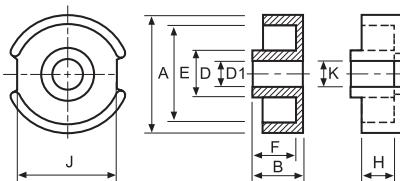

## ■ DIMENSIONS

CORES	DIMENSIONS (mm)									Type
	A	B	D	E	F	J	K	D1	H	
POT3.35x2.6	3.30 <sup>+0.15</sup> <sub>-0.05</sub>	1.30 ± 0.10	1.10 <sup>+0.12</sup> <sub>-0.08</sub>	2.60 <sup>+0.15</sup> <sub>-0.05</sub>	0.85 <sup>+0.20</sup> <sub>-0.00</sub>	—	—	—	—	2
POT5.5x8	5.50 <sup>+0.00</sup> <sub>-0.30</sub>	4.00 <sup>+0.00</sup> <sub>-0.15</sub>	2.35 ± 0.10	4.50 <sup>+0.00</sup> <sub>-0.30</sub>	3.28 ± 0.10	4.29 ± 0.15	1.50 ± 0.10	—	—	2
POT5.8x3.4CH	5.80 <sup>+0.00</sup> <sub>-0.25</sub>	1.70 <sup>+0.00</sup> <sub>-0.15</sub>	2.50 <sup>+0.00</sup> <sub>-0.15</sub>	4.50 <sup>+0.20</sup> <sub>-0.00</sub>	1.10 <sup>+0.10</sup> <sub>-0.00</sub>	3.50 ± 0.15	1.50 ± 0.10	0.95 <sup>+0.10</sup> <sub>-0.00</sub>	—	1
POT7.35x7CH	7.35 ± 0.15	3.50 ± 0.10	3.00 ± 0.10	6.00 ± 0.15	2.50 ± 0.10	—	2.10 ± 0.30	1.00 ± 0.10	—	3
POT7.35A/3.6CH	7.35 <sup>+0.00</sup> <sub>-0.40</sub>	3.60 ± 0.15	3.00 <sup>+0.00</sup> <sub>-0.20</sub>	5.80 <sup>+0.00</sup> <sub>-0.30</sub>	2.80 <sup>+0.30</sup> <sub>-0.00</sub>	4.35 ± 0.20	1.30 <sup>+0.40</sup> <sub>-0.00</sub>	1.05 <sup>+0.20</sup> <sub>-0.00</sub>	—	4
POT7.6B/6.9CH	7.60 ± 0.15	3.45 ± 0.25	2.55 ± 0.15	6.20 ± 0.15	2.35 ± 0.25	5.35 ± 0.40	1.20 ± 0.30	1.12 ± 0.10	—	1
POT8.8	9.00 ± 0.20	4.60 ± 0.15	3.00 ± 0.10	7.40 ± 0.20	3.10 ± 0.15	—	1.80 ± 0.25	2.60 ± 0.10	—	6
POT8.85x7CH	9.00 <sup>+0.00</sup> <sub>-0.30</sub>	3.50 ± 0.10	3.80 ± 0.10	7.45 <sup>+0.15</sup> <sub>-0.10</sub>	2.50 ± 0.10	5.65 ± 0.15	2.10 ± 0.30	2.00 <sup>+0.10</sup> <sub>-0.00</sub>	—	1
POT9x5	9.15 ± 0.15	2.65 ± 0.05	3.80 ± 0.10	7.62 <sup>+0.13</sup> <sub>-0.12</sub>	1.87 <sup>+0.08</sup> <sub>-0.07</sub>	5.65 ± 0.15	2.10 ± 0.30	—	—	2
POT9x5CH	9.15 ± 0.15	2.65 ± 0.05	3.80 ± 0.10	7.62 <sup>+0.13</sup> <sub>-0.12</sub>	1.87 <sup>+0.08</sup> <sub>-0.07</sub>	5.65 ± 0.15	2.10 ± 0.30	1.95 ± 0.05	—	4
POT9x5ACH	9.00 ± 0.15	3.50 ± 0.10	3.80 ± 0.10	7.63 ± 0.13	2.50 ± 0.05	5.65 ± 0.15	2.10 ± 0.30	2.00 <sup>+0.10</sup> <sub>-0.00</sub>	—	4
POT11x7	11.10 ± 0.20	3.30 <sup>+0.08</sup> <sub>-0.07</sub>	4.60 ± 0.10	9.20 ± 0.20	2.30 <sup>+0.08</sup> <sub>-0.07</sub>	6.80 ± 0.25	2.20 ± 0.30	—	—	2
POT11x7CH	11.10 ± 0.22	3.30 <sup>+0.08</sup> <sub>-0.07</sub>	4.60 ± 0.10	9.20 ± 0.20	2.30 <sup>+0.08</sup> <sub>-0.07</sub>	6.80 ± 0.25	2.20 ± 0.30	2.10 ± 0.10	—	4
POT13.8	13.80 ± 0.20	5.50 ± 0.15	5.20 ± 0.15	11.50 ± 0.20	3.60 ± 0.15	—	2.70 ± 0.30	4.70 ± 0.15	—	6
POT14x8	14.00 ± 0.25	4.18 ± 0.08	5.99max	11.60min	2.79min	9.50 ± 0.60	3.30 ± 0.60	—	—	1
POT14x8CH	14.00 ± 0.25	4.18 ± 0.08	6.09max	11.60min	2.79min	9.50 ± 0.60	3.30 ± 0.60	3.10 ± 0.07	—	1
POT14Dx8CH	14.00 ± 0.25	4.20 ± 0.15	6.00 ± 0.15	11.85 ± 0.25	2.90 ± 0.20	9.50 ± 0.30	3.20 ± 0.30	3.00 ± 0.15	1.70 ± 0.20	4

\* POT Core = 1 PC POT Core + 1 PC POT Core.

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
POT3.35x2.6	3.68	4.80	1.30	6.25	0.07
POT5.5x8	3.17	16.48	5.19	85.49	0.48
POT5.8x3.4CH	1.68	7.90	4.70	37.00	0.24
POT7.35x7CH	1.73	14.16	8.17	115.64	0.87
POT7.35A/3.6CH	1.98	13.27	6.71	89.04	0.76
POT7.6B/6.9CH	2.08	11.87	5.71	67.89	0.92
POT8.8	1.86	17.80	9.58	170.60	1.44
POT8.85x7CH	1.35	14.63	10.85	158.62	1.05
POT9x5	1.06	13.52	12.76	172.52	0.94
POT9x5CH	1.25	12.20	9.80	119.56	0.86
POT9x5ACH	1.39	14.96	10.77	161.00	1.30
POT11x7	0.86	16.30	19.00	309.00	2.12
POT11x7CH	0.96	15.50	16.20	251.00	2.00
POT13.8	1.08	34.00	31.30	1065.00	4.30
POT14x8	0.70	21.00	29.90	628.00	3.60
POT14x8CH	0.79	19.80	25.00	495.00	3.14
POT14Dx8CH	0.56	21.13	37.84	799.67	3.00

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										AL + 40% - 30% (nH/N <sup>2</sup> )		
	P4	P45	P451	P452	P47	P53	P61	N4	N42	N43	A05	A10(L)	A121(L)
POT3.35x2.6										110			
POT5.5x8	560												
POT5.8x3.4CH						560				350+30%-20%			
POT7.35x7CH	860												
POT7.35A/3.6CH													
POT7.6B/6.9CH	600												
POT8.8										400			
POT8.85x7CH										960			
POT9x5	1300				1400			1300	1600			5800 ± 30%	
POT9x5CH	1200				1300			1200	1350				
POT9x5ACH	1100							1100					
POT11x7	2000				1950			2000	2310		2890		10000
POT11x7CH	1800				2000			1800			2500		6220min
POT13.8										700			
POT14x8	2400				2700			2400	2620		3500		
POT14x8CH	2000				2100			2000	2300		3500+30%-25%	9800	8500min
POT14Dx8CH										520			

Remark:



1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : POT Cores (2)


Ordering Code: P4  
 Material  Material  
 Core Size  Core Size  
 Gapped AL Value  Gapped AL Value

Shape:


Type:5

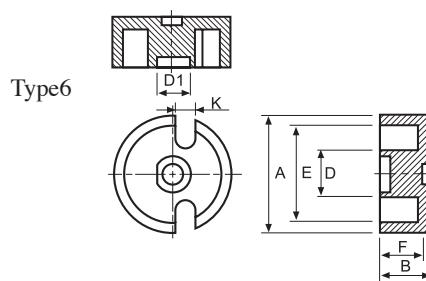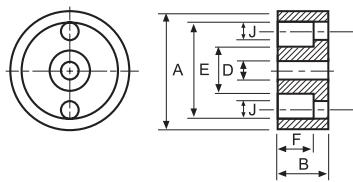

Type:7

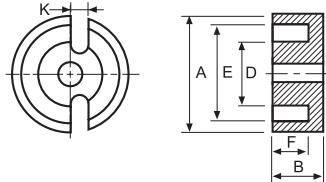

Type:8

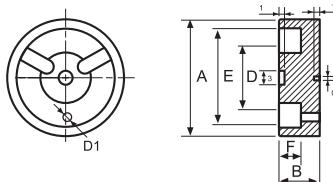

### DIMENSIONS

CORES	DIMENSIONS (mm)									Type
	A	B	D	E	F	J	K	D1	H	
POT18x10.5	18.00 ± 0.40	5.25 ± 0.10	7.40 ± 0.15	15.20 ± 0.25	3.80 ± 0.15	11.55 ± 0.30	4.15 ± 0.30	—	—	1
POT18x11CH	17.90 ± 0.30	5.30 <sup>+0.08</sup> <sub>-0.07</sub>	7.40 ± 0.15	15.25 ± 0.25	3.80 ± 0.10	11.55 ± 0.30	3.20 ± 0.30	3.02 ± 0.07	—	1
POT18x11ACH	17.90 ± 0.30	5.30 <sup>+0.08</sup> <sub>-0.07</sub>	7.40 ± 0.15	15.25 ± 0.25	3.80 ± 0.10	11.55 ± 0.30	3.80 ± 0.30	3.02 ± 0.10	—	1
POT18Dx11	18.10 ± 0.40	5.30 ± 0.15	7.40 ± 0.15	15.20 ± 0.30	4.00 ± 0.15	13.80 ± 0.20	5.50 ± 0.40	—	—	2
POT24	24.00 ± 0.40	10.10 <sup>+0.20</sup> <sub>-0.00</sub>	10.40 <sup>+0.00</sup> <sub>-0.30</sub>	20.40 ± 0.35	5.20 <sup>+0.30</sup> <sub>-0.00</sub>	—	3.00 <sup>+0.50</sup> <sub>-0.00</sub>	—	—	8
POT24.3x17.6CH	24.30 ± 0.50	8.90 <sup>+0.00</sup> <sub>-0.45</sub>	10.88 ± 0.30	20.83 ± 0.50	5.90 <sup>+0.40</sup> <sub>-0.00</sub>	16.80 ± 0.35	3.95 ± 0.25	5.51 ± 0.20	—	1
POT24.8	24.80 <sup>+0.75</sup> <sub>-0.00</sub>	10.00 ± 0.15	11.50 ± 0.20	21.00 ± 0.35	5.10 ± 0.15	—	3.00 ± 0.30	—	—	7
POT26x16CH	26.00 <sup>+0.00</sup> <sub>-1.00</sub>	8.15 <sup>+0.00</sup> <sub>-0.20</sub>	11.50 <sup>+0.00</sup> <sub>-0.40</sub>	21.20 <sup>+0.80</sup> <sub>-0.00</sub>	5.50 <sup>+0.20</sup> <sub>-0.00</sub>	17.70 <sup>+0.00</sup> <sub>-0.70</sub>	3.90 <sup>+0.60</sup> <sub>-0.00</sub>	5.40 <sup>+0.20</sup> <sub>-0.00</sub>	0.60 <sup>+0.20</sup> <sub>-0.00</sub>	1
POT30CH	30.00 ± 1.20	9.50 ± 0.30	12.30 ± 0.50	25.40 ± 0.80	6.60 ± 0.30	20.25 ± 0.50	3.80 ± 0.50	5.50 ± 0.30	—	1
POT33.5x21CH	33.50 ± 0.50	10.60 ± 0.20	15.50 ± 0.30	30.60 ± 0.50	7.50 ± 0.30	5.00 ± 0.50	—	5.50 ± 0.20	—	5
POT35.5x22CH	35.50 ± 0.50	10.90 ± 0.20	15.95 ± 0.25	30.30 ± 0.40	7.50 ± 0.20	26.80 ± 0.50	4.00 ± 0.30	5.65 ± 0.15	—	1
POT48CH	47.80 ± 0.90	15.60 ± 0.30	19.90 ± 0.50	40.40 ± 0.90	10.70 ± 0.40	33.80 ± 0.50	4.30 ± 0.50	7.60 ± 0.30	—	1
POT68ACH	68.00 <sup>+0.50</sup> <sub>-2.50</sub>	14.50 <sup>+0.00</sup> <sub>-0.60</sub>	29.50 <sup>+0.50</sup> <sub>-1.00</sub>	58.00 ± 0.80	9.00 <sup>+0.60</sup> <sub>-0.00</sub>	8.10 ± 0.50	—	9.00 ± 0.50	—	5
POT69x28CH	69.00 ± 1.20	14.00 ± 0.20	29.00 ± 0.50	58.40 <sup>+1.00</sup> <sub>-0.80</sub>	9.30 ± 0.30	48.20 ± 0.80	10.50 ± 0.50	8.50 ± 0.50	—	1

\* POT Core = 1 PC POT Core + 1 PC POT Core.



## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
POT18x10.5	0.57	26.32	46.25	1217.30	7.20
POT18x11CH	0.60	25.80	43.30	1120.00	6.66
POT18x11ACH	0.78	27.20	43.10	1172.32	6.60
POT18Dx11	0.63	28.81	46.00	1325.17	7.00
POT24	0.34	36.91	109.50	4042.07	28.04
POT24.3x17.6CH	0.51	52.73	103.34	5448.97	19.90
POT24.8	0.52	72.35	139.70	10107.40	32.22
POT26x16CH	0.40	37.20	93.00	3460.00	21.58
POT30CH	0.46	57.63	125.68	7443.48	29.16
POT33.5x21CH	0.39	73.61	188.64	13885.44	46.40
POT35.5x22CH	0.30	70.47	237.15	16712.00	83.90
POT48CH	0.29	123.65	423.00	53167.16	154.48
POT68ACH	0.16	159.93	987.56	157940.41	290.40
POT69x28CH	0.13	78.49	624.89	49045.32	317.05

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										AL + 40% - 30% (nH/N <sup>2</sup> )		
	P4	P45	P451	P452	P47	P53	P61	N4	N42	N43	A05	A10(L)	A121(L)
POT18x10.5								3500					
POT18x11CH	2850				3600			2850	4155	4600+30%-25%	12600		
POT18x11ACH	2850	3300			3230								
POT18Dx11	3100												
POT24									2400				
POT24.3x17.6CH	4200				4900								
POT24.8									1800				
POT26x16CH								4700+30%-20%					
POT30CH	4500												
POT33.5x21CH	6800												
POT35.5x22CH	7500												
POT48CH	10000												
POT68ACH	10500												
POT69x28CH	15000												

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.


## Type : PEI Cores (Planner Core)

Ordering Code:


P4	PEI14	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:


Type:1

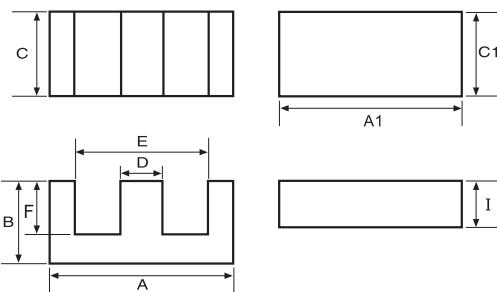


Type:2

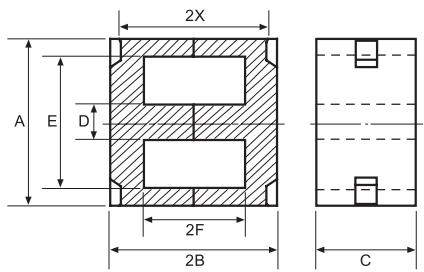


Type:3

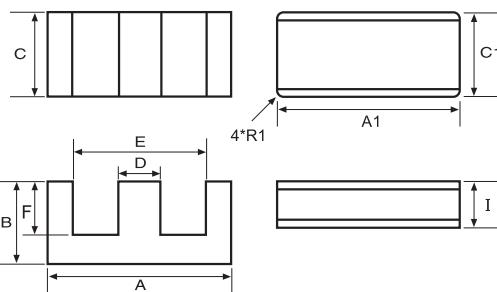

Type:4

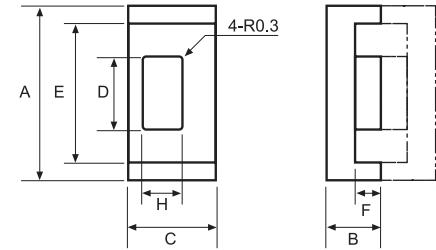

Type:5

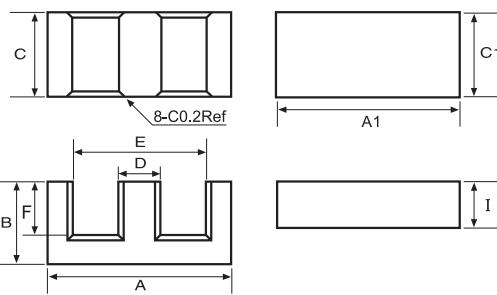

## DIMENSIONS

CORES	DIMENSIONS (mm)											Type
	A	B	C	D	E	F	H	A1	C1	I	X	
<b>PEI6.2/2.6/1.6/1</b>	6.20 ± 0.20	1.60 ± 0.08	2.60 ± 0.10	1.20 ± 0.10	4.70 ± 0.15	1.60 ± 0.08	—	6.20 ± 0.20	2.60 ± 0.10	1.00 ± 0.08	—	5
<b>PEE14</b>	14.00 ± 0.30	3.50 ± 0.10	5.00 ± 0.10	3.00 ± 0.05	11.00 ± 0.25	2.00 ± 0.10	—	—	—	—	—	1
<b>PEI14</b>	14.00 ± 0.30	3.50 ± 0.10	5.00 ± 0.10	3.00 ± 0.05	11.00 ± 0.25	2.00 ± 0.10	—	14.00 ± 0.30	5.00 ± 0.10	1.50 ± 0.05	—	1
<b>PEE16.6</b>	16.60 ± 0.40	3.90 ± 0.15	5.15 ± 0.30	3.70 ± 0.30	12.50 ± 0.40	1.40 ± 0.15	—	—	—	—	—	1
<b>PEE18</b>	18.00 ± 0.35	4.00 ± 0.10	10.00 ± 0.20	4.00 ± 0.10	14.00 ± 0.30	2.00 ± 0.10	—	—	—	—	3.30 ± 0.15	2
<b>PEI18</b>	18.00 ± 0.35	4.00 ± 0.15	10.00 ± 0.20	4.00 ± 0.10	14.00 ± 0.30	2.00 ± 0.10	—	18.00 ± 0.35	10.00 ± 0.20	2.00 ± 0.05	3.30 ± 0.10	E : 2 I : 1
<b>PEE22</b>	21.80 ± 0.40	5.70 ± 0.10	15.80 ± 0.30	5.00 ± 0.10	16.80 ± 0.40	3.20 ± 0.10	—	—	—	—	—	1
<b>PEI22</b>	21.80 ± 0.40	5.70 ± 0.10	15.80 ± 0.30	5.00 ± 0.10	16.80 ± 0.40	3.20 ± 0.10	—	21.80 ± 0.40	15.80 ± 0.30	2.50 ± 0.05	—	1
<b>PEE31</b>	31.00 ± 0.60	20.50 ± 0.30	31.00 ± 0.50	11.00 ± 0.30	20.50min	15.00 ± 0.30	—	—	—	—	—	1
<b>PEI31.75</b>	31.75 ± 0.65	6.35 ± 0.15	20.32 ± 0.40	6.35 ± 0.15	24.90min	3.18 ± 0.20	—	31.75 ± 0.65	20.32 ± 0.40	3.28 ± 0.20	—	3
<b>PEE33.6</b>	33.60 ± 0.40	4.60 ± 0.20	10.00 ± 0.20	12.00 ± 0.20	27.40 ± 0.40	2.10 ± 0.20	5.00 ± 0.20	—	—	—	—	4
<b>PEE38.1</b>	38.10 ± 0.76	8.26 ± 0.13	25.40 ± 0.51	7.60 ± 0.20	30.23min	4.45 ± 0.13	—	—	—	—	—	1
<b>PEI38.1</b>	38.10 ± 0.76	8.26 ± 0.13	25.40 ± 0.51	7.60 ± 0.20	30.23min	4.45 ± 0.13	—	38.10 ± 0.76	25.40 ± 0.51	3.81 ± 0.13	—	1

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>PEI6.2/2.6/1.6/1</b>	1.81	7.43	4.10	30.47	0.17
<b>PEE14</b>	1.43	20.70	14.50	300.00	1.40
<b>PEI14</b>	1.16	16.70	14.50	240.00	1.22
<b>PEE16.6</b>	0.93	21.14	22.83	482.68	2.54
<b>PEE18</b>	0.62	24.30	39.50	960.00	4.80
<b>PEI18</b>	0.50	20.30	40.80	830.00	4.29
<b>PEE22</b>	0.41	32.50	78.50	2550.00	13.00
<b>PEI22</b>	0.33	26.10	78.50	2040.00	10.57
<b>PEE31</b>	0.27	86.73	326.00	28280.00	137.86
<b>PEI31.75</b>	0.27	35.10	130.00	4563.00	23.50
<b>PEE33.6</b>	0.73	32.68	44.83	1465.04	10.50
<b>PEE38.1</b>	0.27	52.51	195.38	10260.00	51.20
<b>PEI38.1</b>	0.22	43.58	194.58	8477.54	43.15

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										
	P4	P41	P42	P45	P451	P452	P47	P48	P5	P51	P61
<b>PEI6.2/2.6/1.6/1</b>										440	
<b>PEE14</b>	1350	1300	1140				1530		1150	800	
<b>PEI14</b>	1250	1220		1550					1150		
<b>PEE16.6</b>							2025				
<b>PEE18</b>	3300	3280	2280	3450			3400		2850	1990	
<b>PEI18</b>	3900	3810					4200		3300	2350	
<b>PEE22</b>	5400						5600	5400		3145	
<b>PEI22</b>	6450	6280	4550				6200		5500	3740	
<b>PEE31</b>	8700										
<b>PEI31.75</b>	7200	7000					8300				
<b>PEE33.6</b>	3000										
<b>PEE38.1</b>	7520 (ref)										
<b>PEI38.1</b>	8580 (ref)										

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. Customized dimensions are available.


## Type : PQ Cores

Ordering Code:


P4	PQ20/10	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:


Type:1




Type:2




Type:3

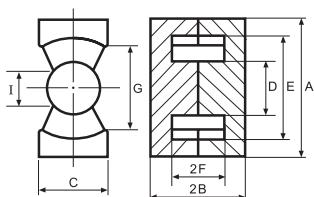


Type:4

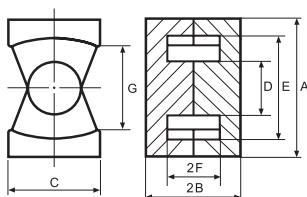


Type:5

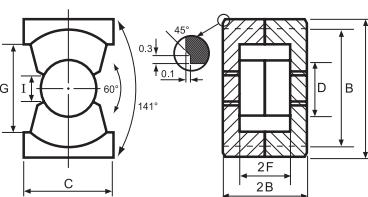


Type:6

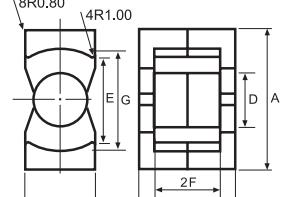


Type:7

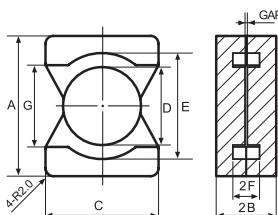


Type:8

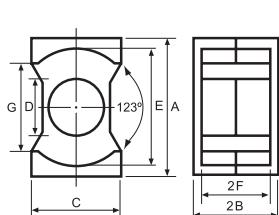

Type:9

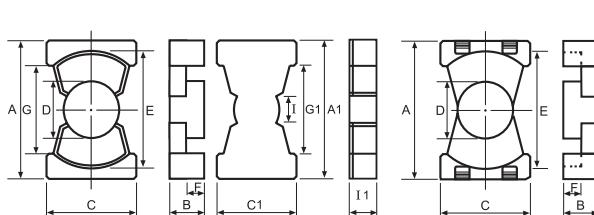

Type:10



## DIMENSIONS

CORES	DIMENSIONS (mm)												Type	
	A	B	C	D	E	F	G	I	A1	C1	D1	G1	I1	
<b>PQ20/16</b>	20.50 ± 0.40	8.10 ± 0.10	14.00 ± 0.40	8.70 ± 0.30	18.00 ± 0.40	5.15 ± 0.15	12.00min	4.00min	—	—	—	—	—	1
<b>PQ20/20</b>	20.50 ± 0.40	10.10 ± 0.10	14.00 ± 0.40	8.70 ± 0.30	18.00 ± 0.40	7.15 ± 0.15	12.00min	4.00min	—	—	—	—	—	1
<b>PQ20A/16</b>	21.50 ± 0.40	8.10 ± 0.10	14.00 ± 0.40	8.70 ± 0.30	19.00 ± 0.40	5.15 ± 0.15	13.00min	4.00min	—	—	—	—	—	1
<b>PQ26/20</b>	26.50 ± 0.45	10.08 ± 0.12	19.00 ± 0.45	12.00 ± 0.20	22.50 ± 0.45	5.75 ± 0.15	15.50min	5.25min	—	—	—	—	—	1
<b>PQ26/25</b>	26.50 ± 0.45	12.38 ± 0.12	19.00 ± 0.45	12.00 ± 0.20	22.50 ± 0.45	8.05 ± 0.15	15.50min	5.25min	—	—	—	—	—	1
<b>PQ26A/20</b>	26.50 ± 0.40	10.33 ± 0.13	19.00 ± 0.45	12.00 ± 0.20	22.30min	6.00 ± 0.15	15.50min	—	—	—	—	—	—	1
<b>PQ26B/14.38</b>	26.50 ± 0.45	7.19 ± 0.20	19.00 ± 0.35	12.00 ± 0.20	22.50 ± 0.45	2.86 ± 0.20	15.50min	6.08 ± 0.20	—	—	—	—	—	1
<b>PQ27/20</b>	27.30 ± 0.46	10.10 ± 0.12	19.00 ± 0.45	12.00 ± 0.20	22.50 ± 0.46	5.75 ± 0.15	15.50min	6.00min	—	—	—	—	—	2
<b>PQ27A/20</b>	27.30 ± 0.46	10.10 ± 0.13	19.00 ± 0.45	12.00 ± 0.20	22.50min	5.75 ± 0.15	16.80min	6.00min	—	—	—	—	—	2
<b>PQ27D/20.4</b>	27.00 ± 0.50	10.20 ± 0.15	19.00 ± 0.50	11.80 ± 0.25	22.50min	6.00 ± 0.30	16.50min	—	—	—	—	—	—	1
<b>PQ31.5/21.5</b>	31.50 ± 0.50	8.20 ± 0.20	21.50 ± 0.40	14.60 ± 0.15	22.65 ± 0.50	5.30 ± 0.20	27.70 ± 0.40	—	—	—	—	—	—	6
<b>PQ32A/25</b>	32.00 ± 0.50	12.55 ± 0.25	22.00 ± 0.50	13.30 ± 0.25	27.50 ± 0.50	8.25 ± 0.20	19.75min	—	—	—	—	—	—	3
<b>PQ32B/25</b>	32.00 ± 0.50	12.55 ± 0.20	22.00 ± 0.50	13.30 ± 0.20	27.50 ± 0.50	8.08 ± 0.20	19.50min	4.80min	—	—	—	—	—	5
<b>PQ32E/24.8</b>	32.20 ± 0.50	12.40 ± 0.20	22.10 ± 0.50	13.50 ± 0.20	27.50 ± 0.50	8.05 ± 0.15	19.50min	6.00ref	—	—	—	—	—	5
<b>PQ32H/25</b>	32.00 ± 0.50	12.50 ± 0.20	22.00 ± 0.40	13.45 ± 0.25	27.50 ± 0.50	8.10 ± 0.20	19.75min	4.60min	—	—	—	—	—	1
<b>PQ35A/12.2</b>	35.00 ± 0.65	6.10 ± 0.15	18.60 ± 0.50	13.00 ± 0.20	29.70 ± 0.60	3.40 ± 0.15	24.72ref	—	—	—	—	—	—	4
<b>PQ35B/41</b>	35.10 ± 0.60	20.15 ± 0.12	26.00 ± 0.50	14.40 ± 0.35	31.50min	15.50 ± 0.15	23.50min	5.50min	—	—	—	—	—	1
<b>PQ35D/30</b>	35.00 ± 0.50	15.00 ± 0.15	26.00 ± 0.50	14.35 ± 0.25	32.00 ± 0.50	10.70 ± 0.20	23.85 ± 0.50	—	—	—	—	—	—	8
<b>PQ35F/30</b>	35.10 ± 0.60	15.00 ± 0.30	26.00 ± 0.50	14.40 ± 0.35	31.00min	12.85 ± 0.40	23.50min	5.20min	—	—	—	—	—	9
<b>PQI35F/29</b>	35.20 ± 0.75	23.90 ± 0.15	26.00 ± 0.50	14.15 ± 0.25	31.50min	19.00 ± 0.15	23.50min	5.80ref	35.20 ± 0.75	26.00 ± 0.50	—	23.50min	5.00 ± 0.15	9
<b>PQ35.1/30</b>	35.10 ± 0.60	15.00 ± 0.15	26.00 ± 0.50	14.35 ± 0.25	32.00 ± 0.50	10.13 ± 0.15	24.00 ± 0.50	5.60min	—	—	—	—	—	1
<b>PQI35.2</b>	35.20 ± 0.50	23.88 ± 0.25	26.00 ± 0.50	14.15 ± 0.30	32.00min	19.00 ± 0.25	23.50min	5.80ref	35.20 ± 0.50	26.00 ± 0.50	—	23.50min	5.00 ± 0.15	9
<b>PQ35/35</b>	35.10 ± 0.60	17.40 ± 0.30	26.00 ± 0.50	14.35 ± 0.35	31.00min	12.50 ± 0.40	23.50min	5.20min	—	—	—	—	—	1
<b>PQ36/15.4</b>	36.00 ± 0.60	7.70 ± 0.15	29.00 ± 0.50	20.00 ± 0.30	27.40 ± 0.40	3.43 ± 0.15	21.00 ± 0.30	—	—	—	—	—	—	7
<b>PQ38/10.6</b>	38.00 ± 0.50	5.30 ± 0.15	21.32 ± 0.40	14.30 ± 0.25	32.80 ± 0.50	2.45 ± 0.15	25.84min	—	—	—	—	—	—	4
<b>PQ40/41</b>	40.30 ± 0.50	20.50 ± 0.30	28.00 ± 0.40	15.00 ± 0.30	35.70min	15.30 ± 0.30	28.10min	—	—	—	—	—	—	3
<b>PQI40B/28/14.6/5</b>	40.30 ± 0.40	14.60 ± 0.20	28.00 ± 0.40	14.80 ± 0.30	36.40min	9.50 ± 0.20	28.80 ± 0.40	6.50 ± 0.20	40.30 ± 0.40	28.00 ± 0.40	—	28.80 ± 0.40	5.00 ± 0.10	9
<b>PQ46</b>	46.00 ± 0.60	9.80 ± 0.15	30.00 ± 0.50	17.00 ± 0.30	40.50 ± 0.60	3.80 ± 0.15	—	—	—	—	—	—	—	10
<b>PQ50/50</b>	50.00 ± 0.70	25.00 ± 0.20	32.00 ± 0.60	20.00 ± 0.35	44.00 ± 0.70	18.00 ± 0.20	31.50min	—	—	—	—	—	—	1

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
PQ20/16	0.61	37.60	61.90	2330.00	12.94
PQ20/20	0.74	45.40	62.00	2790.00	15.48
PQ20A/16	0.62	37.41	60.40	2246.06	13.20
PQ26/20	0.37	45.00	121.00	5470.00	28.40
PQ26/25	0.45	54.30	120.00	6530.00	30.00
PQ26A/20	0.38	44.21	117.38	5189.37	30.60
PQ26B/14.38	0.27	32.60	119.00	3878.00	23.32
PQ27/20	0.36	43.35	119.93	5198.80	30.30
PQ27A/20	0.39	44.19	114.97	5080.52	28.40
PQ27D/20.4	1.70	44.98	111.75	5026.52	28.60
PQ31.5/21.5	0.68	41.69	60.92	2539.36	27.80
PQ32A/25	0.44	74.60	165.80	12368.68	47.00
PQ32B/25	0.39	55.41	140.52	7786.21	46.68
PQ32E/24.8	0.38	54.24	144.46	7835.90	46.80
PQ32H/25	0.38	58.50	153.10	8956.00	47.70
PQ35A/12.2	0.40	42.96	108.28	4651.80	12.00
PQ35B/41	0.53	86.48	164.69	14241.78	81.54
PQ35D/30	0.42	75.10	176.90	13285.00	64.30
PQ35F/30	0.46	69.61	150.77	10495.63	62.60
PQI35F/29	0.42	75.20	181.20	13628.50	64.00
PQ35.1/30	0.39	64.72	165.17	10689.80	64.32
PQI35.2	0.37	68.71	183.66	12619.21	62.65
PQ35/35	0.45	74.11	163.39	12108.88	73.88
PQ36/15.4	0.24	37.65	159.64	6011.52	30.44
PQ38/10.6	0.57	48.54	85.03	4127.36	26.96
PQ40/41	0.52	93.57	180.20	16860.00	95.50
PQI40B/28/14.6/5	0.30	51.29	169.59	8871.51	57.30
PQ46	0.24	51.40	210.00	10794.00	81.00
PQ50/50	0.34	113.80	333.70	37975.00	195.00

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )									
	P4	P41	P42	P45	P451	P452	P47	P48	P51	P61
PQ20/16	3880	3770		4100			4000		2200	
PQ20/20	3300	3260		3500	3900		3480	3300	1880	
PQ20A/16		3700								
PQ26/20	6170	5900		7000			6300	6170	3690	
PQ26/25	5250	5000		5700			5600			
PQ26A/20	5520	5300		6500			6300			
PQ26B/14.38				8000						
PQ27/20	5740	5560					6800			
PQ27A/20	5200	5100		6400			6300			
PQ27D/20.4	5230	5100		6200			6000			
PQ31.5/21.5							3000			
PQ32A/25							6200			
PQ32B/25	5530	5400		6600			6400			
PQ32E/24.8		5500								
PQ32H/25				6300						
PQ35A/12.2							6000			
PQ35B/41										
PQ35D/30				5100						
PQ35F/30				5840						
PQI35F/29	6700			6700						
PQ35.1/30							6650			
PQI35.2										
PQ35/35	5100			6000			5800		3200	2000
PQ36/15.4							6150			
PQ38/10.6							5500			
PQ40/41	4500									
PQI40B/28/14.6/5							7100			
PQ46				9200						
PQ50/50				7000						

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. Customized dimensions are available.


## Type : RM/LM Cores

Ordering Code:


P4	RM5	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:


Type:1

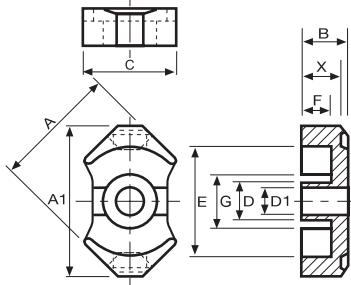


Type:2

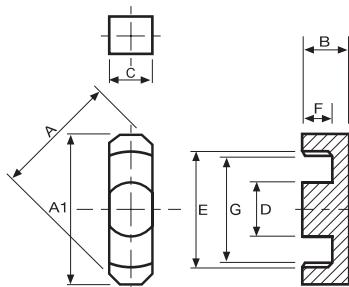


Type:3

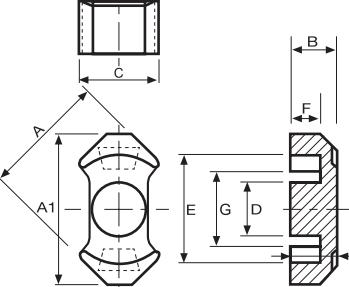


Type:4

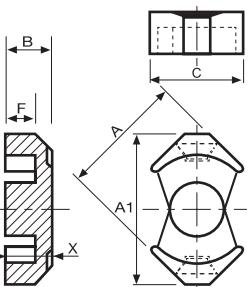


Type:5

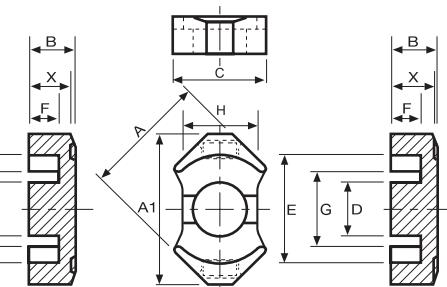


Type:6

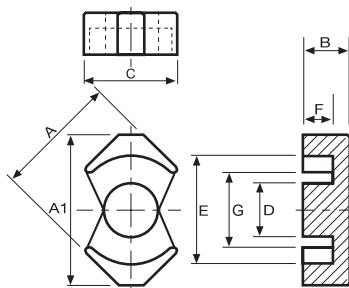


Type:7

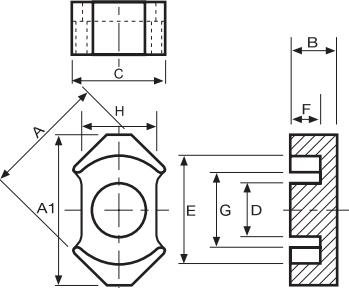

Type:8

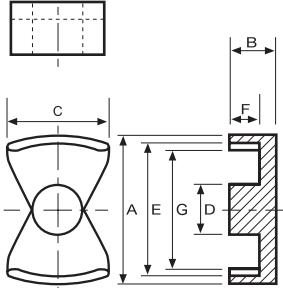

Type:9

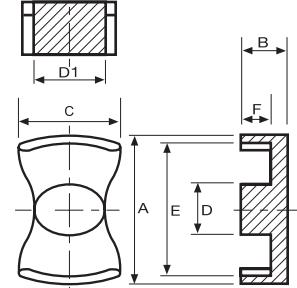

## DIMENSIONS

CORES	DIMENSIONS (mm)											Type
	A	A <sub>1</sub>	B	C	D <sup>(ø)</sup>	D <sub>1</sub> <sup>(ø)</sup>	E	F	G	H	2X	
<b>RM4</b>	9.60 ± 0.20	10.80 ± 0.20	5.20 ± 0.05	6.40 ± 0.20	3.80 ± 0.10	—	8.15 ± 0.15	3.60 ± 0.10	5.80min	—	9.00 ± 0.25	3
<b>RM5</b>	12.05 ± 0.25	14.30 ± 0.30	5.20 ± 0.10	9.55 ± 0.25	4.80 ± 0.10	—	10.40 ± 0.20	3.35 ± 0.20	6.00min	—	9.10 ± 0.25	5
<b>RM5CH</b>	12.05 ± 0.25	14.30 ± 0.30	5.20 ± 0.05	9.55 ± 0.25	4.80 ± 0.10	2.05ref	10.40 ± 0.20	3.25 ± 0.10	6.00min	—	9.40 ± 0.20	5
<b>RM6</b>	14.40 ± 0.30	17.60 ± 0.30	6.20 ± 0.10	10.47 ± 0.25	6.30 ± 0.10	—	12.64 ± 0.25	4.20 ± 0.20	8.50min	—	10.40 ± 0.25	5
<b>RM6CH</b>	14.40 ± 0.30	17.60 ± 0.30	6.20 ± 0.10	10.47 ± 0.25	6.30 ± 0.10	3.00 ± 0.10	12.64 ± 0.25	4.20 ± 0.20	8.50min	—	10.40 ± 0.25	5
<b>RM6C</b>	14.40 ± 0.30	17.60 ± 0.30	4.50 ± 0.10	5.15 ± 0.15	6.30 ± 0.10	—	12.64 ± 0.25	2.35 ± 0.10	11.50min	—	—	2
<b>RM6F</b>	14.40 ± 0.30	16.80 ± 0.30	5.50 ± 0.10	8.00 ± 0.30	6.30 ± 0.15	—	12.65 ± 0.25	3.40 ± 0.15	9.10min	—	—	6
<b>RM6H</b>	14.40 ± 0.30	17.60 ± 0.30	4.15 ± 0.10	8.00 ± 0.30	6.30 ± 0.10	—	12.65 ± 0.25	2.10 ± 0.10	9.15 ± 0.30	—	—	5
<b>RM7A</b>	16.85 ± 0.35	19.90 ± 0.40	6.70 ± 0.10	11.43 ± 0.30	7.10 ± 0.15	—	15.10 ± 0.35	4.32 ± 0.15	11.00min	—	12.50 ± 0.30	4
<b>RM7E</b>	16.85 ± 0.30	19.90 ± 0.40	6.80 ± 0.20	11.05 ± 0.20	7.10 ± 0.15	—	15.10 ± 0.35	4.42 ± 0.30	11.00min	—	—	6
<b>RM7F/13.6</b>	16.85 ± 0.30	19.90 ± 0.40	6.80 ± 0.10	11.05 ± 0.25	7.10 ± 0.15	—	15.10 ± 0.35	4.45 ± 0.20	11.80min	—	—	6
<b>RM8</b>	19.35 ± 0.35	22.76 ± 0.45	8.20 ± 0.15	15.45 ± 0.30	8.40 ± 0.15	—	17.30 ± 0.30	5.60 ± 0.20	9.80min	—	14.40 ± 0.25	5
<b>RM8CH</b>	19.35 ± 0.35	22.76 ± 0.45	8.20 ± 0.15	15.45 ± 0.30	8.40 ± 0.15	4.50 ± 0.15	17.30 ± 0.30	5.60 ± 0.20	9.80min	—	14.40 ± 0.25	1
<b>RM10</b>	24.15 ± 0.55	27.80 ± 0.65	9.30 ± 0.15	19.85 ± 0.30	10.65 ± 0.20	—	21.65 ± 0.45	6.40 ± 0.20	12.40min	—	16.30 ± 0.25	5
<b>RM10B</b>	24.20 ± 0.55	28.20 ± 0.65	9.30 ± 0.15	18.05 ± 0.30	10.65 ± 0.20	—	22.00 ± 0.45	6.50 ± 0.20	14.20min	13.25 ± 0.25	—	7
<b>RM12</b>	29.20 ± 0.60	36.85 ± 0.75	12.25 ± 0.10	—	12.60 ± 0.20	—	25.45 ± 0.55	8.55 ± 0.15	13.40min	15.85 ± 0.25	22.10 ± 0.25	5
<b>LM8A</b>	23.00 ± 0.45	—	8.00 ± 0.15	17.71ref	9.00 ± 0.20	12.80 ± 0.20	18.10 ± 0.40	5.30 ± 0.20	—	—	—	9
<b>LM8D</b>	21.00 ± 0.50	—	6.35 ± 0.15	12.50 ± 0.30	8.25 ± 0.20	—	17.20 ± 0.40	3.65 ± 0.15	13.80 ± 0.30	—	—	8
<b>LM61</b>	61.00 ± 1.20	—	23.25 ± 0.25	39.00 ± 0.80	22.60 ± 0.40	—	50.00 ± 1.00	17.25 ± 0.25	—	—	—	9

\* RM 5,6,8 CAN ALSO BE MANUFACTURED WITH CENTER HOLES. (CH)

## ■ EFFECTIVE PARAMETERS (PER SET)

CORES	EFFECTIVE PARAMETERS					
	C <sub>i</sub> (mm <sup>-1</sup> )	L <sub>e</sub> (mm)	A <sub>e</sub> (mm <sup>2</sup> )	A <sub>min</sub> (mm <sup>2</sup> )	V <sub>e</sub> (mm <sup>3</sup> )	Wt(g/set)
<b>RM4</b>	1.70	22.00	13.00	11.30	286.00	1.68
<b>RM5</b>	0.93	22.10	23.80	18.10	526.00	3.28
<b>RM5CH (With Center Hole)</b>	1.01	21.40	21.20	—	453.68	1.53
<b>RM6</b>	0.78	28.60	36.60	31.00	1050.00	5.44
<b>RM6CH (With Center Hole)</b>	0.86	26.90	31.30	—	840.00	4.96
<b>RM6C</b>	0.49	20.89	42.59	—	889.99	5.06
<b>RM6F</b>	0.85	26.66	31.20	31.17	881.36	4.72
<b>RM6H</b>	0.57	20.70	36.60	31.17	757.62	3.80
<b>RM7A</b>	0.60	30.27	50.74	—	1535.91	7.05
<b>RM7E</b>	0.90	35.60	39.60	39.59	1409.76	7.12
<b>RM7F/13.6</b>	0.90	35.60	39.60	—	1409.76	7.24
<b>RM8</b>	0.59	38.89	62.14	55.00	2416.62	12.40
<b>RM8CH (With Center Hole)</b>	0.67	35.10	52.00	—	1840.00	11.02
<b>RM10</b>	0.46	44.60	96.60	89.10	4310.00	21.88
<b>RM10B</b>	2.20	44.28	97.27	—	4307.12	20.94
<b>RM12</b>	0.42	60.60	144.00	124.70	8752.00	45.78
<b>LM8A</b>	0.45	40.50	90.77	—	3645.00	17.60
<b>LM8D</b>	0.59	29.58	50.16	—	1483.63	9.60
<b>LM61</b>	0.34	110.80	328.14	—	36357.91	253.40

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL + 30% - 20% (nH/N <sup>2</sup> )											AL + 40% - 30% (nH/N <sup>2</sup> )		
	P4	P45	P451	P452	P47	P48	P5	P51	P61	N4	A05	A05(L)	A10(L)	A121(L)
<b>RM4</b>	1100	1250 ± 25%			1230 ± 25%		1000 ± 25%			1000	1700	2870	5050	5700
<b>RM5</b>	2000	2220 ± 25%			2200 ± 25%		1860 ± 25%	1290 ± 25%		1850	3500	5700	6700	7500min
<b>RM5CH</b>							1650							
<b>RM6</b>	2400	2900 ± 25%			2850 ± 25%	2400	2300 ± 25%	1650 ± 25%		2380	4300	7300 ± 25%	8600	7490min
<b>RM6CH</b>	2170	2500			2400	2170					3900	6620 ± 25%	7800	
<b>RM6C</b>	2440 ± 25%													
<b>RM6F</b>					2400									
<b>RM6H</b>					2700 ± 25%									
<b>RM7A</b>	2600 ± 25%					2600 ± 25%								
<b>RM7E</b>	2300 ± 25%	2700 ± 25%			2600 ± 25%									
<b>RM7F/13.6</b>		3000												
<b>RM8</b>	3300	3950 ± 25%			3800 ± 25%	3300	2770	2200	1450 ± 25%	2800	5700	9700 ± 25%	12500	
<b>RM8CH</b>	2900										2900	5020	8540 ± 25%	11010
<b>RM10</b>	4200	5100 ± 25%			5040 ± 25%		3650 ± 25%	3100 ± 25%			7600	12750 ± 25%	16000	
<b>RM10B</b>	4200				4950 ± 25%	4200		3000 ± 25%					16000	
<b>RM12</b>	5500 ± 25%				6100 ± 25%		4400 ± 25%	3450 ± 25%						
<b>LM8A</b>	4500					2850								
<b>LM8D</b>														
<b>LM61</b>		9500												

Remark:


1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : EE/EEL Cores

Ordering Code:

P4	EE4.2	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:

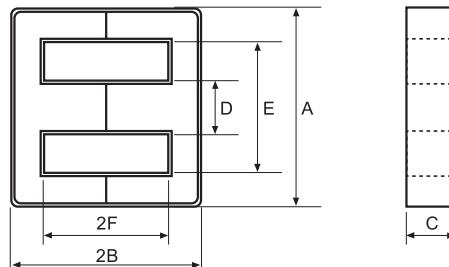

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)						EFFECTIVE PARAMETERS				
	A	B	C	D	E	F	C1(mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>EE4.2</b>	4.35 ± 0.10	1.35 ± 0.05	1.35 ± 0.10	1.20 ± 0.10	3.15 ± 0.10	0.85 ± 0.05	4.71	7.04	1.49	10.49	0.11
<b>EE5.0C</b>	5.25 ± 0.10	3.00 ± 0.15	1.40 ± 0.10	1.35 ± 0.10	3.90 ± 0.20	2.35 ± 0.15	7.50	14.03	1.87	26.25	0.13
<b>EE5.0D</b>	5.25 ± 0.10	2.66 ± 0.07	1.95 ± 0.05	1.35 ± 0.05	3.80min	1.98 ± 0.07	4.64	12.53	2.70	33.83	0.16
<b>EE5.0F</b>	5.25 ± 0.10	2.65 ± 0.10	1.90 ± 0.10	1.35 ± 0.10	3.80 ± 0.13	2.00 ± 0.10	4.83	12.55	2.60	32.63	0.08
<b>EE6.17</b>	6.17 ± 0.13	2.85 ± 0.05	1.96 ± 0.05	1.35 ± 0.05	3.70 ± 0.10	1.93 ± 0.08	3.71	12.29	3.31	40.70	0.24
<b>EE6.2</b>	6.18 ± 0.20	2.85 ± 0.08	1.95 ± 0.10	1.35 ± 0.10	3.70 ± 0.10	1.90 ± 0.10	3.67	12.20	3.33	40.57	0.26
<b>EE6.3</b>	6.30 ± 0.25	2.82 ± 0.08	2.00 ± 0.15	1.32 ± 0.08	3.60 ± 0.20	1.92 ± 0.08	3.64	12.13	3.33	40.39	0.28
<b>EE6.3/1.2</b>	6.30 ± 0.20	3.25 ± 0.15	1.20 ± 0.15	1.65 ± 0.15	4.30 ± 0.15	2.10 ± 0.10	6.14	14.08	2.29	32.28	0.16
<b>EE6.6</b>	6.60 ± 0.15	3.25 ± 0.10	1.15 ± 0.10	1.65 ± 0.05	4.30min	2.30 ± 0.05	6.74	14.63	2.17	31.75	0.07
<b>EE6.75</b>	6.75 ± 0.15	3.25 ± 0.10	3.00 ± 0.10	1.30 ± 0.10	5.20min	2.55 ± 0.10	3.86	16.24	4.21	68.36	0.34
<b>EE7.35</b>	7.35 ± 0.20	4.40 ± 0.15	1.80 ± 0.15	2.45 ± 0.15	5.10min	3.10 ± 0.15	4.52	18.90	4.18	79.00	0.38
<b>EE8.0/5.0</b>	8.00 ± 0.15	5.00 ± 0.08	5.00 ± 0.15	2.90 ± 0.10	5.31 ± 0.15	3.50 ± 0.08	1.48	20.93	14.16	296.37	1.50
<b>EE8.3A</b>	8.30 ± 0.20	4.00 ± 0.10	3.90 ± 0.10	2.15 ± 0.15	6.30 ± 0.20	3.00 ± 0.10	2.41	19.33	7.98	154.42	0.76
<b>EE8.3A-1</b>	8.30 ± 0.20	4.00 ± 0.10	3.90 ± 0.10	2.15 ± 0.15	6.30 ± 0.20	3.00 ± 0.10	2.41	19.33	7.98	154.42	0.76
<b>EE8.3B</b>	8.30 ± 0.30	4.15 ± 0.10	1.85 ± 0.15	1.85 ± 0.15	6.00min	3.13 ± 0.10	4.53	19.95	3.67	73.22	0.36
<b>EE8.3B-1</b>	8.30 ± 0.30	4.00 ± 0.10	1.85 ± 0.15	1.85 ± 0.15	6.00min	3.00 ± 0.10	5.32	19.42	3.65	70.89	0.35
<b>EE8.3D</b>	8.30 ± 0.20	4.00 ± 0.10	3.90 ± 0.10	1.85 ± 0.15	6.15 ± 0.20	3.00 ± 0.10	2.50	19.37	7.74	149.92	0.76
<b>EE8.3F</b>	8.30 ± 0.20	4.00 ± 0.20	3.90 ± 0.15	2.10 ± 0.10	6.35min	3.00 ± 0.15	2.47	19.39	7.85	152.21	0.37
<b>EEL8.3</b>	8.30 ± 0.20	5.65 ± 0.15	3.50 ± 0.15	2.15 ± 0.15	6.30 ± 0.20	4.65 ± 0.10	3.61	25.92	7.19	186.30	0.93
<b>EE8.6</b>	8.60 ± 0.30	4.65 ± 0.10	3.65 ± 0.15	1.85 ± 0.20	6.30min	3.55min	2.99	22.02	7.37	162.29	0.87
<b>EE8.7</b>	8.70 ± 0.30	4.05 ± 0.10	3.90 ± 0.10	2.15 ± 0.10	6.80min	3.05 ± 0.10	2.55	19.96	7.83	156.29	0.92
<b>EE8.8</b>	8.80 ± 0.20	6.00 ± 0.20	2.80 ± 0.10	2.80 ± 0.10	6.00 ± 0.15	4.50 ± 0.10	3.23	25.74	7.95	204.60	1.32
<b>EE8.8A</b>	9.00 ± 0.40	4.00 ± 0.10	1.90 ± 0.10	1.90 ± 0.10	5.20 ± 0.15	2.19 ± 0.16	3.13	15.58	4.98	77.65	0.52
<b>EE8.8B</b>	9.00 ± 0.40	4.00 ± 0.10	1.90 ± 0.10	1.90 ± 0.10	5.20min	2.29 ± 0.16	3.34	16.42	4.91	80.70	0.54
<b>EE8.8D</b>	8.80 ± 0.30	4.20 ± 0.10	1.50 ± 0.20	2.30 ± 0.10	6.40 ± 0.15	3.15 ± 0.15	5.92	20.15	3.40	68.51	0.36
<b>EEL8.8</b>	8.80 ± 0.20	8.50 ± 0.10	2.80 ± 0.10	2.80 ± 0.10	6.00 ± 0.15	7.20 ± 0.10	4.67	36.22	7.75	280.70	1.41
<b>EE9.0</b>	9.00 ± 0.20	6.15 ± 0.20	2.80 ± 0.10	2.80 ± 0.10	6.30 ± 0.15	4.65 ± 0.10	3.39	26.58	7.83	208.23	1.06
<b>EE9.0A</b>	9.00 ± 0.40	5.50 ± 0.10	2.35 ± 0.15	2.35 ± 0.10	5.75min	3.75 ± 0.15	3.42	22.71	6.64	150.77	0.82
<b>EE9.3</b>	9.30 ± 0.20	6.20 ± 0.15	2.80 ± 0.10	2.80 ± 0.10	6.60 ± 0.10	4.70 ± 0.15	3.47	27.16	7.84	212.87	1.04
<b>EE9.45</b>	9.45 ± 0.20	5.35 ± 0.15	2.25 ± 0.15	3.30 ± 0.15	6.60min	3.75 ± 0.15	3.48	23.11	6.64	153.40	0.38
<b>EE10</b>	10.20 ± 0.20	5.70 ± 0.10	4.75 ± 0.15	2.45 ± 0.15	7.70min	4.20 ± 0.15	2.13	26.00	12.00	323.00	1.60
<b>EE10/10</b>	10.20 ± 0.20	5.50 ± 0.10	9.85 ± 0.15	2.40 ± 0.15	7.80 ± 0.20	4.30 ± 0.10	1.11	26.36	23.64	623.10	3.32
<b>EE10A</b>	10.00 ± 0.20	6.60 ± 0.20	2.70 ± 0.10	2.80 ± 0.10	7.30 ± 0.15	5.00 ± 0.15	3.80	29.08	7.66	222.75	1.12
<b>EE10.2</b>	10.20 ± 0.20	4.50 ± 0.10	4.75 ± 0.15	2.45 ± 0.15	8.75 ± 0.20	3.25 ± 0.10	2.18	20.39	9.34	190.44	1.24
<b>EE10.6</b>	10.60 ± 0.20	4.75 ± 0.15	4.75 ± 0.15	2.40 ± 0.15	8.20min	3.25 ± 0.15	1.94	22.85	11.76	268.60	1.42
<b>EE10.7</b>	10.70 ± 0.20	4.15 ± 0.15	6.15 ± 0.15	2.40 ± 0.20	8.30 ± 0.20	2.90 ± 0.15	1.43	21.34	14.97	319.46	0.78



## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										AL ± 30% (nH/N <sup>2</sup> )			
	P4	P41	P45	P451	P452	P47	P48	P5	P61	A05	A07	A10(L)	A121(L)	A151(L)
EE4.2	160					190		130		290				
EE5.0C	220	215												
EE5.0D	280	260				330		250		400	440	980min	1080min	1350min
EE5.0F	280											750min		
EE6.17		405												
EE6.2	360					400							1600min	
EE6.3	370	360	410			400		340		560	620	1800	2100	
EE6.3/1.2	270													
EE6.6	100													
EE6.75													1250min	
EE7.35														
EE8.0/5.0	1220													
EE8.3A	750	700				785		600		1100	1290	3000	3300	3800
EE8.3A-1												2000+40%-30%		
EE8.3B	350	330				370				510	580	1800		1980
EE8.3B-1	360	350				400					600	1800		
EE8.3D	750									1090	1200	3000	3700	2970min
EE8.3F														3125min
EEL8.3												2140		
EE8.6	680										1140		2400min	
EE8.7													3300	
EE8.8	680										1200	2740	3180	3680
EE8.8A	470	460				500					870	1700min	2720	
EE8.8B	450	440	510			470								
EE8.8D												1050min		
EEL8.8											950			
EE9.0	620											2420		
EE9.0A													3300	
EE9.3	540													
EE9.45														
EE10	940	900	1120			1100		750		1500	1750	4190	3332min	3860min
EE10/10	1850		2100			2050						5720min	6500min	7500min
EE10A	530										1050	2200		
EE10.2						870				1200	1300	2500min	2850min	3250min
EE10.6												4600		
EE10.7		1300												

Remark:


1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : EE/EEL Cores

Ordering Code:

P4	EE16	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:

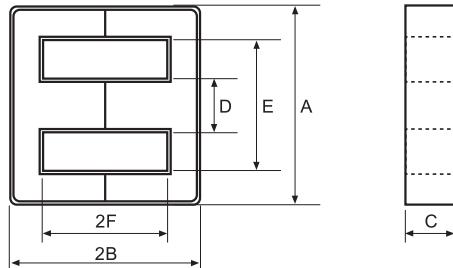

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)						EFFECTIVE PARAMETERS				
	A	B	C	D	E	F	C1(mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>EE11</b>	11.00 ± 0.20	2.60 ± 0.10	4.50 ± 0.20	2.00 ± 0.20	9.00 ± 0.20	1.45 ± 0.10	1.67	16.11	9.65	155.46	0.96
<b>EEL11.1</b>	11.10 ± 0.20	7.80 ± 0.20	2.90 ± 0.10	3.40 ± 0.10	7.70 ± 0.20	6.00 ± 0.15	3.39	33.78	9.97	336.93	1.70
<b>EE12</b>	12.00 ± 0.15	3.20 ± 0.10	6.50 ± 0.10	3.10 ± 0.10	8.90 ± 0.15	1.80 ± 0.10	0.92	17.60	19.18	337.57	1.70
<b>EEL12.8-1</b>	12.80 ± 0.25	12.00 ± 0.15	3.50 ± 0.13	3.65 ± 0.10	8.80 ± 0.25	10.00 ± 0.15	3.81	51.20	13.43	687.80	3.38
<b>EE12.9/10</b>	12.95 ± 0.30	6.50 <sup>+0.00</sup> <sub>-0.15</sub>	9.80 ± 0.20	3.55 ± 0.15	9.15 ± 0.25	4.50 <sup>+0.30</sup> <sub>-0.00</sub>	0.80	29.57	36.80	1088.00	5.34
<b>EE12.9A</b>	12.90 ± 0.30	6.85 ± 0.15	1.80 ± 0.20	6.00 ± 0.10	9.40 ± 0.25	4.50 ± 0.30	3.54	27.43	7.75	212.58	1.28
<b>EE13</b>	13.00 ± 0.30	6.00 ± 0.20	6.15 ± 0.15	2.95 <sup>+0.00</sup> <sub>-0.35</sub>	10.50 ± 0.30	4.65 ± 0.15	1.64	28.00	17.00	480.00	2.38
<b>EE13/3.55</b>	13.13 ± 0.20	7.13 ± 0.20	3.55 ± 0.10	3.53 ± 0.15	9.00min	5.11 ± 0.15	2.34	31.93	13.66	436.16	2.18
<b>EE13B</b>	13.00 ± 0.30	4.60 ± 0.20	6.15 ± 0.15	2.80 ± 0.15	10.00min	3.10 ± 0.15	1.37	24.33	17.68	430.12	2.18
<b>EE13D</b>	13.00 ± 0.40	6.60 ± 0.15	5.90 ± 0.20	2.60 ± 0.20	10.10min	5.20 ± 0.20	2.01	32.59	16.25	529.60	2.30
<b>EEL13</b>	13.00 ± 0.20	8.10 ± 0.15	3.00 ± 0.15	3.40 ± 0.15	9.40 ± 0.20	6.30 ± 0.15	3.48	36.75	10.56	387.97	1.86
<b>EE13.5</b>	13.50 ± 0.30	5.25 ± 0.20	9.80 ± 0.20	3.60 ± 0.15	9.50min	3.55 ± 0.20	7.44	25.90	3.48	903.10	4.60
<b>EE13.7</b>	13.70 ± 0.30	6.05 ± 0.10	7.15 ± 0.20	3.40 ± 0.20	10.30 ± 0.30	4.75 ± 0.15	1.37	30.20	22.00	664.40	1.68
<b>EEL14</b>	14.05 ± 0.25	15.75 ± 0.15	3.50 ± 0.15	4.55 ± 0.15	9.25 ± 0.20	12.25 ± 0.15	3.64	62.06	17.06	1058.68	5.42
<b>EEL14A</b>	14.00 ± 0.25	13.15 <sup>+0.15</sup> <sub>-0.10</sub>	2.70 ± 0.15	4.00 ± 0.10	10.00 ± 0.25	10.95 ± 0.15	5.14	56.34	10.96	617.49	3.00
<b>EEL14.15</b>	14.15 ± 0.25	7.70 ± 0.15	4.20 ± 0.20	4.28 ± 0.15	10.55 ± 0.25	5.30 ± 0.15	1.99	33.93	17.03	577.83	3.12
<b>EEL14.6A</b>	14.60 ± 0.30	10.95 ± 0.10	3.60 <sup>+0.10</sup> <sub>-0.20</sub>	4.00 ± 0.15	10.60 ± 0.30	8.95 ± 0.15	3.30	48.02	14.54	698.21	3.30
<b>EE15</b>	15.00 ± 0.30	7.40 ± 0.20	2.30 <sup>+0.10</sup> <sub>-0.12</sub>	3.70 ± 0.20	9.20 ± 0.30	5.40 ± 0.20	3.36	32.84	9.77	321.03	1.77
<b>EEL15.4A</b>	15.40 ± 0.30	9.10 ± 0.15	3.30 <sup>+0.10</sup> <sub>-0.15</sub>	3.40 ± 0.20	11.80 ± 0.30	7.35 <sup>+0.15</sup> <sub>-0.10</sub>	3.75	43.27	11.54	499.23	2.48
<b>EE16</b>	16.00 ± 0.30	7.30 ± 0.20	4.80 ± 0.20	4.00 ± 0.20	11.70min	5.20 ± 0.20	1.81	35.23	19.49	686.55	3.20
<b>EE16A</b>	16.00 ± 0.30	7.15 ± 0.15	6.80 ± 0.20	3.17 <sup>+0.18</sup> <sub>-0.17</sub>	12.50min	5.50 ± 0.10	1.48	35.50	24.00	852.00	3.96
<b>EE16D</b>	16.00 ± 0.30	7.90 ± 0.15	4.80 ± 0.15	4.00 ± 0.15	12.10 ± 0.30	5.70 ± 0.15	1.91	35.10	19.20	675.00	3.70
<b>EE16F</b>	16.00 ± 0.30	3.60 ± 0.15	3.80 ± 0.15	3.85 ± 0.15	12.00 ± 0.20	1.60 ± 0.15	1.38	20.77	15.06	312.80	1.62
<b>EEL16</b>	16.00 ± 0.30	12.40 ± 0.20	4.80 ± 0.20	4.00 ± 0.20	11.60min	10.20 ± 0.20	2.72	55.00	20.00	1116.00	5.28
<b>EE16.4</b>	16.40 ± 0.30	4.90 ± 0.20	8.00 ± 0.20	4.50 ± 0.15	12.20 ± 0.30	3.05 ± 0.15	0.81	26.08	32.30	842.50	4.36
<b>EE16.4A</b>	16.40 ± 0.30	6.70 ± 0.15	8.00 ± 0.20	4.50 ± 0.15	12.20 ± 0.30	4.50 ± 0.15	0.93	32.55	34.89	1135.48	5.34
<b>EE16.5</b>	16.50 ± 0.30	6.00 ± 0.10	7.10 ± 0.15	4.60 ± 0.10	11.50 ± 0.20	3.65 ± 0.10	0.86	28.93	33.75	976.39	5.08
<b>EE16.5-1</b>	16.48 ± 0.30	6.50 <sup>+0.25</sup> <sub>-0.30</sub>	9.00 ± 0.20	3.03 ± 0.15	9.78min	4.20 ± 0.20	0.79	28.55	35.94	1026.09	6.86
<b>EE16.5A</b>	16.50 ± 0.25	10.90 ± 0.20	3.40 ± 0.20	4.25 ± 0.15	12.00min	8.40 ± 0.20	3.18	48.56	15.27	741.51	3.56
<b>EE16.7</b>	16.70 <sup>+0.40</sup> <sub>-0.20</sub>	7.30 ± 0.15	4.70 ± 0.20	4.00 ± 0.20	12.50min	5.35 ± 0.15	2.22	36.78	16.58	610.22	3.40
<b>EEL16.8</b>	16.80 ± 0.30	12.50 ± 0.30	4.85 ± 0.20	4.00 ± 0.15	12.50min	10.30 ± 0.30	2.84	55.00	19.40	1067.00	5.72
<b>EE17</b>	16.90 ± 0.30	8.60 ± 0.20	7.35 ± 0.15	4.75 ± 0.12	11.55 ± 0.25	5.85 ± 0.15	1.01	38.35	37.80	1449.40	7.36
<b>EEL17</b>	17.00 ± 0.30	10.95 <sup>+0.20</sup> <sub>-0.10</sub>	3.60 <sup>+0.10</sup> <sub>-0.20</sub>	5.10 <sup>+0.10</sup> <sub>-0.20</sub>	12.20 <sup>+0.25</sup> <sub>-0.15</sub>	8.95 <sup>+0.15</sup> <sub>-0.10</sub>	3.00	49.82	16.63	828.51	4.40
<b>EEL17A</b>	17.00 <sup>+0.30</sup> <sub>-0.20</sub>	12.85 ± 0.15	3.55 <sup>+0.10</sup> <sub>-0.20</sub>	4.80 ± 0.15	12.20 <sup>+0.30</sup> <sub>-0.10</sub>	10.45 <sup>+0.20</sup> <sub>-0.10</sub>	3.33	56.74	17.04	966.85	4.78
<b>EEL17B</b>	17.20 ± 0.25	12.40 ± 0.20	4.80 ± 0.20	4.00 ± 0.20	12.60min	10.20 ± 0.20	2.77	56.24	20.28	1140.82	5.64

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										AL ± 30% (nH/N <sup>2</sup> )			
	P4	P41	P45	P451	P452	P47	P48	P5	P61	A05	A07	A10(L)	A121(L)	A151(L)
<b>EE11</b>	1060(ref)													
<b>EEL11.1</b>												1800min		
<b>EE12</b>	2100									2700				
<b>EEL12.8-1</b>	600					700								
<b>EE12.9/10</b>	2600													
<b>EE12.9A</b>	610													
<b>EE13</b>	1250	1170	1370			1330	1250	1070		1650	1950	3300min		
<b>EE13/3.55</b>	1050													
<b>EE13B</b>							1500							
<b>EE13D</b>														
<b>EEL13</b>											1300			
<b>EE13.5</b>							2800							
<b>EE13.7</b>	1800													
<b>EEL14</b>	700													
<b>EEL14A</b>	500													
<b>EEL14.15</b>														
<b>EEL14.6A</b>	650					740								
<b>EE15</b>												2000min		
<b>EEL15.4A</b>											1200			
<b>EE16</b>	1240	1200	1350	1500		1320		1050		2090	2700	4500	5170	
<b>EE16A</b>	1550		1850			1750	1550			2490	2950	6600		
<b>EE16D</b>	1100	1050	1260			1230		910						
<b>EE16F</b>	1200													
<b>EEL16</b>	800	770				900		700		1590	1980	3300	3850	
<b>EE16.4</b>	2500													
<b>EE16.4A</b>	2200	2100	2600			2500								
<b>EE16.5</b>	2560		2780			2720								
<b>EE16.5-1</b>	2400									3600	4300	8200min		
<b>EE16.5A</b>	660													
<b>EE16.7</b>	1050													
<b>EEL16.8</b>	800					950				1400	1800			
<b>EE17</b>						2400								
<b>EEL17</b>	840													
<b>EEL17A</b>	770													
<b>EEL17B</b>									1700					

Remark:


1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : EE/EEL Cores

Ordering Code:

P4	EEL19	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:

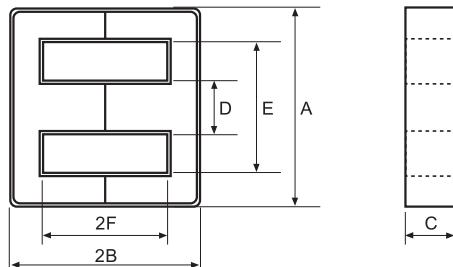

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)						EFFECTIVE PARAMETERS				
	A	B	C	D	E	F	C1(mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>EE19</b>	19.10 ± 0.30	8.15 ± 0.30	5.00 ± 0.20	4.55 ± 0.15	14.20min	5.70 ± 0.20	1.67	40.00	23.00	954.00	4.52
<b>EE19A</b>	19.00 ± 0.25	8.75 ± 0.20	4.15 ± 0.15	3.20 ± 0.15	14.60 ± 0.25	6.55 ± 0.20	2.70	43.06	15.91	685.13	3.64
<b>EE19B</b>	19.00 ± 0.40	8.30 ± 0.20	4.80 ± 0.20	4.60 ± 0.20	14.30min	5.80 ± 0.20	1.84	40.60	22.10	897.26	4.52
<b>EE19C</b>	19.00 ± 0.40	8.00 ± 0.15	4.80 ± 0.20	4.80 ± 0.20	14.30 ± 0.30	5.70 ± 0.15	1.76	39.63	22.55	893.73	4.86
<b>EE19D</b>	19.55 ± 0.55	8.05 ± 0.35	4.85 ± 0.25	4.85 ± 0.25	14.80min	5.75 ± 0.25	1.76	40.31	22.93	924.63	4.46
<b>EE19.15</b>	19.15 ± 0.40	7.90 ± 0.15	4.80 ± 0.20	4.65 ± 0.15	14.75 ± 0.30	5.60 ± 0.15	1.82	39.65	21.79	863.97	4.36
<b>EE19/16</b>	19.10 ± 0.30	8.10 ± 0.20	7.90 ± 0.20	4.55 ± 0.15	14.20min	5.70 ± 0.10	1.11	40.00	36.00	1507.00	7.10
<b>EEL19</b>	20.00 ± 0.30	13.70 ± 0.25	5.00 ± 0.05	4.55 ± 0.20	14.30min	11.15 ± 0.15	2.46	61.00	25.00	1553.00	7.40
<b>EEL19.4</b>	19.40 ± 0.20	14.25 ± 0.15	3.55 ± 0.15	6.00 ± 0.15	13.40 ± 0.10	11.25 ± 0.20	2.90	61.82	21.30	1316.87	6.30
<b>EEL19A</b>	20.00 ± 0.25	13.95 ± 0.25	5.00 ± 0.05	4.55 ± 0.10	14.70 ± 0.20	11.40 ± 0.15	2.57	63.33	24.59	1557.28	7.50
<b>EEL19D</b>	20.00 ± 0.25	16.00 ± 0.25	4.90 ± 0.15	4.55 ± 0.10	14.70 ± 0.20	13.40 ± 0.15	2.95	71.34	24.16	1723.57	8.82
<b>EE19.8/10.6/5.8</b>	19.80 ± 0.40	5.80 ± 0.20	10.60 ± 0.20	5.70 ± 0.20	14.40 ± 0.30	3.00 ± 0.20	0.50	29.45	59.02	1738.07	9.02
<b>EE20A</b>	20.00 ± 0.25	4.00 ± 0.10	9.95 ± 0.20	4.55 ± 0.15	14.70 ± 0.25	1.90 ± 0.10	0.56	24.77	44.48	1101.67	7.26
<b>EEL20H</b>	20.00 ± 0.40	11.40 ± 0.20	5.65 ± 0.25	5.70 ± 0.20	14.10min	8.70 ± 0.20	1.64	52.09	31.76	1654.36	8.40
<b>EEL20J</b>	20.00 ± 0.40	13.20 ± 0.20	5.65 ± 0.25	5.70 ± 0.20	14.10min	10.50 ± 0.20	1.88	59.36	31.60	1875.21	6.20
<b>EEL20K</b>	20.00 ± 0.40	9.95 ± 0.15	5.70 ± 0.20	5.75 ± 0.15	14.40 ± 0.30	7.15 ± 0.15	1.44	46.30	32.10	1490.00	7.50
<b>EE20.5B</b>	20.50 ± 0.30	10.70 ± 0.15	7.00 ± 0.30	6.00 ± 0.20	14.50 ± 0.30	7.00 ± 0.15	1.06	46.73	44.29	2069.50	12.30
<b>EE22</b>	22.00 ± 0.40	9.20 ± 0.20	5.70 ± 0.30	5.75 ± 0.25	16.00 ± 0.40	5.40 ± 0.20	0.97	41.96	36.26	1610.00	7.80
<b>EEL22</b>	22.25 ± 0.30	15.26 ± 0.30	5.70 ± 0.30	5.70 ± 0.30	15.50min	11.20 ± 0.30	1.77	65.00	37.00	2405.00	11.74
<b>EEL22A</b>	22.40 ± 0.30	22.20 ± 0.30	4.70 ± 0.20	5.80 ± 0.20	16.00 ± 0.20	18.20 ± 0.20	3.15	93.21	29.58	2757.10	13.66
<b>EEL22B</b>	22.00 ± 0.30	30.00 ± 0.25	4.70 ± 0.20	5.80 ± 0.20	15.90 ± 0.25	26.50 ± 0.25	4.43	125.94	28.40	3576.94	17.36
<b>EE25/19</b>	25.40 ± 0.50	9.70 ± 0.30	6.30 ± 0.20	6.35 ± 0.25	18.55min	6.65 ± 0.35	1.21	48.00	40.00	1962.00	9.36
<b>EEL25</b>	25.40 ± 0.40	15.90 ± 0.25	6.35 ± 0.25	6.35 ± 0.30	18.80min	12.70 ± 0.30	1.79	73.00	40.00	3005.00	14.50
<b>EEL25C</b>	25.20 ± 0.25	16.50 ± 0.20	4.00 ± 0.20	8.40 ± 0.20	17.20 ± 0.20	12.55 ± 0.20	2.20	71.60	32.51	2327.60	11.48
<b>EEL25E</b>	25.20 ± 0.30	19.00 ± 0.20	4.00 ± 0.20	8.40 ± 0.20	17.00min	15.00 ± 0.25	2.50	81.48	32.62	2657.72	13.32
<b>EEL25F</b>	25.05 ± 0.75	12.55 ± 0.25	7.20 ± 0.30	7.25 ± 0.25	17.90 ± 0.40	8.95 ± 0.25	1.10	57.50	52.50	3020.00	15.11
<b>EE26.7</b>	26.70 ± 0.50	10.80 ± 0.20	8.00 ± 0.20	7.00 ± 0.20	19.00min	6.80 ± 0.20	0.87	51.37	59.34	3048.50	12.00
<b>EEL26.7</b>	26.70 ± 0.50	17.50 ± 0.20	8.00 ± 0.20	7.00 ± 0.20	19.00min	13.60 ± 0.20	1.34	78.40	58.50	4590.00	15.59
<b>EEL28.4</b>	28.40 ± 0.40	20.40 ± 0.20	11.50 ± 0.20	8.00 ± 0.20	20.00min	16.40 ± 0.20	0.96	90.30	93.70	8462.00	40.80
<b>EEL30</b>	30.20 ± 0.25	18.85 ± 0.20	4.00 ± 0.20	11.25 ± 0.20	19.20 ± 0.20	13.35 ± 0.15	1.77	78.72	44.39	3494.40	17.70
<b>EE30A</b>	30.00 ± 0.80	16.80 ± 0.20	7.05 ± 0.20	6.95 ± 0.20	19.90 ± 0.40	11.30 ± 0.20	1.17	70.80	60.59	4290.00	24.20
<b>EE30.1</b>	30.10 ± 0.70	15.00 ± 0.20	7.05 ± 0.25	6.95 ± 0.25	19.90 ± 0.40	10.00 ± 0.30	1.07	64.86	60.46	3921.66	21.16
<b>EE30.25</b>	30.25 ± 0.70	13.45 ± 0.20	10.70 ± 0.25	10.70 ± 0.25	19.90min	8.00min	0.51	58.00	113.76	6598.02	34.10
<b>EE35A</b>	34.32 ± 0.61	14.12 ± 0.15	9.27 ± 0.25	9.32 ± 0.20	25.53min	9.78 ± 0.13	0.84	69.20	82.64	5719.22	28.78
<b>EE36</b>	36.15 ± 0.85	17.80 ± 0.20	11.25 ± 0.25	9.95 ± 0.25	24.50min	12.00min	0.71	81.72	115.51	9441.04	48.40
<b>EE39.5</b>	39.50 ± 0.80	6.85 ± 0.10	13.50 ± 0.30	4.70 ± 0.30	34.40min	4.15 ± 0.10	0.78	54.24	69.98	3795.72	16.40
<b>EEL40.4</b>	40.40 ± 0.60	30.95 ± 0.25	8.00 ± 0.20	11.20 ± 0.25	29.20 ± 0.50	22.95 ± 0.25	1.36	129.29	94.96	12277.38	64.30
<b>EE42</b>	42.00 ± 0.50	6.48 ± 0.15	13.50 ± 0.30	4.80 ± 0.20	37.00min	4.10 ± 0.15	0.87	56.17	64.90	3645.43	17.26
<b>EE42A</b>	42.15 ± 0.85	21.20 ± 0.40	14.85 ± 0.30	11.85 ± 0.35	29.50mm	15.10 ± 0.30	0.54	97.60	178.00	17400.00	89.40
<b>EE65</b>	65.00 ± 1.20	32.50 ± 0.30	26.90 ± 0.50	19.65 ± 0.35	45.10 ± 0.90	22.60 ± 0.40	0.28	146.93	532.11	78182.92	374.00
<b>EE70</b>	70.50 ± 1.00	33.20 ± 0.20	31.60 ± 0.60	21.65 ± 0.50	48.00 ± 1.50	22.40 ± 0.40	0.22	149.90	674.60	101106.00	517.00
<b>EE80</b>	80.00 ± 1.80	38.10 ± 0.40	19.80 ± 0.40	19.80 ± 0.40	60.20 ± 1.30	28.30 ± 0.40	0.47	184.00	390.00	71800.00	360.00

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )										AL ± 30% (nH/N <sup>2</sup> )			
	P4	P41	P45	P451	P452	P47	P48	P5	P61	A05	A07	A10(L)	A121(L)	A151(L)
<b>EE19</b>	1300	1250	1370			1420	1300	1040		2240	3000	5100	4000min	4690min
<b>EE19A</b>	900													
<b>EE19B</b>	1200	1150								2120				
<b>EE19C</b>	1300													
<b>EE19D</b>	1360											4000min		
<b>EE19.15</b>										2000				
<b>EE19/16</b>	2100									3500	4700	9000		
<b>EEL19</b>	800	770				1050	800			1820	2280	3800		
<b>EEL19.4</b>	900													
<b>EEL19A</b>	800	750	900			880					1900			
<b>EEL19D</b>	900													
<b>EE19.8/10.6/5.8</b>						4400								
<b>EE20A</b>	3536													
<b>EEL20H</b>												4460min		
<b>EEL20J</b>												3380		
<b>EEL20K</b>		1470 <sup>+30%</sup> <sub>-20%</sub>												
<b>EE20.5B</b>		3400 (P42)												
<b>EE22</b>	1900	1820	2230			2200				2900	3750			
<b>EEL22</b>	1400										3090			
<b>EEL22A</b>	860													
<b>EEL22B</b>	650													
<b>EE25/19</b>	1800	1730	2200			2100		1500		3410	4400	8000	8500min	9500min
<b>EEL25</b>	1330					1450		1030		2580	3200	5600	5320min	
<b>EEL25C</b>	1200		1300											
<b>EEL25E</b>	1600													
<b>EEL25F</b>		1850 <sup>+30%</sup> <sub>-20%</sub>												
<b>EE26.7</b>		2600												
<b>EEL26.7</b>		1600												
<b>EEL28.4</b>	2400													
<b>EEL30</b>	1530													
<b>EE30A</b>	1900													
<b>EE30.1</b>	2300									3600	4500			
<b>EE30.25</b>		4100												
<b>EE35A</b>	3150					3300				5000	6300			
<b>EE36</b>	3500	3200	3950			3850								
<b>EE39.5</b>							2800							
<b>EEL40.4</b>	1940							2600						
<b>EE42</b>														
<b>EE42A</b>										7500				
<b>EE65</b>	9500													
<b>EE70</b>	10000													
<b>EE80</b>		4500 <sup>+30%</sup> <sub>-20%</sub>												

Remark:


1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : EF Cores

Ordering Code:

P4	EF16	G□
Material 材質	Core Size 品名	Gapped AL Value

Shape:

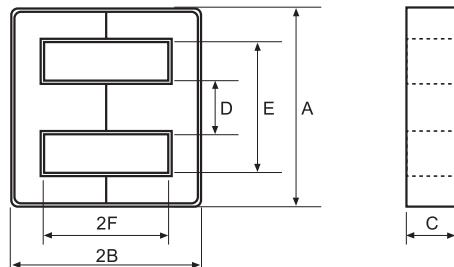

### DIMENSIONS

CORES	DIMENSIONS (mm)					
	A	B	C	D	E	F
<b>EF10</b>	10.00 ± 0.30	5.00 ± 0.10	2.75 ± 0.15	2.88 ± 0.15	7.25 ± 0.25	3.63 ± 0.15
<b>EF12</b>	12.00 <sup>+0.20</sup> <sub>-0.30</sub>	7.40 ± 0.10	3.60 ± 0.20	3.60 ± 0.15	8.80min	5.35 ± 0.15
<b>EF12.6</b>	12.60 <sup>+0.50</sup> <sub>-0.40</sub>	6.40 ± 0.10	3.60 ± 0.20	3.65 ± 0.15	8.80min	4.65 ± 0.15
<b>EF12.6A</b>	12.60 ± 0.40	6.90 ± 0.20	3.55 ± 0.15	3.50 ± 0.30	9.20 ± 0.30	4.90 ± 0.20
<b>EF12.6D</b>	12.65 ± 0.45	6.40 ± 0.10	3.55 ± 0.15	3.55 ± 0.15	8.90min	4.65 ± 0.15
<b>EF12.6F</b>	12.60 <sup>+0.50</sup> <sub>-0.40</sub>	7.40 ± 0.10	3.55 ± 0.15	3.65 ± 0.15	8.90min	5.65 ± 0.15
<b>EF12.6K/3.7</b>	12.60 ± 0.40	6.40 ± 0.10	3.55 ± 0.15	3.55 ± 0.15	9.20 ± 0.30	4.65 ± 0.15
<b>EF12.8</b>	12.80 ± 0.30	10.00 ± 0.20	4.90 ± 0.20	3.70 ± 0.20	8.90min	8.30 ± 0.20
<b>EF12.9</b>	12.90 ± 0.25	6.50 ± 0.15	3.60 ± 0.15	3.60 ± 0.15	9.60 ± 0.20	4.65 ± 0.15
<b>EF13/14</b>	13.40 ± 0.35	7.45 ± 0.20	3.60 ± 0.15	3.60 ± 0.15	9.50 ± 0.25	5.35 ± 0.15
<b>EF13B</b>	13.00 ± 0.25	6.75 ± 0.15	3.60 ± 0.15	3.60 ± 0.15	9.50 ± 0.20	4.90 ± 0.15
<b>EF13.1</b>	13.10 <sup>+0.50</sup> <sub>-0.40</sub>	7.20 ± 0.10	3.55 ± 0.15	3.65 ± 0.15	9.40min	5.45 ± 0.15
<b>EF13.5</b>	13.50 ± 0.30	6.75 ± 0.15	6.00 <sup>+0.15</sup> <sub>-0.20</sub>	2.85 ± 0.15	10.50 ± 0.25	5.25 ± 0.20
<b>EF16</b>	16.10 ± 0.60	8.05 ± 0.15	4.50 ± 0.20	4.55 ± 0.15	11.30min	5.90 ± 0.20
<b>EF16A</b>	16.00 ± 0.30	7.95 ± 0.15	4.35 ± 0.15	4.35 ± 0.15	11.40min	5.80 ± 0.15
<b>EF16C</b>	16.00 <sup>+0.70</sup> <sub>-0.50</sub>	8.05 ± 0.15	4.50 ± 0.20	4.55 ± 0.15	11.80min	5.90 ± 0.20
<b>EF16H</b>	16.10 ± 0.60	8.00 ± 0.25	3.75 ± 0.25	3.80 ± 0.20	10.90 ± 0.50	5.40 ± 0.20
<b>EF16.2</b>	16.20 ± 0.40	9.50 ± 0.15	3.45 ± 0.15	4.60 ± 0.15	11.30min	7.25 ± 0.20
<b>EF16.2A</b>	16.20 ± 0.40	8.35 ± 0.15	4.50 ± 0.15	4.50 ± 0.15	11.70min	6.20 ± 0.20
<b>EF17</b>	17.00 <sup>+0.70</sup> <sub>-0.50</sub>	8.20 <sup>+0.00</sup> <sub>-0.30</sub>	4.70 <sup>+0.00</sup> <sub>-0.40</sub>	4.70 <sup>+0.00</sup> <sub>-0.30</sub>	12.30 <sup>+0.60</sup> <sub>-0.00</sub>	5.70 <sup>+0.40</sup> <sub>-0.00</sub>
<b>EF20</b>	20.00 ± 0.40	9.90 ± 0.20	5.65 ± 0.25	5.70 ± 0.20	14.10min	7.20 ± 0.20
<b>EF20/20.4</b>	20.00 ± 0.40	10.20 ± 0.20	5.65 ± 0.25	5.70 ± 0.20	14.10min	7.50 ± 0.20
<b>EF20A</b>	20.00 ± 0.40	10.60 ± 0.15	5.70 ± 0.20	5.70 ± 0.20	14.40 ± 0.30	7.60 ± 0.15
<b>EF20F</b>	20.00 ± 0.40	10.15 ± 0.15	10.75 ± 0.25	5.70 ± 0.20	14.10min	7.45 ± 0.20
<b>EF20.4</b>	20.40 ± 0.40	9.90 ± 0.20	5.65 ± 0.25	5.70 ± 0.20	14.60min	7.20 ± 0.20
<b>EF20.5</b>	20.50 ± 0.40	9.80 ± 0.20	4.65 ± 0.25	5.70 ± 0.20	14.60min	7.10 ± 0.20
<b>EF24</b>	24.00 ± 0.60	12.00 ± 0.35	5.75 ± 0.25	5.80 ± 0.20	16.30 ± 0.40	8.25 ± 0.25
<b>EF25</b>	25.05 ± 0.75	12.55 ± 0.25	7.20 ± 0.30	7.25 ± 0.25	17.50min	8.95 ± 0.25
<b>EF25A</b>	25.05 ± 0.75	12.80 ± 0.25	8.85 ± 0.25	7.25 ± 0.25	17.50min	8.95min

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>EF10</b>	3.02	23.23	7.68	178.41	0.90
<b>EF12</b>	2.64	32.15	12.18	391.59	2.06
<b>EF12.6</b>	2.39	29.60	12.40	367.00	1.88
<b>EF12.6A</b>	2.44	31.05	12.70	394.30	2.06
<b>EF12.6D</b>	2.41	29.77	12.35	367.66	1.76
<b>EF12.6F</b>	2.60	33.47	12.89	431.43	2.06
<b>EF12.6K/3.7</b>	2.41	29.72	12.35	367.04	1.92
<b>EF12.8</b>	2.42	43.97	18.19	799.76	3.94
<b>EF12.9</b>	2.38	30.15	12.63	380.79	1.88
<b>EF13/14</b>	2.41	33.44	13.85	463.21	2.28
<b>EF13B</b>	2.68	32.30	12.07	389.86	2.04
<b>EF13.1</b>	2.58	33.17	12.88	427.23	0.94
<b>EF13.5</b>	1.88	33.28	17.67	588.06	2.86
<b>EF16</b>	1.87	37.60	20.10	754.00	3.70
<b>EF16A</b>	1.93	37.11	19.22	713.25	3.62
<b>EF16C</b>	2.01	37.69	18.74	706.49	3.70
<b>EF16H</b>	2.08	35.30	17.00	602.00	3.30
<b>EF16.2</b>	2.71	43.08	15.91	685.30	4.52
<b>EF16.2A</b>	1.95	38.80	19.90	772.00	3.92
<b>EF17</b>	1.87	38.34	20.48	785.20	3.90
<b>EF20</b>	1.34	44.90	33.50	1500.00	7.30
<b>EF20/20.4</b>	1.47	47.15	32.10	1513.52	7.24
<b>EF20A</b>	1.47	48.22	32.71	1577.54	7.98
<b>EF20F</b>	0.79	47.16	59.95	2827.30	14.00
<b>EF20.4</b>	1.49	46.62	31.28	1458.60	7.46
<b>EF20.5</b>	1.80	46.32	25.75	1192.74	8.42
<b>EF24</b>	1.38	53.82	38.88	2092.52	11.00
<b>EF25</b>	1.09	57.50	52.84	3038.30	14.68
<b>EF25A</b>	0.87	57.87	66.16	3829.30	19.44

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )								AL ± 30% (nH/N <sup>2</sup> )			
	P4	P41	P45	P451	P452	P5	P61	A05	A07	A10(L)	A121(L)	A151(L)
<b>EF10</b>	670											
<b>EF12</b>												2500min
<b>EF12.6</b>	830		1050			780		1660	2100	3500	4000	4650
<b>EF12.6A</b>	800											
<b>EF12.6D</b>	830											
<b>EF12.6F</b>										2450min		
<b>EF12.6K/3.7</b>	850											
<b>EF12.8</b>												
<b>EF12.9</b>	830									3900		
<b>EF13/14</b>	860											
<b>EF13B</b>	850											
<b>EF13.1</b>	750											
<b>EF13.5</b>	1020											
<b>EF16</b>	1100					1000		1950	2540	4200min	4500min	5000min
<b>EF16A</b>								1660	1950			
<b>EF16C</b>	1100											
<b>EF16H</b>		800										
<b>EF16.2</b>	1000											
<b>EF16.2A</b>								1660				
<b>EF17</b>	1265											
<b>EF20</b>	1570		2000			1450		2920	3800	6350min	6500min	
<b>EF20/20.4</b>	1550											
<b>EF20A</b>	1450								2400	2940	3560	
<b>EF20F</b>	2850											
<b>EF20.4</b>										6250min		
<b>EF20.5</b>					770(P491)							
<b>EF24</b>	1800											
<b>EF25</b>	2000		2500			1870		3750	4880	8150min		
<b>EF25A</b>	1800min											

Remark:


1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Gapped core is available, please specify upon request & ordering. ACME's standard gapped core set is a combination of one gapped core and one ungapped core. If gapping on both pcs to make a set is needed, please specify upon request & ordering.
3. L : Mirror Finished Lapping. Please specify upon request & ordering by adding "L" at the end of Core Size if you need.
4. Customized dimensions are available.

## Type : UR Cores

Ordering Code:

P4	UR41
Material 材質	Core Size 品名

Shape:

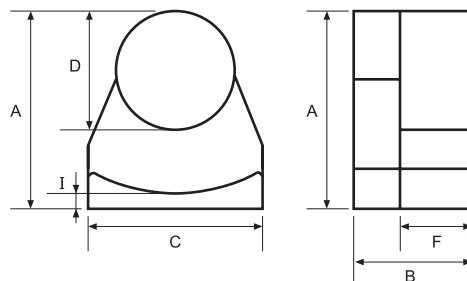

### DIMENSIONS

CORES	DIMENSIONS (mm)					
	A	B	C	D	F	I
UR41	41.00 ± 0.80	30.00 ± 0.20	34.00 ± 0.50	20.00 ± 0.35	22.00 ± 0.30	4.50 ± 0.25

### EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
UR41	0.40	126.77	314.16	39825.65	201.00

### ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )				AL ± 30% (nH/N <sup>2</sup> )			
	P4	P47	P5	A07	A10	A102	A121	A151
UR41		4550						

Remark:


Customized dimensions are available.

## Type : OT Cores

Ordering Code:

P4	OT16.6
Material 材質	Core Size 品名

Shape:

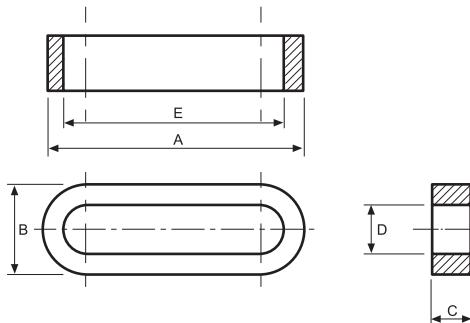

### DIMENSIONS

CORES	DIMENSIONS (mm)				
	A	B	C	D	E
OT16.6	16.60 ± 0.30	5.60 ± 0.20	2.50 ± 0.20	2.80 ± 0.15	13.80 ± 0.25

### EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
OT16.6	10.05	35.19	3.50	123.17	0.60

### ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )				AL ± 30% (nH/N <sup>2</sup> )			
	P4	P5	A05	A07	A10	A102	A121	A151
OT16.6								1350

Remark:

Customized dimensions are available.

## Type : UU Cores

Ordering Code: A10



Material  
材質

UU10.5



Core Size  
品名

Shape:



Type:1





Type:2





Type:3

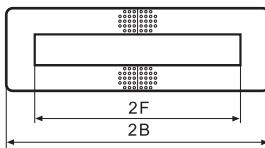

Type:4

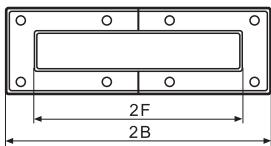

Type:5



## DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)						Type
	A	B	C	E	F	H	
UU4.6	4.60 ± 0.20	6.05 ± 0.10	3.60 ± 0.10	2.40min	4.65 ± 0.15	—	1
UU4.7	4.70 ± 0.10	1.90 ± 0.10	2.40 ± 0.10	3.00min	1.20 ± 0.10	—	1
UU5.2	5.20 <sup>+0.10</sup> <sub>-0.20</sub>	7.40 ± 0.15	2.85 ± 0.10	2.25 ± 0.15	5.85 ± 0.15	—	1
UU8.5	8.50 ± 0.20	4.70 ± 0.15	3.60 ± 0.15	3.50 ± 0.15	2.40 ± 0.15	—	1
UU8.5A	8.50 ± 0.15	3.50 ± 0.10	10.00 ± 0.15	4.00 ± 0.15	1.00 ± 0.10	—	1
UU8.65	8.65 ± 0.20	7.50 ± 0.15	4.00 ± 0.20	4.60min	5.60 ± 0.15	1.90 ± 0.10	5
UU9.5	9.50 ± 0.20	6.80 ± 0.20	3.90 ± 0.10	3.50 ± 0.20	3.50 ± 0.20	—	1
UU9.8	9.80 ± 0.20	7.20 ± 0.10	2.70 ± 0.20	4.20min	4.20 ± 0.20	—	1
UU9.8B	9.80 ± 0.30	9.00 ± 0.20	3.40 ± 0.20	3.65min	6.00 ± 0.20	—	1
UU10B	10.00 <sup>+0.30</sup> <sub>-0.20</sub>	5.00 <sup>+0.00</sup> <sub>-0.20</sub>	6.00 ± 0.20	4.50min	2.40 ± 0.10	—	1
UU10.5	10.50 ± 0.25	8.00 ± 0.30	5.00 ± 0.15	5.35min	5.30 ± 0.30	—	1
UU11	11.00 <sup>+0.00</sup> <sub>-0.60</sub>	8.10 <sup>+0.10</sup> <sub>-0.20</sub>	5.45 ± 0.20	5.50 ± 0.20	5.80 <sup>+0.20</sup> <sub>-0.10</sub>	—	1
UU11.2A	11.15 ± 0.25	14.05 ± 0.10	7.40 ± 0.20	4.55 ± 0.25	10.80 ± 0.15	—	1
UU12	12.00 ± 0.30	7.90 ± 0.10	4.45 ± 0.15	7.20min	5.65 ± 0.10	—	1
UU13.5	13.50 ± 0.25	10.50 ± 0.10	3.55 ± 0.20	4.15 ± 0.15	7.90 ± 0.10	—	2
UU14	14.00 ± 0.30	30.60 ± 0.20	3.40 ± 0.25	5.00 ± 0.30	23.60 ± 0.20	—	4
UU15	15.20 ± 0.70	11.40 ± 0.50	6.45 ± 0.25	5.20min	6.25 ± 0.35	—	1
UU15.1	15.10 ± 0.30	30.65 ± 0.20	3.20 ± 0.20	6.10 ± 0.25	24.65 ± 0.20	—	4
UU15.1B	15.10 ± 0.30	32.00 ± 0.20	3.20 ± 0.25	6.10 ± 0.30	26.00 ± 0.20	—	1
UU16	16.00 ± 0.30	10.00 ± 0.20	6.00 ± 0.15	6.70min	6.00 ± 0.15	—	1
UU16.5	16.50 ± 0.30	29.90 ± 0.20	3.70 ± 0.15	5.50 ± 0.25	23.90 ± 0.20	—	3
UU16.5A	16.50 ± 0.30	22.65 ± 0.20	3.70 ± 0.20	5.50 ± 0.25	16.65 ± 0.20	—	3
UU16.6	16.60 ± 0.30	29.30 ± 0.30	4.00 ± 0.20	5.60 ± 0.20	24.30 ± 0.20	—	4
UU17.8	17.80 ± 0.30	35.50 ± 0.20	3.30 ± 0.20	5.80 ± 0.25	29.50 ± 0.20	—	4
UU17.8B	17.80 ± 0.30	36.20 ± 0.20	3.30 ± 0.20	5.80 ± 0.25	30.20 ± 0.20	—	1
UU18	18.00 ± 0.30	10.50 ± 0.15	8.00 ± 0.20	7.00 ± 0.20	6.50 ± 0.15	—	2
UU18.2	18.20 ± 0.40	31.20 ± 0.20	3.50 ± 0.20	6.20 ± 0.25	25.20 ± 0.20	—	4
UU18.5	18.50 ± 0.30	36.90 ± 0.20	5.70 ± 0.18	6.50 ± 0.25	30.90 ± 0.20	—	1
UU19	19.05 ± 0.35	17.00 ± 0.15	2.00 ± 0.10	4.35 ± 0.10	11.60 ± 0.15	—	2
UU19.4	19.40 ± 0.30	11.00 ± 0.20	4.50 ± 0.20	6.60 ± 0.30	8.00 ± 0.20	6.40 ± 0.20	5
UU19.6	19.60 ± 0.30	18.30 ± 0.20	5.00 ± 0.15	10.60 ± 0.30	13.30 ± 0.20	—	1
UU19.6A	19.60 ± 0.40	37.60 ± 0.20	3.80 ± 0.20	5.00 ± 0.25	29.80 ± 0.20	—	4
UU19.6B	19.60 ± 0.30	38.00 ± 0.20	3.80 ± 0.20	5.00 ± 0.25	30.20 ± 0.20	—	1
UU22	22.00 ± 0.30	15.00 ± 0.25	10.00 ± 0.30	12.00min	10.00 ± 0.25	—	1
UU24	24.00 ± 0.35	21.60 ± 0.20	3.60 ± 0.20	5.00 ± 0.20	13.60 ± 0.20	—	4
UU32.5	32.50 ± 0.50	27.75 ± 0.25	12.50 ± 0.20	13.50 ± 0.20	18.20 ± 0.20	—	1
UU93	93.00 ± 1.80	76.00 ± 0.50	30.00 ± 0.60	34.60min	48.00 ± 0.90	—	1

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>i</sub> (mm <sup>-1</sup> )	L <sub>e</sub> (mm)	A <sub>e</sub> (mm <sup>2</sup> )	V <sub>e</sub> (mm <sup>3</sup> )	W <sub>tg</sub> (set)
UU4.6	6.74	26.94	4.00	107.80	0.56
UU4.7	7.52	13.31	1.77	23.56	0.12
UU5.2	4.69	32.64	4.25	138.60	0.70
UU8.5	2.78	24.11	8.66	208.77	1.12
UU8.5A	0.81	19.43	23.93	465.00	2.48
UU8.65	5.01	38.06	7.60	289.26	1.46
UU9.5	2.54	30.85	12.11	373.87	1.96
UU9.8	4.30	34.00	8.00	271.00	1.26
UU9.8B	4.05	41.09	10.14	416.62	2.22
UU10B	1.68	26.99	16.04	432.97	2.24
UU10.5	3.14	40.00	13.00	518.00	2.52
UU11	3.00	41.88	13.95	584.26	2.92
UU11.2A	2.57	62.58	24.33	1523.00	7.76
UU12	4.39	44.54	10.14	451.63	2.24
UU13.5	6.78	89.15	13.14	636.83	3.72
UU14	7.51	120.60	16.05	1935.54	10.14
UU15	1.58	51.00	33.00	1673.00	8.16
UU15.1	8.46	126.35	14.93	1886.41	9.60
UU15.1B	8.84	131.74	14.90	1963.54	10.00
UU16	1.93	52.00	27.00	1381.00	6.56
UU16.5	6.04	124.57	20.62	2568.33	13.00
UU16.5A	4.62	95.58	20.70	1978.59	10.22
UU16.6	5.76	124.78	21.65	2701.31	13.50
UU17.8	7.79	142.71	18.32	2614.45	14.60
UU17.8B	7.64	151.25	19.80	2994.77	14.86
UU18	1.42	53.90	37.90	2047.00	11.00
UU18.2	6.29	132.05	21.00	2773.05	13.84
UU18.5	4.55	155.45	34.20	5316.39	26.36
UU19	5.47	70.60	12.90	910.74	7.30
UU19.4	2.79	53.93	19.35	1043.55	6.98
UU19.6	3.84	89.15	23.21	2069.17	10.15
UU19.6A	5.46	152.87	27.99	4278.83	22.00
UU19.6B	5.52	154.47	27.99	4323.62	21.66
UU22	1.63	80.06	49.09	3929.91	19.40
UU24	2.81	91.56	32.58	2982.94	15.20
UU32.5	1.11	129.31	116.80	15103.41	82.26
UU93	0.42	354.00	840.00	297000.00	1500.00

## ■ EFFECTIVE PARAMETERS

CORES	AL ± 25% (nH/N <sup>2</sup> )							AL ± 30% (nH/N <sup>2</sup> )				
	P4	P41	P451	P47	P5	P61	A05	A07	A10	A10(L)	A121(L)	A151(L)
UU4.6							600					
UU4.7	180											
UU5.2	480											
UU8.5												
UU8.5A					1400(P51)							
UU8.65												
UU9.5							1300					
UU9.8	500				450		930	1300	1470	1600	1309min	1509min
UU9.8B									1400			
UU10B								1900				
UU10.5	720			800	650		1220	1650	1800	2800	2800min	4010
UU11	720						1300					
UU11.2A	930											
UU12												
UU13.5	680											
UU14	430											
UU15	1350			1500	1300		2680	3320		6000		
UU15.1	340											
UU15.1B	320											
UU16	1140				1050		2140	2720	3280	5710	5100min	5700min
UU16.5	470											
UU16.5A												
UU16.6	490											
UU17.8	430											
UU17.8B	440											
UU18									4000			
UU18.2	500											
UU18.5	500											
UU19	500											
UU19.4										4200		
UU19.6	695											
UU19.6A	530											
UU19.6B	570											
UU22					1160							
UU24				1300								
UU32.5	2490											
UU93	5700 <sup>± 20%</sup>											

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 10Ts. If testing condition is different from ACME's, please specify upon request &amp; ordering.

2. L : Mirror Finished Lapping. Please specify upon request &amp; ordering by adding "L" at the end of Core Size if you need.

3. Customized dimensions are available.


## Type : I Cores

Ordering Code: P4 I3.95\*3.95\*5.55


Material 材質	Core Size 品名
----------------	-----------------

Shape:

Type:1

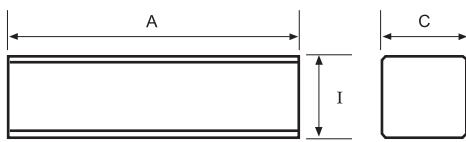

Type:2

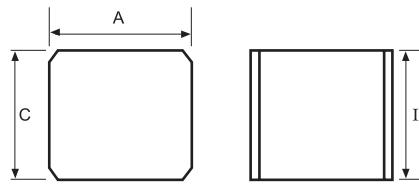

## DIMENSIONS

CORES	DIMENSIONS (mm)					Wt(g/set)	Type
	A	B	B1	C	I		
I3.95x3.95x5.55	3.95 ± 0.10	—	—	3.95 ± 0.10	5.55 ± 0.05	0.42	2
I4.5x4.5x5.2	4.50 ± 0.10	—	—	4.50 ± 0.10	5.20 ± 0.05	1.01	1
I4.6x3.2x3.43	4.60 ± 0.10	—	—	3.20 ± 0.10	3.43 ± 0.05	0.24	2
I4.8x4.85x5.85	4.80 ± 0.10	—	—	4.85 ± 0.10	5.75 ± 0.10	0.07	2
I5.7x3.45x6	5.70 ± 0.10	—	—	3.45 ± 0.10	6.00 ± 0.05	0.56	1
I6x3.45x5.7	6.00 ± 0.10	—	—	3.45 ± 0.10	5.70 ± 0.05	0.53	1
I6x4.2x7.28	6.00 ± 0.10	—	—	4.20 ± 0.10	7.28 ± 0.05	0.87	1
I6x6x7	6.00 ± 0.10	—	—	6.00 ± 0.10	7.00 ± 0.05	1.20	2
I6.1x4.9x7.5	6.10 ± 0.10	—	—	4.90 ± 0.10	7.50 ± 0.05	1.05	1
I6.5x4.85x7.5	6.50 ± 0.10	—	—	4.85 ± 0.10	7.50 ± 0.05	1.12	1
I7x5x6.3	7.00 ± 0.10	—	—	5.00 ± 0.10	6.30 ± 0.05	1.04	1
I8x1.25x0.9	8.00 ± 0.25	1.25 <sup>+0.00</sup> <sub>-0.30</sub>	0.90 <sup>+0.00</sup> <sub>-0.30</sub>	1.00 ± 0.10	0.90 <sup>+0.00</sup> <sub>-0.50</sub>	0.02	3
I8.6x7.7x2.85	8.60 ± 0.10	—	—	7.70 ± 0.10	2.85 ± 0.05	0.89	1
I8x8x8	8.00 <sup>+0.25</sup> <sub>-0.15</sub>	—	—	8.00 <sup>+0.25</sup> <sub>-0.15</sub>	8.00 <sup>+0.25</sup> <sub>-0.15</sub>	2.48	2
I8.5x8.5x8.4	8.50 ± 0.15	—	—	8.50 ± 0.15	8.40 ± 0.10	2.86	2
I10x5x1	10.00 ± 0.15	—	—	5.00 ± 0.10	1.00 ± 0.10	0.23	1
I13.7x7.15x1.5	13.70 ± 0.30	—	—	7.15 ± 0.20	1.50 ± 0.10	0.68	1
I15.5x13x11.6	15.50 ± 0.15	—	—	13.00 ± 0.15	11.60 ± 0.10	11.05	2
I19.8x6.6x2.2	19.80 ± 0.40	—	—	6.60 ± 0.20	2.20 ± 0.15	1.39	1
I20x19x4	20.00 ± 0.40	—	—	19.00 ± 0.40	4.00 ± 0.10	7.30	1
I21x18x7	21.00 ± 0.35	—	—	18.00 ± 0.30	7.00 ± 0.15	12.82	1
I30x4x2	30.00 ± 0.50	—	—	4.00 ± 0.15	2.00 ± 0.15	1.12	1
I35x35x0.8	35.00 ± 0.60	—	—	35.00 ± 0.60	0.80 ± 0.10	4.83	2
I45x7x3	45.00 ± 0.50	—	—	7.00 ± 0.20	3.00 ± 0.10	4.54	1
I47x9x3	47.00 ± 0.70	—	—	9.00 ± 0.20	3.00 ± 0.15	6.02	1
I50x8Ax2.5	50.00 ± 0.70	—	—	8.00 ± 0.20	2.50 ± 0.10	4.90	1
I50x8Bx2.5	50.00 ± 0.70	—	—	8.00 ± 0.20	2.50 ± 0.15	4.80	1
I50x8Dx2.5	50.00 ± 0.40	—	—	8.00 ± 0.20	2.50 ± 0.10	4.58	1

Remark: Customized dimensions are available.


## Type : I Cores

Ordering Code:

P41	55*7*3
Material 材質	Core Size 品名

Shape:

Type:3

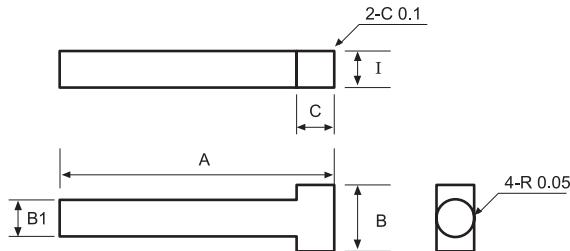

### DIMENSIONS

CORES	DIMENSIONS (mm)			Wt(g/set)	Type
	A	C	I		
<b>I50x12x2.8</b>	50.00 ± 0.80	12.05 ± 0.30	2.80 ± 0.15	8.00	1
<b>I50x30x0.8</b>	50.00 ± 0.80	30.00 ± 0.50	0.80 ± 0.10	5.76	1
<b>I53x12x3</b>	53.00 ± 0.80	11.90 ± 0.20	3.00 ± 0.15	9.10	1
<b>I55x7x3</b>	55.00 ± 1.00	7.00 ± 0.20	3.00 ± 0.20	5.54	1
<b>I60x7.9Ax2</b>	60.00 ± 1.00	7.90 ± 0.20	2.00 ± 0.20	4.00	1
<b>I60x9x2.5</b>	60.00 ± 1.00	9.00 ± 0.20	2.50 ± 0.15	6.45	1
<b>I60x9Ax4</b>	60.00 ± 0.75	9.00 ± 0.25	4.00 ± 0.10	10.37	1
<b>I62x8x3</b>	62.00 ± 1.00	8.00 ± 0.30	3.00 ± 0.20	7.21	1
<b>I63x7x3</b>	63.00 ± 1.00	7.00 ± 0.20	3.00 ± 0.15	6.30	1
<b>I64x8x3</b>	64.00 ± 1.00	8.00 ± 0.20	3.00 ± 0.10	7.40	1
<b>I66x12x3</b>	66.00 ± 1.00	12.00 ± 0.20	3.00 ± 0.15	11.40	1
<b>I66x12Ax3</b>	66.00 ± 0.40	12.00 <sup>+0.00</sup> <sub>-0.30</sub>	3.00 <sup>+0.00</sup> <sub>-0.15</sub>	11.40	1
<b>I68x7x2.9</b>	68.00 ± 1.00	7.00 ± 0.20	2.90 ± 0.10	6.63	1
<b>I70x13Bx4</b>	70.00 ± 1.00	13.00 ± 0.25	4.00 ± 0.20	17.29	1
<b>I79.5x8x2.5</b>	79.50 ± 1.00	8.00 ± 0.30	2.50 ± 0.15	7.63	1
<b>I80x19x4</b>	80.00 ± 1.20	19.00 ± 0.30	4.00 ± 0.10	28.88	1
<b>I86.5x13.25x4.85</b>	86.50 ± 0.85	13.25 ± 0.25	4.85 ± 0.15	26.68	1
<b>I86x14.65x4.85</b>	86.00 ± 1.00	14.65 ± 0.25	4.85 ± 0.15	29.33	1
<b>I90x8x3.85</b>	90.00 ± 1.50	8.00 ± 0.30	3.85 ± 0.15	13.31	1
<b>I99.5x12x5</b>	99.50 ± 2.00	12.00 ± 0.30	5.00 ± 0.15	28.66	1
<b>I99.5x12Ax4.8</b>	99.50 ± 1.50	12.00 ± 0.25	4.80 ± 0.20	55.73	1
<b>I102x7x3</b>	102.00 ± 0.80	7.00 ± 0.30	3.00 ± 0.15	10.25	1
<b>I110x6x5</b>	110.00 ± 1.50	6.00 ± 0.35	5.00 ± 0.25	14.20	1
<b>I110x7x3</b>	110.00 ± 0.80	7.00 ± 0.30	3.00 ± 0.15	10.65	1
<b>I120x8Ax4</b>	120.00 ± 1.50	8.00 ± 0.30	4.00 ± 0.20	18.24	1

Remark: Customized dimensions are available.


## Type : R Cores

Ordering Code:


P4	R8*22
Material 材質	Core Size 品名

Shape:

Type:1

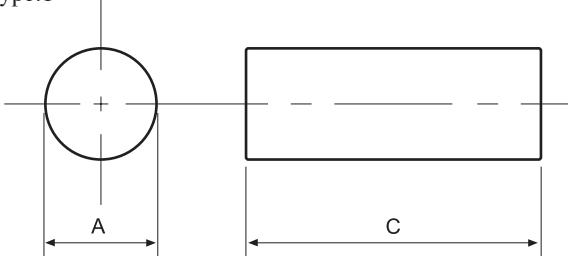

Type:2

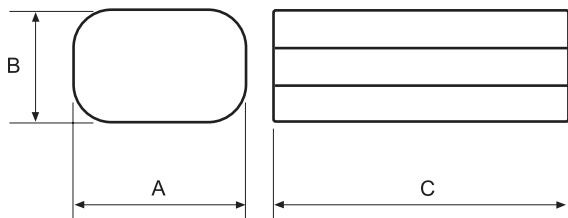


## DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			Wt(g/set)	Type
	A	B	C		
R1.16x7.1	1.16 ± 0.08	—	7.10 ± 0.10	0.04	1
R1.7x18	1.70 ± 0.15	—	18.00 ± 0.50	0.18	1
R2.5x18	2.50 ± 0.20	—	18.00 ± 0.50	0.40	1
R3x19	3.00 ± 0.20	—	19.00 ± 0.20	0.65	1
R3.5x5.4	3.50 ± 0.10	—	5.40 <sup>+0.10</sup> <sub>-0.05</sub>	0.21	1
R4x5	4.00 ± 0.10	—	5.00 <sup>+0.10</sup> <sub>-0.05</sub>	0.30	1
R4.2x6.1	4.20 ± 0.10	—	6.10 ± 0.10	0.80	1
R4.3x7	4.30 ± 0.10	—	7.00 ± 0.10	0.64	1
R4.5x5.8	4.50 ± 0.10	—	5.80 ± 0.10	0.50	1
R4.5x22	4.50 ± 0.20	—	22.00 ± 0.45	1.69	1
R4.7x4.3	4.70 ± 0.10	—	4.30 ± 0.10	0.36	4
R5x3.6x8	5.00 ± 0.15	3.60 ± 0.15	8.00 ± 0.15	0.50	2
R5x7	5.00 ± 0.10	—	7.00 ± 0.10	0.51	1
R5Bx30	5.00 <sup>+0.00</sup> <sub>-0.30</sub>	—	30.00 ± 1.00	2.63	1
R5.5x7.9	5.50 ± 0.10	—	7.90 ± 0.10	0.93	1
R5.8x5.2	5.80 ± 0.10	—	5.20 ± 0.10	0.65	1
R5.9x5.8	5.90 ± 0.10	—	5.80 <sup>+0.00</sup> <sub>-0.10</sub>	0.75	1
R6x15	6.00 ± 0.15	—	15.00 ± 0.20	4.06	1
R6.35Ax22	6.35 ± 0.20	—	22.20 ± 0.50	3.31	1
R6.5x8.2	6.50 ± 0.15	—	8.20 ± 0.20	1.29	1
R6.65x30	6.65 ± 0.15	—	30.00 ± 0.60	5.07	1

Remark:

- Black epoxy coating, breakdown voltage : 500vdc min 3sec 0.5mA.
- Customized dimensions are available.

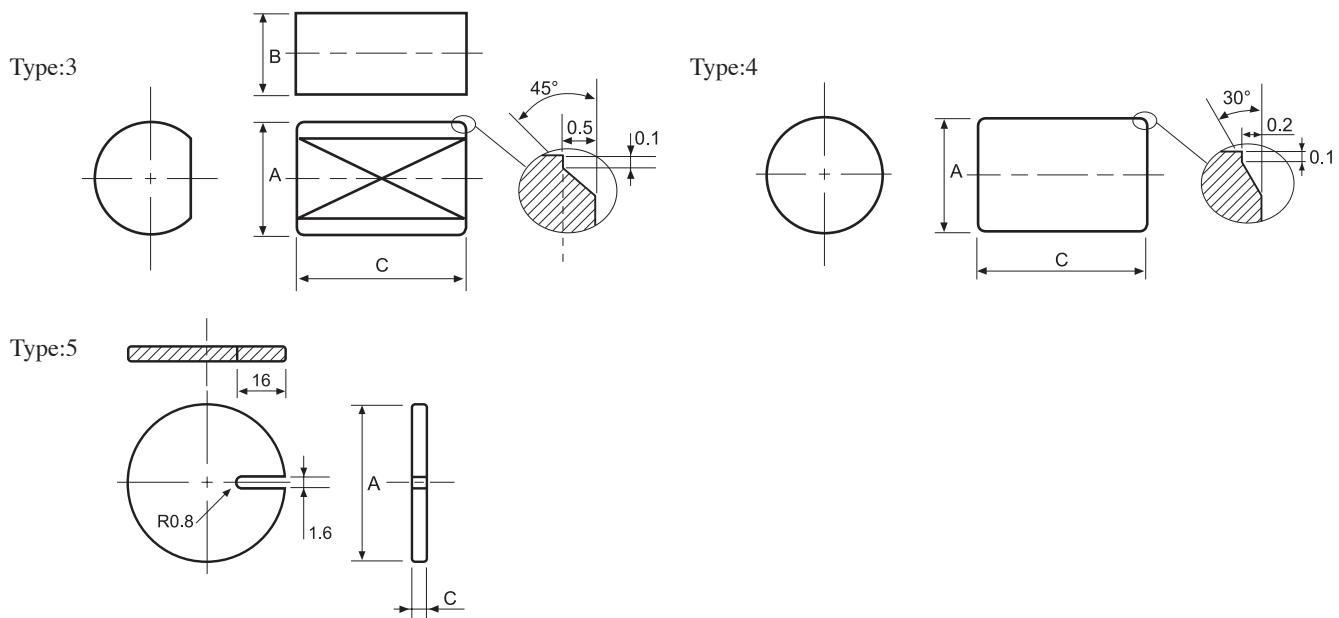

## DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			Wt(g/set)	Type
	A	B	C		
R7x7.6	7.00 ± 0.15	—	7.60 ± 0.10	1.40	1
R7.1x1.0	7.10 ± 0.15	—	1.00 ± 0.08	0.19	1
R7.5x20	7.60 ± 0.10	—	19.85 ± 0.40	4.50	1
R7.85x25	7.85 <sup>+0.00</sup> <sub>-0.40</sub>	—	25.00 ± 0.80	5.46	1
R8x22	8.00 ± 0.20	—	22.00 ± 0.60	5.20	1
R8x25	8.00 ± 0.60	—	25.00 ± 0.60	6.03	1
R8Dx25	7.85 ± 0.15	—	25.00 ± 0.80	5.74	1
R9.4x8	9.40 ± 0.20	—	8.00 ± 0.20	2.63	1
R10x60	10.00 ± 0.20	—	60.00 ± 0.50	22.38	1
R12x32	12.00 ± 0.30	11.00 ± 0.30	32.00 ± 1.00	16.00	3
R12Dx3.5	12.00 ± 0.20	—	3.50 ± 0.10	1.90	1
R12.6x7.75	12.60 ± 0.20	—	7.75 ± 0.20	4.64	4
R13.2x5	13.20 ± 0.20	—	5.00 ± 0.10	3.32	1
R14x0.8	14.00 ± 0.20	—	0.80 ± 0.10	0.59	1
R14.35x5	14.35 ± 0.25	—	5.00 ± 0.10	3.88	1
R15x1.9	15.00 ± 0.20	—	1.90 ± 0.05	1.63	1
R16.5x2.1	16.50 ± 0.25	—	2.10 ± 0.20	2.17	1
R20x4	20.00 ± 0.35	—	4.00 ± 0.35	6.03	1
R23x1.0	23.00 ± 0.35	—	1.00 ± 0.10	2.01	1
R29x17.4	29.00 ± 0.40	—	17.40 ± 0.30	54.30	4
R30x40	30.00 ± 0.45	—	40.00 ± 0.50	137.20	4
R50x1	50.00 ± 0.70	—	1.00 ± 0.10	9.72	1
R50Ax1.2	50.00 ± 0.75	—	1.20 ± 0.15	11.22	5

Remark:

- Black epoxy coating, breakdown voltage : 500vdc min 3sec 0.5mA.
- Customized dimensions are available.

## Type : ZT Cores

Ordering Code:

P47


ZT5.6

Material  
材質


Core Size  
品名

Shape:


Type:1

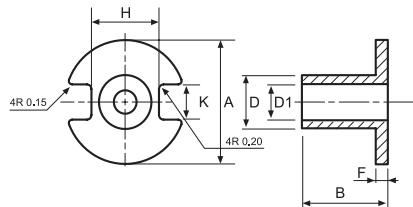


Type:2

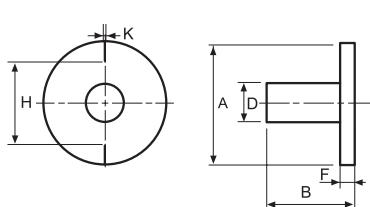

Type:3

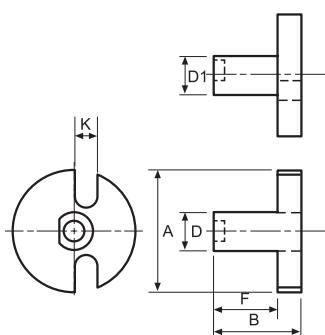

Type:4

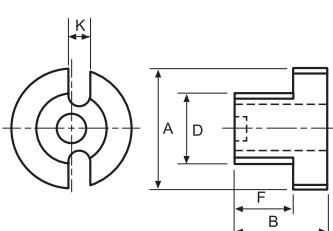

## DIMENSIONS

CORES	DIMENSIONS (mm)							Wt(g/set)	Type
	A	C	D	D1	F	H	K		
<b>ZT5.35H</b>	$5.50^{+0.00}_{-0.30}$	$1.65^{+0.00}_{-0.02}$	$2.40^{+0.00}_{-0.15}$	$0.95^{+0.10}_{-0.00}$	$1.10^{+0.15}_{-0.00}$	$3.10^{+0.00}_{-0.20}$	$1.40^{+0.20}_{-0.00}$	0.05	1
<b>ZT5.6</b>	$5.60 \pm 0.10$	4.07ref	$1.70 \pm 0.10$	—	$3.90 \pm 0.15$	3.80ref	0.10ref	0.13	2
<b>ZT8.8A</b>	$9.00 \pm 0.20$	$4.60 \pm 0.15$	$3.00 \pm 0.15$	$2.60 \pm 0.15$	$3.00 \pm 0.15$	—	$1.80 \pm 0.20$	0.90	3
<b>ZT13.8</b>	$13.80 \pm 0.20$	$5.50 \pm 0.15$	$6.50 \pm 0.15$	—	$3.60 \pm 0.15$	—	$2.70 \pm 0.25$	3.32	4
<b>ZT24.8</b>	$24.80^{+0.75}_{-0.00}$	$10.00 \pm 0.15$	$14.60 \pm 0.25$	—	$5.10 \pm 0.15$	—	$3.00 \pm 0.25$	21.16	4

Remark: Customized dimensions are available.

## Type : RID Cores


Ordering Code:

A05	RID3.51*2.06*2.54	HP
Material 材質	Core Size 品名	Coating 塗裝


C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free

Shape:


Type:1

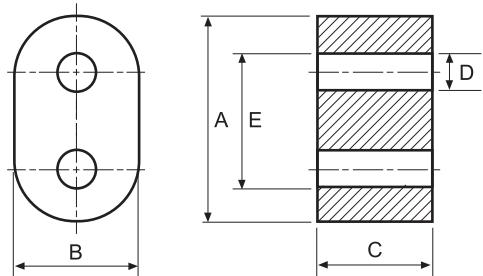

Type:2



Type:3

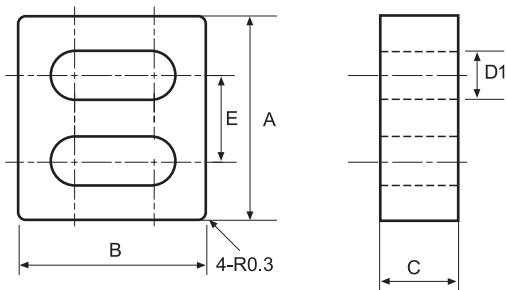

## DIMENSIONS

CORES	DIMENSIONS (mm)						Type
	A	B	C	D	D1	E	
<b>RID2.5x2.1x1.0</b>	2.50 ± 0.15	2.10 ± 0.15	1.00 ± 0.15	1.00 ± 0.15	0.55 ± 0.15	1.20 ± 0.15	2
<b>RID3.45x2.01x2.4</b>	3.45 ± 0.15	2.01 ± 0.15	2.40 ± 0.15	0.86 ± 0.10	—	2.31 ± 0.10	1
<b>RID3.5x2x2HP</b>	3.50 ± 0.15	2.00 ± 0.15	2.00 ± 0.15	0.90 ± 0.10	—	1.78 (ref)	3
<b>RID3.51x2.06x2.54</b>	3.51 ± 0.15	2.06 ± 0.15	2.54 ± 0.15	0.86 ± 0.10	—	2.34 ± 0.10	1
<b>RID3.6x2.1x1.8</b>	3.60 ± 0.25	2.10 ± 0.20	1.80 ± 0.15	0.80 ± 0.15	—	2.33 ± 0.25	1
<b>RID3.6Ax2x1.8</b>	3.60 ± 0.25	2.00 ± 0.20	1.80 ± 0.20	0.86 ± 0.15	—	2.37 ± 0.22	1
<b>RID3.66x2.36x2.36</b>	3.66 ± 0.20	2.36 ± 0.20	2.36 ± 0.15	1.12 ± 0.10	—	2.50 ± 0.20	1
<b>RID5x3x3</b>	5.00 ± 0.30	3.00 ± 0.20	3.00 ± 0.30	1.20 ± 0.20	—	3.20 ± 0.20	1
<b>RID6.9x4.06x6.35</b>	6.90 ± 0.30	4.06 ± 0.25	6.35 ± 0.38	1.85 ± 0.15	—	2.92 (ref)	3
<b>RID13.3x7.5x14.35</b>	13.30 ± 0.50	7.50 ± 0.25	14.35 ± 0.40	3.80 ± 0.20	—	9.50 ± 0.20	1
<b>RID19.45x9.5x12.7</b>	19.45 ± 0.50	9.50 ± 0.25	12.70 ± 0.45	4.75 ± 0.20	—	9.90 ± 0.25	3

Remark: Customized dimensions are available.


## Type : ET Cores

Ordering Code:	A07	ET28
	Material 材質	Core Size 品名

Shape:

Type:1

Type:2

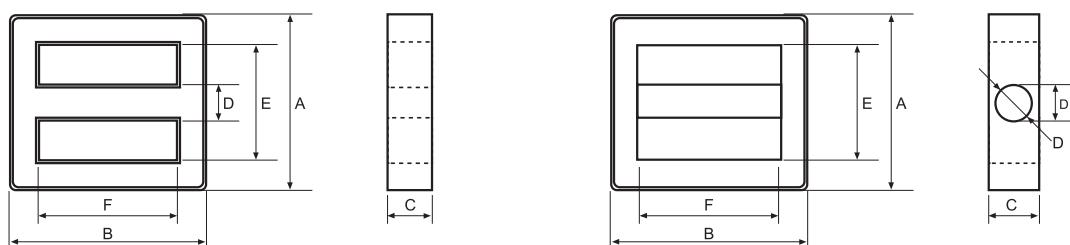

## ■ DIMENSIONS

CORES	DIMENSIONS (mm)							Type
	A	B	C	D	D1	E	F	
<b>ET19.25</b>	$19.25 \pm 0.40$	$20.85 \pm 0.40$	$8.05 \pm 0.20$	$5.25 \pm 0.20$	$4.75 \pm 0.20$	14.80min	16.40min	2
<b>ET20</b>	$20.10 \pm 0.40$	$20.10 \pm 0.40$	$4.40 \pm 0.20$	$4.00 \pm 0.20$	—	15.70min	15.70min	1
<b>ET20A</b>	$20.30 \pm 0.50$	$20.30 \pm 0.50$	$4.40 \pm 0.20$	$4.00 \pm 0.20$	—	16.10min	15.80min	1
<b>ET24</b>	$24.20 \pm 0.50$	$24.20 \pm 0.50$	$4.00 \pm 0.30$	$4.00 \pm 0.20$	—	19.00min	19.00min	1
<b>ET28</b>	$28.40 \pm 0.50$	$28.40 \pm 0.50$	$5.00 \pm 0.30$	$5.00 \pm 0.30$	—	22.20min	22.20min	1

#### ■ DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>ET19.25</b>	1.47	50.42	34.29	1729.17	7.43
<b>ET20</b>	2.96	52.10	17.60	917.00	3.88
<b>ET20A</b>	2.72	50.36	18.51	932.00	4.41
<b>ET24</b>	3.31	60.00	18.00	1098.00	5.15
<b>ET28</b>	2.54	70.00	27.00	1972.00	9.71

## ■ ELECTRICAL CHARACTERISTICS

CORES	<b>AL ± 25% (nH/N<sup>2</sup>)</b>	<b>AL ± 30% (nH/N<sup>2</sup>)</b>		
	<b>A07</b>	<b>A10</b>	<b>A121</b>	<b>A151</b>
<b>ET19.25</b>			10000	
<b>ET20</b>	3100	4400	4850	6370
<b>ET20A</b>		4800		
<b>ET24</b>	2800	3800	4300	5600
<b>ET28</b>	3100 - 4500	4000min	5800	7200

**Remark:**


1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.  
2. Customized dimensions are available.

## Type : UT Cores


Ordering Code: A10      UT8  
 Material      Core Size  
 材質      品名

Shape:

Type:1

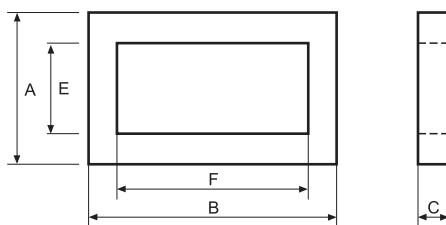

Type:2

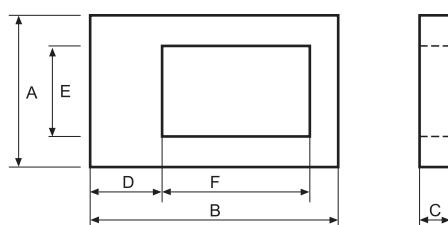

### DIMENSIONS

CORES	DIMENSIONS (mm)						Type
	A	B	C	D	E	F	
UT8	8.00 ± 0.10	16.00 ± 0.25	2.00 ± 0.10	—	4.00 ± 0.10	12.00min	1
UT9.8B	9.80 ± 0.20	9.70 ± 0.20	2.70 ± 0.20	4.40 ± 0.20	4.50 ± 0.20	—	1
UT20	20.60 ± 0.30	14.10 ± 0.25	4.60 ± 0.20	4.10 ± 0.20	15.70min	7.35min	1
UT25	25.60 ± 0.40	17.60 ± 0.30	5.20 ± 0.25	5.20 ± 0.25	19.30min	8.70min	2
UT30	30.00 ± 0.40	19.80 ± 0.30	6.40 ± 0.25	6.40 ± 0.15	22.40min	8.90min	2

### EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
UT8	3.79	38.28	4.00	153.12	0.76
UT9.8B	3.65	26.12	7.15	186.76	0.97
UT20	4.11	53.00	13.00	688.00	3.76
UT25	3.77	68.00	18.00	1203.00	5.85
UT30	2.85	77.00	27.00	2068.00	11.05

### ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )				AL ± 30% (nH/N <sup>2</sup> )		
	P4	P41	P47	A07	A10	A121	A151
UT8					1300	1560	
UT9.8B			1100				
UT20				2140	3000	3700	4625
UT25				2350 +40% -20%	3350		5000
UT30				3150 +40% -20%	4500	5400	

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Customized dimensions are available.


## Type : URT Cores (1)

Ordering Code:	A10	URT15.2	C
	Material 材質	Core Size 品名	Coating 塗裝


C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free

### Shape:


Type:1

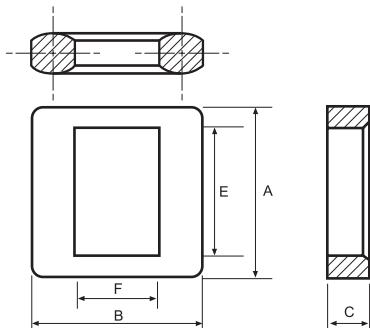

Type:2

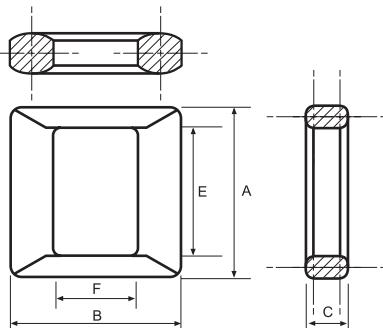

Type:3

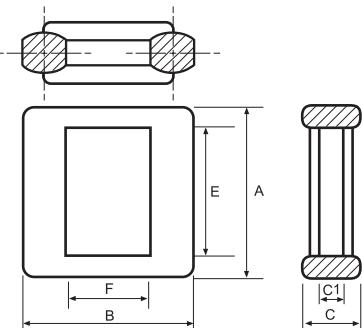

## DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)						Type
	COATING DIMENSIONS (mm)						
URT12	14.10 ± 0.30	12.00 ± 0.30	4.10 ± 0.20	—	10.55 ± 0.30	4.40 ± 0.30	1
	15.00max	12.90max	4.90max	—	9.65min	3.50min	
URT12.5	12.50 ± 0.30	12.00 ± 0.30	4.60 ± 0.25	—	8.80 ± 0.30	5.00 ± 0.30	1
	13.40max	12.90max	5.45max	—	7.90min	4.10min	
URT12.5A	12.90 ± 0.40	12.50 ± 0.40	4.80 ± 0.30	—	8.50min	4.50min	2
	14.00max	13.50max	5.40max	—	7.60min	3.50min	
URT13.4	13.40 ± 0.30	12.90 ± 0.30	7.20 ± 0.30	5.20 ± 0.30	8.40 ± 0.30	4.90 ± 0.30	3
	14.20max	13.50max	8.03max	5.80min	7.80min	4.30min	
URT13.6	13.60 ± 0.40	12.70 ± 0.40	6.80 ± 0.30	4.90 ± 0.25	8.50 ± 0.30	4.70 ± 0.30	3
	14.40max	13.50max	7.50max	5.60max	7.90min	4.10min	
URT14	14.00 ± 0.25	14.60 ± 0.25	5.70 ± 0.20	—	9.60 ± 0.20	5.10 ± 0.25	1
	14.30 ± 0.30	14.90 ± 0.30	6.00 ± 0.25	—	9.30+0.40/-0.20	4.80 ± 0.30	
URT14.5	14.50 ± 0.40	14.50 ± 0.40	5.00 ± 0.30	—	10.50 ± 0.40	5.34 ± 0.40	1
	15.50max	15.50max	5.90max	—	9.50min	4.34min	
URT14.8	14.80 ± 0.30	13.50 ± 0.30	5.00 ± 0.30	—	11.20 ± 0.20	4.60 ± 0.20	1
	16.00max	14.70max	6.40max	—	10.10min	3.40min	
URT15	14.80 ± 0.30	15.10 ± 0.30	5.00 ± 0.30	—	11.20 ± 0.20	6.20 ± 0.30	1
	16.00max	16.30max	6.40max	—	10.10min	5.10min	
URT15A	15.00 ± 0.30	15.10 ± 0.30	4.90 ± 0.20	—	11.20 ± 0.20	6.20 ± 0.30	1
	15.70max	16.00max	5.50max	—	10.60min	5.50min	
URT15.2	15.20 ± 0.40	15.20 ± 0.40	5.10 ± 0.30	—	11.00 ± 0.40	5.90 ± 0.40	2
	16.20max	16.20max	6.00max	—	10.00min	4.90min	
URT18.3	21.10 ± 0.40	18.30 ± 0.35	5.80 ± 0.30	—	14.70 ± 0.35	8.20 ± 0.35	2
	21.90max	19.30max	5.90max	—	13.75min	7.25min	

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
URT12	0.25	37.30	9.30	346.89	2.38
URT12.5	4.04	35.80	8.84	316.40	2.31
URT12.5A	3.46	36.07	10.42	375.80	2.67
URT13.4	2.62	35.30	13.48	476.20	3.46
URT13.6	2.81	35.85	12.75	457.16	3.32
URT14	2.07	36.54	17.67	645.85	3.72
URT14.5	2.90	39.36	13.58	534.30	3.33
URT14.8	3.06	37.68	12.32	464.20	3.40
URT15	3.27	40.48	12.39	501.60	3.55
URT15A	3.27	40.48	12.39	501.60	3.55
URT15.2	3.04	41.11	13.51	555.40	3.60
URT18.3	3.10	58.59	18.87	1105.81	6.40

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )			AL ± 30% (nH/N <sup>2</sup> )				
	P4	P5	A07	A10	A102	A121	A13	A151
URT12					3640			
URT12.5						3700		
URT12.5A							5500	
URT13.4						5500min		
URT13.6							7700min	
URT14						6000		
URT14.5						4800		
URT14.8					4500			
URT15					4000			
URT15A				3810				
URT15.2				4130		4957		
URT18.3							6100min	

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Customized dimensions are available.


## Type : URT Cores (2)

Ordering Code:	A10	URT21A	C
	Material 材質	Core Size 品名	Coating 塗裝


C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free

### Shape:


Type:1

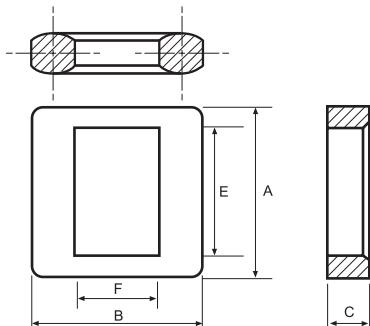

Type:2

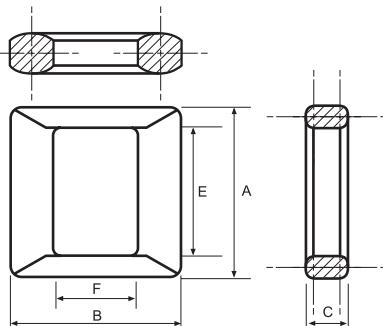

Type:3

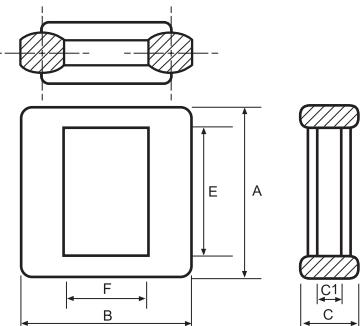

## DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)						Type	
	COATING DIMENSIONS (mm)							
	A	B	C	C1	E	F		
URT19	19.00 ± 0.40	18.30 ± 0.40	5.50 ± 0.20	—	14.00 ± 0.30	8.20 ± 0.30	1	
	20.40max	19.30max	6.30max	—	13.10min	7.30min		
URT20	20.00 ± 0.30	18.00 ± 0.30	5.85 ± 0.20	—	14.90 ± 0.30	8.10 ± 0.20	2	
	20.90max	18.90max	6.65max	—	14.10min	7.35min		
URT21A	21.00 ± 0.40	18.10 ± 0.40	5.80 ± 0.30	—	14.80 ± 0.40	8.30 ± 0.40	2	
	22.00max	19.50max	7.10max	—	13.40min	7.30min		
URT24	24.00 ± 0.20	17.50 ± 0.20	6.00 ± 0.20	—	20.00 ± 0.20	6.50 ± 0.20	1	
	24.80max	18.30max	6.80max	—	19.20min	5.70min		
URT25A	32.50 ± 0.55	25.00 ± 0.45	9.00 ± 0.35	—	21.00 ± 0.40	9.60 ± 0.35	2	
	34.05max	26.45max	10.40max	—	19.60min	8.65min		
URT25.7	28.00 ± 0.50	25.70 ± 0.45	9.40 ± 0.35	—	19.00 ± 0.40	9.80 ± 0.35	2	
	29.10max	26.75max	10.35max	—	18.00min	8.85min		
URT27	26.60 ± 0.50	23.75 ± 0.40	8.00 ± 0.20	—	20.00 ± 0.40	8.75 ± 0.20	1	
	27.70max	24.75max	8.80max	—	19.00min	7.95min		
URT28	28.00 ± 0.40	20.00 ± 0.30	6.50 ± 0.20	—	22.10 ± 0.35	8.00 ± 0.20	1	
	29.00max	20.90max	7.30max	—	21.15min	7.20min		
URT28A	28.00 ± 0.30	20.00 ± 0.25	7.50 ± 0.15	—	19.40 ± 0.25	8.00 ± 0.25	1	
	28.90max	20.85max	8.25max	—	18.55min	7.25min		
URT31.5	31.50 ± 0.40	26.50 ± 0.40	9.00 ± 0.30	—	24.50 ± 0.40	10.50 ± 0.30	1	
	32.50max	27.50max	9.90max	—	23.50min	9.60min		
URT43	43.00 ± 0.80	19.20 ± 0.40	6.80 ± 0.20	—	33.00 ± 0.60	7.00 ± 0.40	1	
	44.40max	20.20max	7.60max	—	31.80min	6.00min		

## ■ EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
URT19	3.04	53.75	17.67	949.76	5.40
URT20	3.37	57.00	16.90	963.00	3.20
URT21A	3.23	58.67	18.16	1065.23	5.60
URT24	3.12	56.90	18.22	1036.72	7.51
URT25A	1.74	82.14	47.26	3881.58	26.80
URT25.7	1.68	76.70	45.47	3487.20	21.53
URT27	1.94	69.86	36.10	2522.02	15.63
URT28	2.75	71.13	25.83	1836.97	10.39
URT28A	1.88	72.12	38.33	2764.36	13.80
URT31.5	2.29	88.10	38.50	3365.00	21.78
URT43	2.76	98.48	35.73	3518.69	16.65

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )			AL ± 30% (nH/N <sup>2</sup> )				
	P4	P5	A07	A10	A102	A121	A13	A151
URT19				4132		4960		
URT20						5000min		
URT21A				5000min				
URT24				4025		4830		
URT25A				4300min				
URT25.7				2600min				
URT27				6496				
URT28				4564				
URT28A			4600					
URT31.5						8000		
URT43				4560		5473		

Remark:


1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Customized dimensions are available.

## Type : T Cores

Ordering Code:

A10	T2.5*1.5*1.3	HP	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

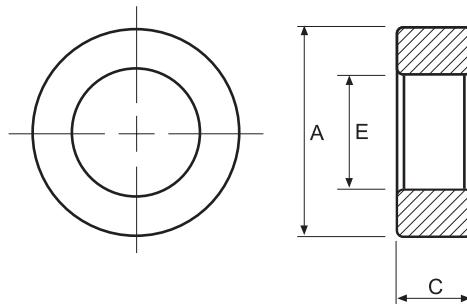

C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free      W : Powder Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	PARYLENE COATING DIMENSIONS (mm)			C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>T2.03x1x1.4</b>	2.03 ± 0.15	1.00 ± 0.15	1.40 ± 0.15	6.34	4.38	0.69	3.03	0.015
	2.03 ± 0.15	1.00 ± 0.15	1.40 ± 0.15					
<b>T2.05x0.75x1.05</b>	2.05 ± 0.15	0.75 ± 0.15	1.05 ± 0.15	5.95	3.74	0.63	2.36	0.010
	2.05 ± 0.15	0.75 ± 0.15	1.05 ± 0.15					
<b>T2.5x1.5x1.3</b>	2.50 ± 0.15	1.50 ± 0.15	1.30 ± 0.15	9.46	6.02	0.64	3.83	0.020
	2.50 ± 0.15	1.50 ± 0.15	1.30 ± 0.15					
<b>T2.54x1.27x1.27</b>	2.54 ± 0.15	1.27 ± 0.15	1.27 ± 0.15	7.14	5.53	0.77	4.29	0.022
	2.54 ± 0.15	1.27 ± 0.15	1.27 ± 0.15					
<b>T2.57x1.5x1.3</b>	2.57 ± 0.15	1.50 ± 0.15	1.30 ± 0.15	8.98	6.09	0.68	4.14	0.021
	2.57 ± 0.15	1.50 ± 0.15	1.30 ± 0.15					
<b>T2.69x1.98x1</b>	2.69 ± 0.15	1.98 ± 0.15	1.00 ± 0.15	20.63	7.22	0.35	2.53	0.010
	2.69 ± 0.15	1.98 ± 0.15	1.00 ± 0.15					
<b>T2.83x1.3x1.9</b>	2.83 ± 0.13	1.30 ± 0.13	1.90 ± 0.13	4.25	5.88	1.38	8.12	0.044
	2.83 ± 0.13	1.30 ± 0.13	1.90 ± 0.13					
<b>T2.9x1.5x1.7</b>	2.90 ± 0.15	1.50 ± 0.15	1.70 ± 0.15	5.61	6.44	1.15	7.39	0.039
	2.90 ± 0.15	1.50 ± 0.15	1.70 ± 0.15					
<b>T2.93x1.63x2.42</b>	2.93 ± 0.15	1.63 ± 0.15	2.42 ± 0.15	4.43	6.77	1.53	10.35	0.049
	2.93 ± 0.15	1.63 ± 0.15	2.42 ± 0.15					
<b>T2.97x2.06x1.17</b>	2.97 ± 0.15	2.06 ± 0.15	1.17 ± 0.15	15.28	7.79	0.51	3.97	0.020
	2.97 ± 0.15	2.06 ± 0.15	1.17 ± 0.15					
<b>T3.05x1.27x2</b>	3.05 ± 0.15	1.27 ± 0.15	2.00 ± 0.15	3.59	5.99	1.67	10.00	0.055
	3.05 ± 0.15	1.27 ± 0.15	2.00 ± 0.15					
<b>T3.05x1.5x2.06</b>	3.05 ± 0.15	1.50 ± 0.15	2.06 ± 0.15	4.30	6.58	1.53	10.08	0.053
	3.05 ± 0.15	1.50 ± 0.15	2.06 ± 0.15					
<b>T3.05x1.68x2.06</b>	3.05 ± 0.15	1.68 ± 0.15	2.06 ± 0.15	5.11	7.01	1.37	9.60	0.048
	3.05 ± 0.15	1.68 ± 0.15	2.06 ± 0.15					
<b>T3.05x1.78x2.07</b>	3.05 ± 0.15	1.78 ± 0.15	2.07 ± 0.15	5.64	7.23	1.28	9.28	0.048
	3.05 ± 0.15	1.78 ± 0.15	2.07 ± 0.15					
<b>T3.25x1.4x0.78</b>	3.25 ± 0.15	1.40 ± 0.15	0.78 ± 0.15	9.56	6.51	0.68	4.43	0.025
	3.25 ± 0.15	1.40 ± 0.15	0.78 ± 0.15					
<b>T3.3x1.78x1.27</b>	3.30 ± 0.15	1.78 ± 0.15	1.27 ± 0.15	8.01	7.49	0.94	7.01	0.037
	3.30 ± 0.15	1.78 ± 0.15	1.27 ± 0.15					
<b>T3.3x2x2.2</b>	3.30 ± 0.15	2.00 ± 0.15	2.20 ± 0.15	5.70	7.99	1.40	11.19	0.056
	3.30 ± 0.15	2.00 ± 0.15	2.20 ± 0.15					
<b>T3.43x1.27x1.27</b>	3.43 ± 0.15	1.27 ± 0.15	1.27 ± 0.15	4.98	6.29	1.26	7.96	0.048
	3.43 ± 0.15	1.27 ± 0.15	1.27 ± 0.15					
<b>T3.43x1.78x1.78</b>	3.43 ± 0.15	1.78 ± 0.15	1.78 ± 0.15	5.38	7.63	1.42	10.80	0.054
	3.43 ± 0.15	1.78 ± 0.15	1.78 ± 0.15					
<b>T3.45x1.75x1.3</b>	3.45 ± 0.15	1.75 ± 0.15	1.30 ± 0.15	7.12	7.57	1.06	8.05	0.042
	3.45 ± 0.15	1.75 ± 0.15	1.30 ± 0.15					
<b>T3.45x1.78x2.2</b>	3.45 ± 0.15	1.78 ± 0.15	2.20 ± 0.15	4.32	7.64	1.77	13.54	0.072
	3.45 ± 0.15	1.78 ± 0.15	2.20 ± 0.15					
<b>T3.5x1.5x1.78</b>	3.50 ± 0.15	1.50 ± 0.15	1.78 ± 0.15	4.17	6.99	1.68	11.72	0.068
	3.50 ± 0.15	1.50 ± 0.15	1.78 ± 0.15					
<b>T3.5x1.78x1.78</b>	3.50 ± 0.15	1.78 ± 0.15	1.78 ± 0.15	5.22	7.69	1.47	11.34	0.064
	3.50 ± 0.15	1.78 ± 0.15	1.78 ± 0.15					
<b>T3.5x1.8x1.8</b>	3.50 ± 0.15	1.80 ± 0.15	1.80 ± 0.15	5.25	7.74	1.47	11.42	0.050
	3.50 ± 0.15	1.80 ± 0.15	1.80 ± 0.15					



## MANUFACTURING CAPABILITY

Gapped Toroid Sizes(OD)	2.50mm - 12.00mm
Height	0.70mm - 8.00mm
Gap Sizes :	0.03mm - 0.80mm
AL Tolerance	AL ± 10%

## APPLICATIONS

<b>Power</b>	DC-DC Converters Compact Power Transformer Small, Low Profile Power Inductors
<b>Telecom</b>	xDSL pass-band Filters Splitters EMI Inductors Filter Inductors with Tight Tolerance

## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )						AL ± 30% (nH/N <sup>2</sup> )				
	P4	P47	P5	A043	A05	A07	A10	A102	A121	A13	A151
T2.03x1x1.4	470				950	1330	1900	2285	2285		2850
T2.05x0.75x1.05		635									
T2.5x1.5x1.3	330	390	260		650		1300	1300	1560		1950
T2.54x1.27x1.27	440			760	880	1230	1760	1760	1930		2540
T2.57x1.5x1.3							1370	1370			
T2.69x1.98x1											
T2.83x1.3x1.9	700										
T2.9x1.5x1.7				970							
T2.93x1.63x2.42	650		550	1240	1350	1900	2700	2700	3300		
T2.97x2.06x1.17											
T3.05x1.27x2	800		650		1600	2300	3250	3250	3900		
T3.05x1.5x2.06	700	840	560	1260	1400	1965	2810	2810	3370		4210
T3.05x1.68x2.06	600	730		1070	1190	1720	2450		2950		3580
T3.05x1.78x2.07	500	670	400	980	1050	1500	2150	2150	2600		3340
T3.25x1.4x0.78				560							
T3.3x1.78x1.27				680							
T3.3x2x2.2				970	1080						
T3.43x1.27x1.27				1050							
T3.43x1.78x1.78	560			1015		1580					
T3.45x1.75x1.3	425	530	340	775	850	1190	1700	1700	2040		2550
T3.45x1.78x2.2				1265	1450	2000	2900				
T3.5x1.5x1.78					1450						
T3.5x1.78x1.78							2320	2320			
T3.5x1.8x1.8	580				1150	1600	2300	2300	2700		3465

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.

2. Coating Material

(1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.

(2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.


3. Customized dimensions are available.

## Type : T Cores

Ordering Code:

A10	T3.68*1.65*2.54	HP	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

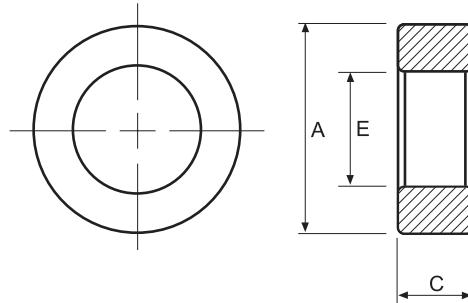

C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free      W : Powder Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	PARYLENE COATING DIMENSIONS (mm)			C <sub>t</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>T3.68x1.65x2.54</b>	3.68 ± 0.15	1.65 ± 0.15	2.54 ± 0.15	3.08	7.54	2.44	18.42	0.101
	3.68 ± 0.15	1.65 ± 0.15	2.54 ± 0.15					
<b>T3.94x1.68x0.76</b>	3.94 ± 0.15	1.68 ± 0.15	0.76 ± 0.15	9.70	7.84	0.81	6.34	0.033
	3.94 ± 0.15	1.68 ± 0.15	0.76 ± 0.15					
<b>T3.94x1.78x1.27</b>	3.94 ± 0.15	1.78 ± 0.15	1.27 ± 0.15	6.23	8.10	1.30	10.53	0.056
	3.94 ± 0.15	1.78 ± 0.15	1.27 ± 0.15					
<b>T3.94x2.24x1.27</b>	3.94 ± 0.15	2.24 ± 0.15	1.27 ± 0.15	8.76	9.21	1.05	9.68	0.050
	3.94 ± 0.15	2.24 ± 0.15	1.27 ± 0.15					
<b>T3.94x2.24x2.54</b>	3.94 ± 0.15	2.24 ± 0.15	2.54 ± 0.15	4.38	9.21	2.10	19.36	0.090
	3.94 ± 0.15	2.24 ± 0.15	2.54 ± 0.15					
<b>T3.95x2.5x2.5</b>	3.95 ± 0.20	2.50 ± 0.20	2.50 ± 0.20	5.49	9.79	1.78	17.43	0.080
	3.95 ± 0.20	2.50 ± 0.20	2.50 ± 0.20					
<b>T4x2x2</b>	4.00 ± 0.20	2.00 ± 0.20	2.00 ± 0.20	4.53	8.71	1.92	16.74	0.099
	4.00 ± 0.20	2.00 ± 0.20	2.00 ± 0.20					
<b>T4x2x2.54</b>	4.00 ± 0.20	2.00 ± 0.20	2.54 ± 0.20	3.57	8.71	2.44	21.26	0.130
	4.00 ± 0.20	2.00 ± 0.20	2.54 ± 0.20					
<b>T4x2.2x1.6</b>	4.00 ± 0.20	2.20 ± 0.20	1.60 ± 0.20	6.57	9.18	1.40	12.84	0.069
	4.00 ± 0.20	2.20 ± 0.20	1.60 ± 0.20					
<b>T4x2.3x2</b>	4.00 ± 0.15	2.30 ± 0.15	2.00 ± 0.15	5.68	9.41	1.66	15.59	0.084
	4.00 ± 0.15	2.30 ± 0.15	2.00 ± 0.15					
<b>T4x2.4x1.6</b>	4.00 ± 0.20	2.40 ± 0.15	1.60 ± 0.15	7.69	9.63	1.25	12.06	0.063
	4.00 ± 0.20	2.40 ± 0.15	1.60 ± 0.15					
<b>T4.2x1.5x2</b>	4.20 ± 0.20	1.50 ± 0.20	2.00 ± 0.20	3.06	7.55	2.47	18.67	0.120
	4.20 ± 0.20	1.50 ± 0.20	2.00 ± 0.20					
<b>T4.3x1.27x0.76</b>	4.30 ± 0.15	1.27 ± 0.15	0.76 ± 0.15	6.78	6.91	1.02	7.03	0.048
	4.30 ± 0.15	1.27 ± 0.15	0.76 ± 0.15					
<b>T4.3x2.1x1.75</b>	4.30 ± 0.20	2.10 ± 0.20	1.75 ± 0.20	5.01	9.24	1.84	17.05	0.090
	4.30 ± 0.20	2.10 ± 0.20	1.75 ± 0.20					
<b>T4.3x2.8x2.5</b>	4.30 ± 0.20	2.80 ± 0.30	2.50 ± 0.20	5.86	10.82	1.85	19.98	0.106
	4.30 ± 0.20	2.80 ± 0.30	2.50 ± 0.20					
<b>T4.4x1.78x0.76</b>	4.40 ± 0.20	1.78 ± 0.20	0.76 ± 0.20	9.14	8.50	0.93	7.91	0.045
	4.40 ± 0.20	1.78 ± 0.20	0.76 ± 0.20					
<b>T4.5x2x3.3</b>	4.50 ± 0.15	2.00 ± 0.15	3.30 ± 0.15	2.35	9.17	3.91	35.83	0.204
	4.50 ± 0.15	2.00 ± 0.15	3.30 ± 0.15					
<b>T4.5x2.7x1.3</b>	4.50 ± 0.20	2.70 ± 0.20	1.30 ± 0.20	9.46	10.83	1.14	12.40	0.065
	4.50 ± 0.20	2.70 ± 0.20	1.30 ± 0.20					
<b>T4.83x2.29x2.54</b>	4.83 ± 0.12	2.29 ± 0.15	2.54 ± 0.12	3.31	10.21	3.08	31.45	0.180
	4.83 ± 0.12	2.29 ± 0.15	2.54 ± 0.12					
<b>T4.95x1.55x2.84</b>	4.95 ± 0.20	1.55 ± 0.20	2.84 ± 0.20	1.91	8.23	4.32	35.56	0.230
	4.95 ± 0.20	1.55 ± 0.20	2.84 ± 0.20					
<b>T5x3x3.1</b>	5.00 ± 0.15	3.00 ± 0.15	3.10 ± 0.15	3.97	12.04	3.03	36.51	0.090
	5.00 ± 0.15	3.00 ± 0.15	3.10 ± 0.15					
<b>T5.05x1.78x0.85</b>	5.05 ± 0.20	1.78 ± 0.20	0.85 ± 0.20	7.09	9.01	1.27	11.44	0.069
	5.05 ± 0.20	1.78 ± 0.20	0.85 ± 0.20					
<b>T5.05x2.42x1</b>	5.05 ± 0.20	2.42 ± 0.18	1.00 ± 0.18	8.54	10.74	1.26	13.50	0.072
	5.05 ± 0.20	2.42 ± 0.18	1.00 ± 0.18					
<b>T5.08x1.3x3.23</b>	5.08 ± 0.15	1.30 ± 0.15	3.23 ± 0.15	1.43	7.48	5.24	39.21	0.297
	5.08 ± 0.15	1.30 ± 0.15	3.23 ± 0.15					

## MANUFACTURING CAPABILITY

Gapped Toroid Sizes(OD)	2.50mm - 12.00mm
Height	0.70mm - 8.00mm
Gap Sizes :	0.03mm - 0.80mm
AL Tolerance	AL ± 10%

## APPLICATIONS

<b>Power</b>	DC-DC Converters Compact Power Transformer Small, Low Profile Power Inductors
<b>Telecom</b>	xDSL pass-band Filters Splitters EMI Inductors Filter Inductors with Tight Tolerance

## ELECTRICAL CHARACTERISTICS

<b>CORES</b>	<b>AL ± 25% (nH/N<sup>2</sup>)</b>						<b>AL ± 30% (nH/N<sup>2</sup>)</b>				
	<b>P4</b>	<b>P47</b>	<b>P5</b>	<b>A043</b>	<b>A05</b>	<b>A07</b>	<b>A10</b>	<b>A102</b>	<b>A121</b>	<b>A13</b>	<b>A151</b>
<b>T3.68x1.65x2.54</b>				1740	1935						
<b>T3.94x1.68x0.76</b>	300	360		550	600	830	1200	1200	1400		1830
<b>T3.94x1.78x1.27</b>					960	1340	1900	2300	2300		2870
<b>T3.94x2.24x1.27</b>	350	420			690	980	1400	1400	1670		2100
<b>T3.94x2.24x2.54</b>	740		560	1260	1475	2065	2950	2950	3350		4195
<b>T3.95x2.5x2.5</b>											3120
<b>T4x2x2</b>	640	800	530	1200	1400	2000	2500	2500	3200		4000
<b>T4x2x2.54</b>	880	1050		1530	1760	2460	3520	3520	3050min		5080
<b>T4x2.2x1.6</b>	460	550	380		930	1340	1850	1850	2300		2790
<b>T4x2.3x2</b>											3325
<b>T4x2.4x1.6</b>	400	490	320	720	800	1120	1600	1600	1920		2400
<b>T4.2x1.5x2</b>		1235									
<b>T4.3x1.27x0.76</b>					825						
<b>T4.3x2.1x1.75</b>	600	720	450		1200	1650	2400	2400	2850		
<b>T4.3x2.8x2.5</b>	530	640	420		1050	1480	2100	2100	2550		3170
<b>T4.4x1.78x0.76</b>	300		250		600	900	1250	1250	1500		
<b>T4.5x2x3.3</b>				2280							
<b>T4.5x2.7x1.3</b>	325	390	260	550	650	910	1300	1300			
<b>T4.83x2.29x2.54</b>	950	1090	720		1900	2660	3800	3800	4350		
<b>T4.95x1.55x2.84</b>						4100	5900	5900			
<b>T5x3x3.1</b>	770	930	620	1425	1550	2170	3000		3700		4600
<b>T5.05x1.78x0.85</b>	400		300		800	1100	1600	1600	1900		2440
<b>T5.05x2.42x1</b>	350	440	280		735	1000	1410	1410			
<b>T5.08x1.3x3.23</b>	1910										

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.

2. Coating Material

(1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.

(2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.


3. Customized dimensions are available.

## Type : T Cores

Ordering Code:

P4	T5.84*3.05*1.52	HP	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

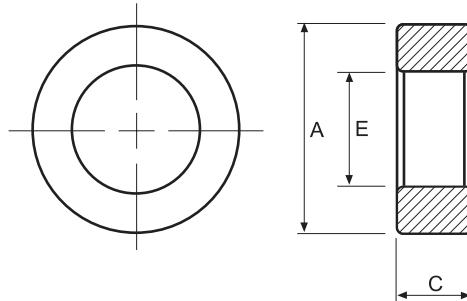

C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free      W : Powder Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	PARYLENE COATING DIMENSIONS (mm)			C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>T5.33x3.12x1.98</b>	5.33 ± 0.20	3.12 ± 0.20	1.98 ± 0.20	5.93	12.66	2.14	27.04	0.12
	5.33 ± 0.20	3.12 ± 0.20	1.98 ± 0.20					
<b>T5.4x2.6x2</b>	5.40 ± 0.20	2.60 ± 0.20	2.00 ± 0.20	4.30	11.51	2.68	30.84	0.17
	5.40 ± 0.20	2.60 ± 0.20	2.00 ± 0.20					
<b>T5.4x3.15x1.96</b>	5.40 ± 0.15	3.15 ± 0.15	1.96 ± 0.15	5.95	12.80	2.15	27.55	0.14
	5.40 ± 0.15	3.15 ± 0.15	1.96 ± 0.15					
<b>T5.84x3.05x1.52</b>	5.84 ± 0.15	3.05 ± 0.15	1.52 ± 0.15	6.36	13.03	2.05	26.67	0.14
	5.84 ± 0.15	3.05 ± 0.15	1.52 ± 0.15					
<b>T5.9x2.8x1.6</b>	5.90 ± 0.30	2.80 ± 0.30	1.60 ± 0.20	5.27	12.48	2.37	29.55	0.16
	5.90 ± 0.30	2.80 ± 0.30	1.60 ± 0.20					
<b>T5.95x2.8x2.5</b>	5.95 ± 0.30	2.80 ± 0.30	2.50 ± 0.20	3.33	12.52	3.76	47.04	0.26
	5.95 ± 0.30	2.80 ± 0.30	2.50 ± 0.20					
<b>T6x2x2.5</b>	6.00 ± 0.30	2.00 ± 0.30	2.50 ± 0.20	2.29	10.35	4.53	46.86	0.31
	6.00 ± 0.30	2.00 ± 0.30	2.50 ± 0.20					
<b>T6x3x3</b>	6.00 ± 0.30	3.00 ± 0.30	3.00 ± 0.20	3.02	13.07	4.32	56.50	0.32
	6.00 ± 0.30	3.00 ± 0.30	3.00 ± 0.20					
<b>T6x4x2.15</b>	6.00 ± 0.30	4.00 ± 0.30	2.15 ± 0.20	7.21	15.29	2.12	32.42	0.17
	6.00 ± 0.30	4.00 ± 0.30	2.15 ± 0.20					
<b>T6.22x2.8x3.38</b>	6.22 ± 0.30	2.80 ± 0.30	3.38 ± 0.20	2.33	12.77	5.48	70.01	0.40
	6.22 ± 0.30	2.80 ± 0.30	3.38 ± 0.20					
<b>T6.35x3.81x3.18</b>	6.35 ± 0.30	3.81 ± 0.30	3.18 ± 0.20	3.87	15.29	3.95	60.41	0.30
	6.35 ± 0.30	3.81 ± 0.30	3.18 ± 0.20					
<b>T6.5x3.5x2.3</b>	6.50 ± 0.30	3.50 ± 0.25	2.30 ± 0.20	4.41	14.75	3.34	49.29	0.27
	6.50 ± 0.30	3.50 ± 0.25	2.30 ± 0.20					
<b>T6.95x4x2</b>	6.95 ± 0.20	4.00 ± 0.15	2.00 ± 0.15	5.69	16.36	2.88	47.04	0.25
	6.95 ± 0.20	4.00 ± 0.15	2.00 ± 0.15					
<b>T7x2.5x2</b>	7.00 ± 0.20	2.50 ± 0.20	2.00 ± 0.20	3.05	12.58	4.12	51.83	0.33
	7.80max	1.70min	2.80max					
<b>T7x4x2</b>	7.00 ± 0.20	4.00 ± 0.15	2.00 ± 0.15	5.61	16.41	2.92	47.96	0.25
	7.00 ± 0.20	4.00 ± 0.15	2.00 ± 0.15					
<b>T7.1x4.4x2.7</b>	7.10 ± 0.30	4.40 ± 0.30	2.70 ± 0.30	4.86	17.39	3.58	62.20	0.31
	7.10 ± 0.30	4.40 ± 0.30	2.70 ± 0.30					
<b>T7.62x3.18x4.8</b>	7.62 ± 0.15	3.18 ± 0.15	4.80 ± 0.15	1.50	14.98	10.00	149.88	0.89
	7.62 ± 0.15	3.18 ± 0.15	4.80 ± 0.15					
<b>T8x4x4</b>	8.00 ± 0.30	4.00 ± 0.20	4.00 ± 0.30	2.27	17.42	7.69	133.92	0.76
	8.00 ± 0.30	4.00 ± 0.20	4.00 ± 0.30					
<b>T8x4.5x4</b>	8.00 ± 0.30	4.50 ± 0.20	4.00 ± 0.30	2.73	18.59	6.81	126.61	0.65
	8.00 ± 0.30	4.50 ± 0.20	4.00 ± 0.30					
<b>T8.15x4.3x4.05</b>	8.15 ± 0.30	4.30 ± 0.30	4.05 ± 0.30	2.43	18.28	7.54	137.79	0.75
	8.15 ± 0.30	4.30 ± 0.30	4.05 ± 0.30					
<b>T8.35x3.33x4.18</b>	8.35 ± 0.30	3.33 ± 0.20	4.18 ± 0.20	1.64	16.00	9.78	156.50	0.93
	8.35 ± 0.30	3.33 ± 0.20	4.18 ± 0.20					
<b>T8.4x4.4x2</b>	8.40 ± 0.20	4.40 ± 0.20	2.00 ± 0.20	5.62	16.41	2.92	47.92	0.42
	9.10max	3.70min	2.60max					
<b>T8.7x5.2x2.3</b>	8.70 ± 0.15	5.20 ± 0.15	2.30 ± 0.15	5.31	20.90	3.94	82.29	0.42
	8.70 ± 0.15	5.20 ± 0.15	2.30 ± 0.15					
<b>T8.89x3.81x4.83</b>	8.89 ± 0.15	3.81 ± 0.15	4.83 ± 0.15	1.54	17.75	11.56	205.16	1.16
	8.89 ± 0.15	3.81 ± 0.15	4.83 ± 0.15					

## MANUFACTURING CAPABILITY

Gapped Toroid Sizes(OD)	2.50mm - 12.00mm
Height	0.70mm - 8.00mm
Gap Sizes :	0.03mm - 0.80mm
AL Tolerance	AL ± 10%

## APPLICATIONS

<b>Power</b>	DC-DC Converters Compact Power Transformer Small, Low Profile Power Inductors
<b>Telecom</b>	xDSL pass-band Filters Splitters EMI Inductors Filter Inductors with Tight Tolerance

## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )						AL ± 30% (nH/N <sup>2</sup> )				
	P4	P47	P5	A043	A05	A07	A10	A102	A121	A13	A151
<b>T5.33x3.12x1.98</b>											3100
<b>T5.4x2.6x2</b>									3360		
<b>T5.4x3.15x1.96</b>	520	630			1050	1470	2100				
<b>T5.84x3.05x1.52</b>	490	570		860	980	1370	1960	1960	2290		2860
<b>T5.9x2.8x1.6</b>		680									
<b>T5.95x2.8x2.5</b>	940	1130			1850	2630	3700		4320		5400
<b>T6x2x2.5</b>	1370	1645			2740	3850	5490		6590		
<b>T6x3x3</b>	1000	1200	800	1800	2200	2800	4000	4000	4800		6000
<b>T6x4x2.15</b>	430	515	340	700	870	1200	1740	1740	2080		2600
<b>T6.22x2.8x3.38</b>	1280	1540			2560		5130	5130			
<b>T6.35x3.81x3.18</b>	790	950	630	1430	1590	2220	3180	3180	3820		4870
<b>T6.5x3.5x2.3</b>	690	830			1380	1930	2840		3400		4140
<b>T6.95x4x2</b>	530	650	430		1070	1500	2150		2580		3230
<b>T7x2.5x2</b>											
<b>T7x4x2</b>	550	650	440		1090	1520	2100	2100	2600		3270
<b>T7.1x4.4x2.7</b>	640	770		1140	1260	1770	2580		3100		3800
<b>T7.62x3.18x4.8</b>	2090	2500		3550	4175	5845	8350	8350	9480		11850
<b>T8x4x4</b>	1300	1660		2400	2650	3700	5300	5300	6400		8000
<b>T8x4.5x4</b>	1100	1320	900		2200	3100	4450	4450	5380		6725
<b>T8.15x4.3x4.05</b>	1300						5010	5010	6015		7520
<b>T8.35x3.33x4.18</b>					3600	5030	7185	7185	8625		10790
<b>T8.4x4.4x2</b>	625										
<b>T8.7x5.2x2.3</b>	600	700			1180	1650	2370				
<b>T8.89x3.81x4.83</b>	1930										11600

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.

2. Coating Material

(1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.

(2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.


3. Customized dimensions are available.

## Type : T Cores

Ordering Code:

A05	T9*5*3	C	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

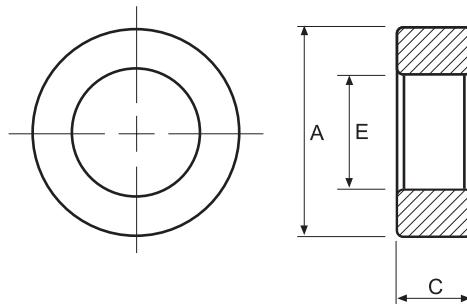

C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free      W : Powder Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	EPOXY COATING DIMENSIONS (mm)			$C_1(\text{mm}^{-1})$	Le(mm)	$A_e(\text{mm}^2)$	$V_e(\text{mm}^3)$	Wt(g/set)
	A	E	C					
T9x5x3	9.10 ± 0.30	5.10 ± 0.30	3.00 ± 0.30	3.56	20.77	5.83	121.12	0.60
	10.00max	4.20min	3.90max					
T9x5x5	9.10 ± 0.30	5.10 ± 0.30	5.00 ± 0.30	2.14	20.77	9.72	201.86	1.00
	10.00max	4.20min	5.90max					
T9x5x5.5	9.10 ± 0.30	5.10 ± 0.30	5.50 ± 0.30	1.94	20.77	10.69	222.05	1.09
	10.00max	4.20min	6.40max					
T9x5x7	9.10 ± 0.30	5.10 ± 0.30	7.00 ± 0.30	1.53	20.77	13.60	282.61	1.41
	10.00max	4.20min	7.90max					
T9x6x3	8.90 ± 0.30	6.00 ± 0.30	3.00 ± 0.30	5.17	22.93	4.44	101.78	0.60
	9.80max	5.10min	3.90max					
T9x6x5	8.90 ± 0.30	6.00 ± 0.30	5.00 ± 0.30	3.10	22.93	7.40	169.63	0.86
	9.80max	5.10min	5.90max					
T9.5x3x1.7	9.50 ± 0.40	3.00 ± 0.30	1.70 ± 0.20	3.21	15.88	4.95	78.62	0.51
	10.50max	2.10min	2.50max					
T9.53x4.75x3.2	9.53 ± 0.25	4.75 ± 0.25	3.20 $\pm 0.13$	2.82	20.72	7.35	152.19	0.80
	10.38max	3.90min	3.93max					
T9.53x4.75x4.8	9.53 ± 0.25	4.75 $\pm 0.13$ -0.12	4.80 $\pm 0.13$ -0.12	1.88	20.72	11.02	228.28	1.09
	10.38max	4.03min	5.53max					
T9.53x4.75x4.9	9.53 ± 0.25	4.75 $\pm 0.13$ -0.12	4.90 $\pm 0.13$ -0.12	1.84	20.72	11.25	233.04	1.26
	10.38max	4.03min	5.63max					
T9.53x4.75x6.35	9.53 ± 0.20	4.75 ± 0.20	6.35 ± 0.18	1.42	20.72	14.58	302.00	1.62
	10.33max	3.95min	7.13max					
T9.53x5.59x3.2	9.53 ± 0.30	5.59 ± 0.25	3.20 $\pm 0.13$ -0.12	3.68	22.66	6.16	139.51	0.75
	10.43max	4.74min	3.93max					
T9.53x5.59x4	9.53 ± 0.30	5.59 ± 0.25	4.00 $\pm 0.13$ -0.12	2.94	22.66	7.70	174.39	0.91
	10.43max	4.74min	4.73max					
T9.53x5.59x4.9	9.53 ± 0.30	5.59 ± 0.25	4.90 $\pm 0.13$ -0.12	2.40	22.66	9.43	213.62	1.14
	10.43max	4.74min	5.63max					
T9.53x5.59x7.11	9.53 ± 0.30	5.59 ± 0.25	7.11 ± 0.25	1.66	22.66	13.68	309.97	1.61
	10.43max	4.74min	8.01max					



## MANUFACTURING CAPABILITY

Gapped Toroid Sizes(OD)	2.50mm - 12.00mm
Height	0.70mm - 8.00mm
Gap Sizes :	0.03mm - 0.80mm
AL Tolerance	AL ± 10%

## APPLICATIONS

<b>Power</b>	DC-DC Converters Compact Power Transformer Small, Low Profile Power Inductors
<b>Telecom</b>	xDSL pass-band Filters Splitters EMI Inductors Filter Inductors with Tight Tolerance

## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )					AL ± 30% (nH/N <sup>2</sup> )				
	P4	P47	P5	A05	A07	A10	A102	A121	A13	A151
T9x5x3	880	1020	680	1760	2470	3520	3520	4060		5070
T9x5x5	1469	1750	1130	2938	4114	5887	5887	6765		8460
T9x5x5.5	1616			3232	4525	6465	6465			
T9x5x7	2057	2450	1600	4114	5760	8229	8229	9600		
T9x6x3	585	730	440	1170	1635	2330	2330	2800		3500
T9x6x5	980	1200		2000	2725	3890	3890			
T9.5x3x1.7						3540	3540			
T9.53x4.75x3.2	1110	1285	855	2230	3120	4450	4450	5140		6430
T9.53x4.75x4.8	1670			3340	4680	6680	6680	7720		9600
T9.53x4.75x4.9	1730			3460	4840	6920	6920	7880		9845
T9.53x4.75x6.35	2190	2550		4380	6140	8770	8770	10210		12760
T9.53x5.59x3.2	850		670	1700	2380	3400	3400			
T9.53x5.59x4	1040	1250	830	2080	2920	4170	4170	5000		6250
T9.53x5.59x4.9	1300	1560	1020	2610	3650	5220	5220	6130		7660
T9.53x5.59x7.11	1900	2270		3790	5310	7590	7590			

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.

2. Coating Material

(1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.

(2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.


3. Customized dimensions are available.

## Type : T Cores

Ordering Code:

A05	T10*5*3	C	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

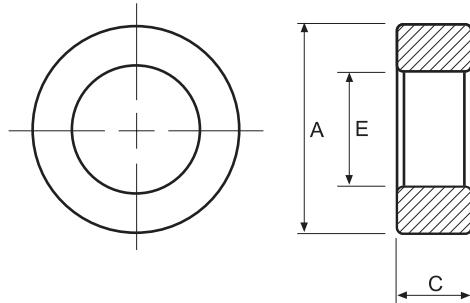

C : Epoxy Coating of Halogen-Free     HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free     W : Powder Coating of Halogen-Free

## DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	EPOXY COATING DIMENSIONS (mm)			C1(mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
	A	E	C					
T10x5x2.3	10.00 ± 0.20	5.00 ± 0.13	2.30 ± 0.13	3.94	21.78	5.53	120.32	0.66
	10.80max	4.27min	3.03max					
T10x5x3	10.00 ± 0.20	5.00 ± 0.13	3.00 ± 0.13	3.02	21.78	7.21	156.93	0.84
	10.80max	4.27min	3.73max					
T10x5x5	10.00 ± 0.20	5.00 ± 0.13	5.00 ± 0.13	1.81	21.78	12.01	261.56	1.41
	10.80max	4.27min	5.73max					
T10x6x2.78	10.10 ± 0.30	6.10 ± 0.30	2.78 ± 0.30	4.42	24.07	5.44	130.97	0.67
	11.00max	5.20min	3.68max					
T10x6x4	10.10 ± 0.30	6.10 ± 0.30	4.00 ± 0.30	3.08	24.07	7.83	188.44	0.98
	11.00max	5.20min	4.90max					
T10x6x5	10.10 ± 0.30	6.10 ± 0.30	5.00 ± 0.30	2.46	24.07	9.79	235.55	1.25
	11.00max	5.20min	5.90max					
T10x6x6	10.10 ± 0.30	6.10 ± 0.30	6.00 ± 0.30	2.05	24.07	11.74	282.66	1.48
	11.00max	5.20min	6.90max					
T10.6x5.2x4.4	10.60 ± 0.30	5.20 ± 0.30	4.40 ± 0.20	2.01	22.84	11.39	260.14	1.41
	11.50max	4.30min	5.20max					
T11.5x7.5x3.6	11.50 ± 0.30	7.50 ± 0.30	3.60 ± 0.30	4.08	28.96	7.09	205.33	1.08
	12.40max	6.60min	4.50max					
T12x6x4	12.00 ± 0.40	6.00 ± 0.30	4.00 ± 0.30	2.27	26.13	11.53	301.31	1.50
	13.00max	5.10min	4.90max					
T12x7.92x4.7	12.00 ± 0.40	7.92 ± 0.30	4.70 ± 0.30	3.22	30.40	9.45	287.28	1.50
	13.00max	7.02min	5.60max					
T12.3x9.4x5	12.30 ± 0.30	9.40 ± 0.30	5.00 ± 0.30	4.67	33.68	7.21	242.71	1.10
	13.20max	8.50min	5.90max					
T12.4x7.8x3.75	12.40 ± 0.40	7.80 ± 0.30	3.75 ± 0.30	3.61	30.62	8.47	259.43	1.34
	13.40max	6.90min	4.65max					
T12.5x7.5x5	12.50 ± 0.30	7.50 ± 0.30	5.00 ± 0.30	2.46	30.09	12.23	368.05	1.93
	13.40max	6.60min	5.90max					
T12.5x7.5x6.45	12.50 ± 0.30	7.50 ± 0.30	6.45 ± 0.30	1.91	30.09	15.78	474.79	2.45
	13.40max	6.60min	7.35max					
T12.7x5.16x6.35	12.70 ± 0.40	5.16 ± 0.30	6.35 ± 0.30	1.10	24.59	22.38	550.49	3.21
	13.70max	4.26min	7.25max					
T12.7x7.14x4.78	12.70 ± 0.40	7.14 ± 0.30	4.78 ± 0.30	2.28	29.51	12.93	381.43	2.00
	13.70max	6.24min	5.68max					
T12.7x7.14x6.35	12.70 ± 0.40	7.14 ± 0.30	6.35 ± 0.30	1.72	29.51	17.17	506.72	2.67
	13.70max	6.24min	7.25max					

## MANUFACTURING CAPABILITY

Gapped Toroid Sizes(OD)	2.50mm - 12.00mm
Height	0.70mm - 8.00mm
Gap Sizes :	0.03mm - 0.80mm
AL Tolerance	AL ± 10%

## APPLICATIONS

<b>Power</b>	DC-DC Converters Compact Power Transformer Small, Low Profile Power Inductors
<b>Telecom</b>	xDSL pass-band Filters Splitters EMI Inductors Filter Inductors with Tight Tolerance

## ELECTRICAL CHARACTERISTICS

<b>CORES</b>	<b>AL ± 25% (nH/N<sup>2</sup>)</b>					<b>AL ± 30% (nH/N<sup>2</sup>)</b>				
	<b>P4</b>	<b>P47</b>	<b>P5</b>	<b>A05</b>	<b>A07</b>	<b>A10</b>	<b>A102</b>	<b>A121</b>	<b>A13</b>	<b>A151</b>
<b>T10x5x2.3</b>	760	920		1530	2147	3070		3680		4600
<b>T10x5x3</b>	1000	1200		2000	2800	4000	4000	4800		6000
<b>T10x5x5</b>	1650	2000	1330	3300	4650	6650	6650	8000		10000
<b>T10x6x2.78</b>	680		550	1350	1900	2740	2740	3300		4120
<b>T10x6x4</b>	1020	1185	800	2040	2850	4080	4080	4900		5930
<b>T10x6x5</b>	1270	1480	990	2550	3570	5100	5100	5820		7410
<b>T10x6x6</b>	1530	1800	1220	3060	4290	6130	6130	7350		8895
<b>T10.6x5.2x4.4</b>	1500	1880	1200	3000	4200	6000	6000			
<b>T11.5x7.5x3.6</b>	758			1510	2120	3030	3030	3635		4545
<b>T12x6x4</b>	1350	1600		2700	3800	5400	5400	6000	6000	8000
<b>T12x7.92x4.7</b>										
<b>T12.3x9.4x5</b>					1800					
<b>T12.4x7.8x3.75</b>				1790		3420	3420			5130
<b>T12.5x7.5x5</b>	1250	1500	1000	2500	3500	5000	5000	6000		7500
<b>T12.5x7.5x6.45</b>				3290	4510					
<b>T12.7x5.16x6.35</b>	2680	3220		5360	7500	10730	10730	13700		17000
<b>T12.7x7.14x4.78</b>	1340	1650		2680	3750	5360	5360	6430		8040
<b>T12.7x7.14x6.35</b>	1780		1420	3560	4985	7120	7120	8550		10685

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.

2. Coating Material

(1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.

(2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.


3. Customized dimensions are available.

## Type : T Cores

Ordering Code:

P4	T12.7*7.92*4.7	C	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

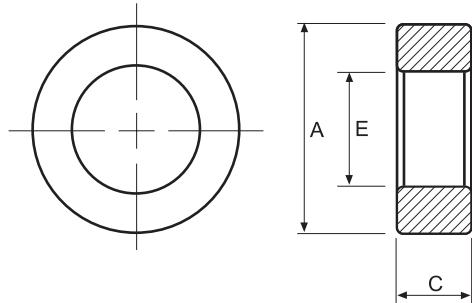

C : Epoxy Coating of Halogen-Free     HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free     W : Powder Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	EPOXY COATING DIMENSIONS (mm)			C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
	A	E	C					
T12.7x7.92x4.7	12.70 ± 0.40	7.92 ± 0.30	4.70 ± 0.30	2.83	31.22	11.03	344.21	1.61
	13.70max	7.02min	5.60max					
T12.7x7.92x4.9	12.70 ± 0.40	7.92 ± 0.30	4.90 ± 0.30	2.72	31.22	11.50	358.86	1.70
	13.70max	7.02min	5.80max					
T12.7x7.92x5.2	12.70 ± 0.40	7.92 ± 0.30	5.20 ± 0.30	2.56	31.22	12.20	380.83	1.80
	13.70max	7.02min	6.10max					
T12.7x7.92x6.35	12.70 ± 0.40	7.92 ± 0.30	6.35 ± 0.30	2.10	31.22	14.90	465.05	2.33
	13.70max	7.02min	7.25max					
T12.7x7.92x7	12.70 ± 0.40	7.92 ± 0.30	7.00 ± 0.30	1.90	31.22	16.42	512.66	2.65
	13.70max	7.02min	7.90max					
T12.7x8.02x6.35	12.70 ± 0.25	8.02 ± 0.25	6.35 ± 0.15	2.15	31.43	14.60	458.86	2.39
	13.50max	7.17min	7.10max					
T12.7x8.12x5.08	12.70 ± 0.40	8.12 ± 0.30	5.08 ± 0.30	2.77	31.64	11.44	361.98	1.82
	13.70max	7.22min	5.98max					
T12.85x7.35x5	12.85 ± 0.40	7.35 ± 0.30	5.00 ± 0.30	2.25	30.14	13.40	403.78	2.14
	13.85max	6.45min	5.90max					
T13.2x7.45x3.2	13.20 ± 0.30	7.45 ± 0.30	3.20 ± 0.20	3.43	30.73	8.95	275.16	1.41
	13.80max	7.00min	3.70max					
T13.21x7.37x3.96	13.21 ± 0.40	7.37 ± 0.30	3.96 ± 0.30	2.72	30.56	11.24	343.54	1.81
	14.21max	6.47min	4.86max					
T13.3x7.1x12.7	13.30 ± 0.30	7.10 ± 0.30	12.70 ± 0.30	0.79	30.03	38.10	1144.33	6.17
	14.20max	6.20min	13.60max					
T13.3x8.3x5	13.30 ± 0.30	8.30 ± 0.30	5.00 ± 0.30	2.67	32.70	12.27	401.31	2.09
	14.20max	7.40min	5.90max					
T13.4x7.3x3.65	13.40 ± 0.60	7.30 ± 0.30	3.65 ± 0.15	2.83	30.60	10.80	330.36	1.80
	14.60max	6.30min	4.40max					
T14x7x7	14.00 ± 0.40	7.00 ± 0.30	7.00 ± 0.30	1.29	30.49	23.54	717.71	3.88
	15.00max	6.10min	7.90max					
T14x7.5x7	14.00 ± 0.40	7.50 ± 0.30	7.00 ± 0.30	1.44	31.68	22.03	697.66	3.69
	15.00max	6.60min	7.90max					
T14x8x4	14.00 ± 0.40	8.00 ± 0.30	4.00 ± 0.30	2.81	32.82	11.69	383.69	1.97
	15.00max	7.10min	4.90max					
T14x8x7	14.00 ± 0.40	8.00 ± 0.30	7.00 ± 0.30	1.60	32.82	20.46	671.46	3.45
	15.00max	7.10min	7.90max					
T14x8x9	14.00 ± 0.40	8.00 ± 0.30	9.00 ± 0.30	1.25	32.82	26.31	863.31	4.48
	15.00max	7.10min	9.90max					
T14x8.4x4	14.00 ± 0.40	8.40 ± 0.30	4.00 ± 0.30	3.08	33.70	10.96	369.35	1.97
	15.00max	7.50min	4.90max					
T14x8.4x12	14.00 ± 0.40	8.40 ± 0.30	12.00 ± 0.30	1.03	33.70	32.88	1108.05	5.63
	15.00max	7.50min	12.90max					

## MANUFACTURING CAPABILITY

Gapped Toroid Sizes(OD)	12.00mm - 38.00mm
Height	3.00mm - 15.00mm
Gap Sizes :	0.45mm - 2.00mm
AL Tolerance	AL ± 10%

## APPLICATIONS

<b>Power</b>	DC-DC Converters Compact Power Transformer Small, Low Profile Power Inductors
<b>Telecom</b>	xDSL pass-band Filters Splitters EMI Inductors Filter Inductors with Tight Tolerance

## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )					AL ± 30% (nH/N <sup>2</sup> )				
	P4	P47	P5	A05	A07	A10	A102	A121	A13	A151
T12.7x7.92x4.7	1100	1300	870	2220	3110	4460	4460	5230		6540
T12.7x7.92x4.9	1156	1390		2310	3240	4630	4630	5456		6940
T12.7x7.92x5.2	1227	1470		2455	3437	4910	4910	5890	5890	7230
T12.7x7.92x6.35	1487	1760	1170	2990	4190	5950	5950	7070		8840
T12.7x7.92x7	1653	1950	1290	3300	4650	6610	6610	7795		9740
T12.7x8.02x6.35						5800				
T12.7x8.12x5.08				2200		4470	4470			
T12.85x7.35x5	1400	1670		2790	3910	5580	5580	6540		8170
T13.2x7.45x3.2	900									
T13.21x7.37x3.96	1120	1350	900	2250	3150	4500	4500	5500	5500	6930
T13.3x7.1x12.7						15440		18530		23000
T13.3x8.3x5	1150	1390	900	2300	3200	4600	4600	5500		6800
T13.4x7.3x3.65				2200						
T14x7x7		2800		4670	6540	9300	9300	11210		14000
T14x7.5x7				4230	5930	8400	8400	10160		12700
T14x8x4	1119	1310	870	2240	3130	4480	4480	5240		6550
T14x8x7	1956	2350	1530	3920	5480	7840	7840	9170		11460
T14x8x9	2510	3000		5040	7045	10080	10080	11790	11790	14730
T14x8.4x4	1020		800	2040	2860	4080	4080	4800		
T14x8.4x12	3060			6130	8580	12260	12260	14400		

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.

2. Coating Material

(1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.

(2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.


3. Customized dimensions are available.

## Type : T Cores

Ordering Code:

A10	T14*9*5	C	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

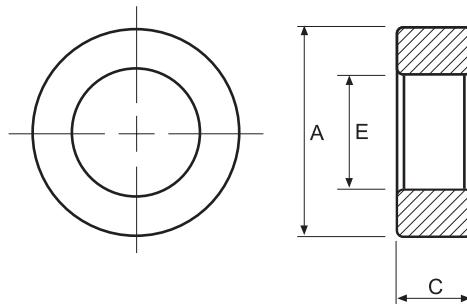

C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free      W : Powder Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	EPOXY COATING DIMENSIONS (mm)			C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
	A	E	C					
T14x9x5	14.00 ± 0.40	9.00 ± 0.30	5.00 ± 0.30	2.84	34.98	12.30	430.19	2.08
	15.00max	8.10min	5.90max					
T14.3x9.7x6.3	14.30 ± 0.30	9.70 ± 0.30	6.30 ± 0.30	2.57	36.77	14.31	526.14	2.81
	15.20max	8.80min	7.20max					
T15.7x10.2x6.8	15.70 ± 0.40	10.20 ± 0.40	6.80 ± 0.30	2.14	39.45	18.41	726.37	3.70
	16.70max	9.20min	7.60max					
T15.88x8.89x4.7	15.88 ± 0.40	8.89 ± 0.30	4.70 ± 0.30	2.30	36.81	15.97	587.97	3.17
	16.88max	7.99min	5.60max					
T16x7x9	16.00 ± 0.30	7.00 ± 0.20	9.00 ± 0.20	0.84	32.32	38.27	1236.87	7.11
	16.90max	6.20min	9.80max					
T16x8x8	16.00 ± 0.30	8.00 ± 0.30	8.00 ± 0.30	1.13	34.84	30.75	1071.34	5.83
	16.90max	7.10min	8.90max					
T16x9x5	16.00 ± 0.40	9.50 ± 0.40	5.00 ± 0.30	2.18	37.18	17.03	633.06	3.19
	17.00max	8.50min	5.90max					
T16x9x8	16.00 ± 0.40	9.50 ± 0.40	8.00 ± 0.30	1.37	37.18	27.24	1012.90	4.94
	17.00max	8.50min	8.90max					
T16x9.6x6.1	16.00 ± 0.30	9.60 ± 0.30	6.10 ± 0.30	2.02	38.52	19.10	735.68	3.64
	16.90max	8.70min	7.00max					
T16x10x5	16.00 ± 0.30	10.00 ± 0.30	5.00 ± 0.30	2.67	39.37	14.73	579.87	2.96
	16.90max	9.10min	5.90max					
T16x12x7	16.00 ± 0.30	12.00 ± 0.30	7.00 ± 0.30	3.12	43.38	13.90	603.17	2.86
	16.90max	11.10min	7.90max					
T16x12x8	16.00 ± 0.30	12.00 ± 0.30	8.00 ± 0.30	2.73	43.38	15.89	689.34	3.53
	16.90max	11.10min	8.90max					
T16.4x12x8	16.40 ± 0.30	12.00 ± 0.30	8.00 ± 0.30	2.51	43.89	17.46	766.27	3.80
	17.30max	11.10min	8.90max					
T17x10.6x6.8	17.00 ± 0.30	10.60 ± 0.30	6.80 ± 0.30	1.96	41.78	21.36	892.47	4.54
	17.90max	9.70min	7.70max					
T18x10x7	18.00 ± 0.30	10.00 ± 0.30	7.00 ± 0.30	1.53	41.55	27.21	1130.43	6.13
	18.90max	9.10min	7.90max					
T18x10x10	18.00 ± 0.30	10.00 ± 0.30	10.00 ± 0.30	1.07	41.55	38.87	1614.89	8.77
	18.90max	9.10min	10.90max					
T18x12x6	18.00 ± 0.30	11.90 ± 0.20	6.00 ± 0.20	2.58	45.86	17.76	814.21	4.16
	18.90max	11.10min	6.80max					
T19x11x5	19.00 ± 0.30	11.00 ± 0.30	5.00 ± 0.30	2.30	44.86	19.51	875.14	4.43
	19.90max	10.10min	5.90max					
T19x13x6	19.00 ± 0.30	13.00 ± 0.30	6.00 ± 0.20	2.76	49.08	17.79	872.90	4.39
	19.90max	12.10min	6.80max					
T19.3x10.2x10.4	19.30 ± 0.40	10.20 ± 0.30	10.40 ± 0.30	0.95	43.34	45.75	1982.76	10.55
	20.30max	9.30min	11.30max					

## MANUFACTURING CAPABILITY

Gapped Toroid Sizes(OD)	12.00mm - 38.00mm
Height	3.00mm - 15.00mm
Gap Sizes :	0.45mm - 2.00mm
AL Tolerance	AL ± 10%

## APPLICATIONS

<b>Power</b>	DC-DC Converters Compact Power Transformer Small, Low Profile Power Inductors
<b>Telecom</b>	xDSL pass-band Filters Splitters EMI Inductors Filter Inductors with Tight Tolerance

## ELECTRICAL CHARACTERISTICS

<b>CORES</b>	<b>AL ± 25% (nH/N<sup>2</sup>)</b>					<b>AL ± 30% (nH/N<sup>2</sup>)</b>				
	<b>P4</b>	<b>P47</b>	<b>P5</b>	<b>A05</b>	<b>A07</b>	<b>A10</b>	<b>A102</b>	<b>A121</b>	<b>A13</b>	<b>A151</b>
<b>T14x9x5</b>	1100	1400	870	2210	3090	4420	4420	5220		6530
<b>T14.3x9.7x6.3</b>				2415	3380	4830	4830	5790		7235
<b>T15.7x10.2x6.8</b>					4600					
<b>T15.88x8.89x4.7</b>	1330	1630	1060	2650	3710	5310	5310	6370		7960
<b>T16x7x9</b>	3520	4220		7040	9860	14000	14000	16900		21100
<b>T16x8x8</b>				5540	7500	10670	10670	13300		16640
<b>T16x9x5</b>	1300	1530	1020	2600	3650	5210	5210	6250		7650
<b>T16x9x8</b>	2040	2750	1630	4080	5710	8160	8160	9700		12240
<b>T16x9.6x6.1</b>	1520	1830	1220	3050	4270	6100	6100	7320		9150
<b>T16x10x5</b>				2350	3230	4620		5540		6925
<b>T16x12x7</b>	1000			2000	2800	4020	4020			6000
<b>T16x12x8</b>	1150			2300	3220	4600	4600	5400		6860
<b>T16.4x12x8</b>								5950		
<b>T17x10.6x6.8</b>	1580			3155	4420	6300	6300			
<b>T18x10x7</b>	2054	2470		4110	5760	8230	8230	9600	9600	12000
<b>T18x10x10</b>	2940		2280	5880	8230	11750	11750	13720		17155
<b>T18x12x6</b>	1210	1460	970	2430	3400	4860	4860	5760		7345
<b>T19x11x5</b>	1300	1600	1060	2670	3800	5300		6400		8000
<b>T19x13x6</b>	1100	1360	900	2200	3100	4500	4500	5400		6750
<b>T19.3x10.2x10.4</b>	3210			6420	8990	12840	12840	15400		19260

Remark:


1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Coating Material
  - (1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.
  - (2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.
3. Customized dimensions are available.

## Type : T Cores

Ordering Code:

A10	T20*10*7	C	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

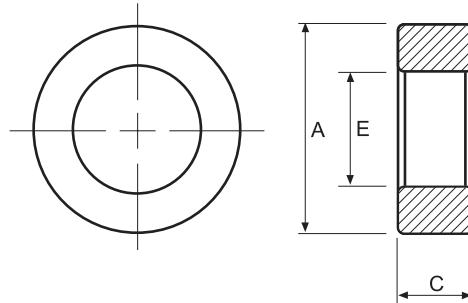

C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free      W : Powder Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	EPOXY COATING DIMENSIONS (mm)			C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>T20x10x7</b>	20.00 ± 0.40	10.00 ± 0.40	7.00 ± 0.30	1.29	43.55	33.63	1464.72	8.05
	21.00max	9.00min	7.90max					
<b>T20x10x10</b>	20.00 ± 0.40	10.00 ± 0.40	10.00 ± 0.30	0.91	43.55	48.05	2092.46	11.24
	21.00max	9.00min	10.90max					
<b>T20x10x12</b>	20.00 ± 0.40	10.00 ± 0.40	12.00 ± 0.30	0.76	43.55	57.65	2510.95	13.53
	21.00max	9.00min	12.90max					
<b>T20x11x10</b>	20.00 ± 0.40	11.00 ± 0.40	10.00 ± 0.30	1.05	45.91	43.68	2005.53	10.29
	21.00max	10.00min	10.90max					
<b>T20x11x15</b>	20.00 ± 0.40	11.00 ± 0.40	15.00 ± 0.30	0.70	45.91	65.52	3008.29	15.23
	21.00max	10.00min	15.90max					
<b>T20x12x8</b>	20.00 ± 0.40	12.00 ± 0.40	8.00 ± 0.30	1.54	48.14	31.31	1507.55	9.17
	21.00max	11.00min	8.90max					
<b>T22x11x7</b>	22.00 ± 0.30	11.00 ± 0.30	7.00 ± 0.30	1.29	47.91	36.99	1772.31	9.74
	22.90max	10.10min	7.90max					
<b>T22x14x6.5</b>	22.00 ± 0.40	14.00 ± 0.40	6.50 ± 0.30	2.14	54.67	25.56	1397.42	6.77
	23.00max	13.00min	7.40max					
<b>T22x14x8</b>	22.00 ± 0.40	14.00 ± 0.40	8.00 ± 0.30	1.74	54.67	31.46	1719.90	8.61
	23.00max	13.00min	8.90max					
<b>T22x14x10</b>	22.00 ± 0.40	14.00 ± 0.40	10.00 ± 0.30	1.39	54.67	39.33	2149.88	11.33
	23.00max	13.00min	10.90max					
<b>T22x14x12.7</b>	22.00 ± 0.40	14.00 ± 0.40	12.70 ± 0.30	1.09	54.67	49.94	2730.34	14.04
	23.00max	13.00min	13.60max					
<b>T22.1x13.72x6.35</b>	22.10 ± 0.40	13.72 ± 0.40	6.35 ± 0.30	2.08	54.19	26.11	1414.81	7.04
	23.10max	12.72min	7.25max					
<b>T23x11x6</b>	23.00 ± 0.40	11.00 ± 0.40	6.00 ± 0.30	1.42	48.86	34.41	1681.17	9.40
	24.00max	10.00min	6.90max					
<b>T23x14x7</b>	23.00 ± 0.40	14.00 ± 0.40	7.00 ± 0.30	1.81	55.80	30.86	1722.01	8.53
	24.00max	13.00min	7.90max					
<b>T24x18x6</b>	24.00 ± 0.40	18.00 ± 0.40	6.00 ± 0.30	3.64	65.07	17.88	1163.25	5.61
	25.00max	17.00min	6.90max					
<b>T25x9x2.5</b>	25.00 ± 0.40	9.00 ± 0.40	2.50 ± 0.30	2.46	45.14	18.35	828.12	5.17
	26.00max	8.00min	3.40max					
<b>T25x15x5</b>	25.00 ± 0.40	15.00 ± 0.40	5.00 ± 0.30	2.46	60.18	24.46	1472.21	7.44
	26.00max	14.00min	5.90max					
<b>T25x15x8</b>	25.00 ± 0.40	15.00 ± 0.40	8.00 ± 0.30	1.54	60.18	39.14	2355.54	12.06
	26.00max	14.00min	8.90max					
<b>T25x15x9</b>	25.00 ± 0.40	15.00 ± 0.40	9.00 ± 0.30	1.37	60.18	44.03	2649.98	13.63
	26.00max	14.00min	9.90max					
<b>T25x15x10</b>	25.00 ± 0.40	15.00 ± 0.40	10.00 ± 0.30	1.23	60.18	48.93	2944.42	14.89
	26.00max	14.00min	10.90max					
<b>T25x15x13</b>	25.00 ± 0.40	15.00 ± 0.40	13.00 ± 0.30	0.95	60.18	63.60	3827.75	19.43
	26.00max	14.00min	13.90max					
<b>T25x15x15</b>	25.00 ± 0.40	15.00 ± 0.40	15.00 ± 0.30	0.82	60.18	73.30	4416.64	23.30
	26.00max	14.00min	15.90max					
<b>T25.4x15.5x10</b>	25.40 ± 0.40	15.50 ± 0.40	10.00 ± 0.30	1.27	61.71	48.51	2993.10	15.71
	26.40max	14.50min	10.90max					
<b>T26x14.5x10</b>	26.00 ± 0.40	14.50 ± 0.30	10.00 ± 0.30	1.08	60.14	55.89	3361.47	17.68
	27.00max	13.60min	10.90max					
<b>T26.4x14.5x10.2</b>	26.40 ± 0.40	14.50 ± 0.40	10.20 ± 0.30	1.03	60.56	58.91	3567.13	18.92
	27.40max	13.50min	11.10max					



## MANUFACTURING CAPABILITY

Gapped Toroid Sizes(OD)	12.00mm - 38.00mm
Height	3.00mm - 15.00mm
Gap Sizes :	0.45mm - 2.00mm
AL Tolerance	AL ± 10%

## APPLICATIONS

<b>Power</b>	DC-DC Converters Compact Power Transformer Small, Low Profile Power Inductors
<b>Telecom</b>	xDSL pass-band Filters Splitters EMI Inductors Filter Inductors with Tight Tolerance

## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )						AL ± 30% (nH/N <sup>2</sup> )			
	P4	P47	P5	A05	A07	A10	A102	A121	A13	A151
T20x10x7	2335	2900		4670	6540	9300	9300	11200		14000
T20x10x10	3330	4100	2660	6670	9300	13300	13300	16000		19000
T20x10x12	4000	4990			11200	16000	16000	19000		
T20x11x10	3200	3500	2300	5800	8100	11600	11600	13950	13950	17420
T20x11x15	4790		3450	8700	12200	17400	17400			26000
T20x12x8				4000	5700	8000	8000	9800		12000
T22x11x7	2340				6540	9330	9330			
T22x14x6.5	1473	1730	1155	2940	4110	5870	5870	6930		8670
T22x14x8	1804	2130	1420	3620	5060	7230	7230	8340		10675
T22x14x10	2259	2700	1780	4520	6330	9040	9040	10670	10670	13340
T22x14x12.7	2886		2260	5740	8040	11480	11480	13560		16945
T22.1x13.72x6.35	1485	1780		2970	4160	5950	5950	7130		8920
T23x11x6	2100									
T23x14x7	1730		1360	3470	4860	6950	6950	8180		10210
T24x18x6				1720	2400	3450				
T25x9x2.5	1176	1410								
T25x15x5	1250		1000	2500	3500	5000	5000	6000		7500
T25x15x8	2040	2450	1600	4090	5720	8200	8200	9600	9600	12010
T25x15x9	2300	2760		4600	6440	9200	9200	10800		13500
T25x15x10	2550	3000	2000	5110	7150	10220	10220	11000		15010
T25x15x13	3322	3980		6640	9300	13270	13270	15600		19510
T25x15x15	3830	4500		7660	10730	15330	15330	17500		22500
T25.4x15.5x10	2420		1940	4840		9680	9680			14530
T26x14.5x10				5680		11370	11370			
T26.4x14.5x10.2				5940		11880	11880			

Remark:


1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Coating Material
  - (1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.
  - (2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.
3. Customized dimensions are available.

## Type : T Cores

Ordering Code:

P4	T28*16*13	C	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

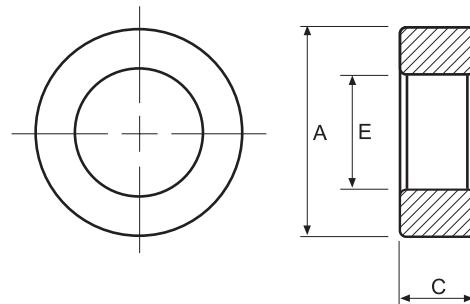

C : Epoxy Coating of Halogen-Free     HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free     W : Powder Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	EPOXY COATING DIMENSIONS (mm)			C <sub>t</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
	A	E	C					
<b>T27x18x11.5</b>	27.00 ± 0.40	18.00 ± 0.40	11.50 ± 0.30	1.74	69.54	39.92	331.36	18.29
	28.00max	17.00min	12.40max					
<b>T28x12x12</b>	28.00 ± 0.40	12.00 ± 0.30	12.00 ± 0.25	0.62	55.90	90.46	5056.48	28.62
	29.00max	11.10min	12.85max					
<b>T28x14x12</b>	28.00 ± 0.60	13.80 ± 0.40	12.00 ± 0.40	0.76	60.97	80.72	4921.46	26.60
	29.20max	12.80min	13.00max					
<b>T28x16x13</b>	28.00 ± 0.50	16.00 ± 0.40	13.00 ± 0.40	0.86	65.64	76.00	4988.00	26.30
	29.10max	15.00min	14.00max					
<b>T28x18x16</b>	28.00 ± 0.50	18.00 ± 0.40	16.00 ± 0.40	0.89	69.96	78.71	5506.49	26.57
	29.10max	17.00min	17.00max					
<b>T29x19x7.49</b>	29.00 ± 0.50	19.00 ± 0.35	7.49 ± 0.30	1.98	73.20	36.90	2700.75	12.90
	30.10max	18.05min	8.24max					
<b>T29x19x15.2</b>	29.00 ± 0.50	19.00 ± 0.35	15.20 ± 0.30	0.98	73.20	74.88	5480.84	27.73
	30.10max	18.05min	16.00max					
<b>T31x19x6</b>	31.00 ± 0.50	19.00 ± 0.50	6.00 ± 0.30	2.14	75.49	35.29	2663.95	13.22
	32.10max	17.90min	6.90max					
<b>T31x19x8</b>	31.00 ± 0.50	19.00 ± 0.50	8.00 ± 0.30	1.60	75.49	47.05	3551.93	18.12
	32.10max	17.90min	8.90max					
<b>T31x19x12</b>	31.00 ± 0.50	19.00 ± 0.50	12.00 ± 0.40	1.07	75.49	70.58	5327.90	26.99
	32.10max	17.90min	13.00max					
<b>T31x19x13</b>	31.00 ± 0.50	19.00 ± 0.50	13.00 ± 0.40	0.99	75.49	76.46	5771.89	29.04
	32.10max	17.90min	14.00max					
<b>T31x19x16</b>	31.00 ± 0.50	19.00 ± 0.50	16.00 ± 0.40	0.80	75.49	94.11	7103.86	35.74
	32.10max	17.90min	17.00max					
<b>T31x20x15</b>	31.00 ± 0.50	20.00 ± 0.50	15.00 ± 0.50	0.96	77.60	81.19	6300.71	30.72
	32.10max	18.90min	16.00max					
<b>T34.4x20.2x12.6</b>	34.40 ± 0.50	20.20 ± 0.50	12.60 ± 0.40	0.94	81.84	87.38	7151.28	36.92
	35.50max	19.10min	13.60max					
<b>T34.74x5.4x1.0</b>	34.74 ± 0.50	5.40 ± 0.25	1.00 ± 0.10	3.38	37.39	11.08	414.22	4.23
	—	—	—					
<b>T35.5x17.5x15</b>	35.50 ± 0.60	17.50 ± 0.40	15.00 ± 0.40	0.59	76.69	129.51	9932.12	54.85
	37.20max	16.50min	16.00max					
<b>T36x23x15</b>	36.00 ± 0.60	23.45 ± 0.50	15.00 ± 0.40	0.93	89.65	95.89	8595.89	41.37
	37.20max	22.35min	16.00max					
<b>T36x23Ax22</b>	36.00 ± 0.60	23.45 ± 0.50	22.00 ± 0.40	0.67	90.58	135.96	12315.43	62.50
	37.20max	22.35min	23.00max					
<b>T36x25x11.3</b>	36.00 ± 0.50	25.00 ± 0.40	11.30 ± 0.30	1.52	93.73	61.47	5761.05	27.30
	37.10max	24.00min	12.20max					
<b>T36x26x10</b>	36.00 ± 0.60	26.00 ± 0.50	10.00 ± 0.40	1.93	95.69	49.56	4742.57	19.50
	37.20max	24.90min	11.00max					
<b>T37x22x15</b>	37.00 ± 0.60	22.00 ± 0.50	15.00 ± 0.40	0.81	88.63	110.00	9749.34	50.51
	38.20max	20.90min	16.00max					
<b>T38x19x13</b>	38.10 ± 0.60	19.05 ± 0.60	13.00 ± 0.30	0.70	82.75	118.67	9819.89	53.19
	39.30max	17.85min	13.90max					
<b>T38x20.5x13.8</b>	38.00 ± 0.50	20.50 ± 0.30	13.80 ± 0.30	0.74	86.31	116.99	10097.03	52.20
	39.10max	19.60min	14.80max					
<b>T38x22x14</b>	38.00 ± 0.60	22.00 ± 0.60	14.00 ± 0.40	0.82	89.71	109.25	9801.55	50.07
	39.20max	20.80min	15.00max					



## MANUFACTURING CAPABILITY

Gapped Toroid Sizes(OD)	12.00mm - 38.00mm
Height	3.00mm - 15.00mm
Gap Sizes :	0.45mm - 2.00mm
AL Tolerance	AL ± 10%

## APPLICATIONS

<b>Power</b>	DC-DC Converters Compact Power Transformer Small, Low Profile Power Inductors
<b>Telecom</b>	xDSL pass-band Filters Splitters EMI Inductors Filter Inductors with Tight Tolerance

## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )					AL ± 30% (nH/N <sup>2</sup> )				
	P4	P47	P5	A05	A07	A10	A102	A121	A13	A151
T27x18x11.5					6200	8400		10000		
T28x12x12	5000									
T28x14x12		5100								
T28x16x13	3550	4300		7200	9900	14110	14110	17000		
T28x18x16				6960						
T29x19x7.49	1580	1900		3170	4430	6340	6340	7495		
T29x19x15.2	3220	3800	2500	6440	9020	12890	12890	15200		
T31x19x6	1465			2940	4110	5880	5880	6910		
T31x19x8	1965		1560	3920	5480	7830	7830	9220		
T31x19x12	2930			5870	8220	11740	11740			
T31x19x13	3180	3820	2500	6360	8910	12730	12730	14500		
T31x19x16	3840			7685	10760	15200	15200	18400		
T31x20x15				6470	9200	13150				
T34.4x20.2x12.6	3270	4000		6560	9180					
T34.74x5.4x1.0	830									
T35.5x17.5x15		6300								
T36x23x15	3210			6430	9000	12860	12860	14500		
T36x23Ax22					11800					
T36x25x11.3	2100									
T36x26x10	1650									
T37x22x15	3900			7790	10900	15500	15500	13000min		
T38x19x13	4200	5200	3350	8400	11800	16800	16800	20800	20800	
T38x20.5x13.8										
T38x22x14	3820			7650	10710	15300				

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.

2. Coating Material

(1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.

(2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.


3. Customized dimensions are available.

## Type : T Cores

Ordering Code:

A05	T48*30*15	C	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

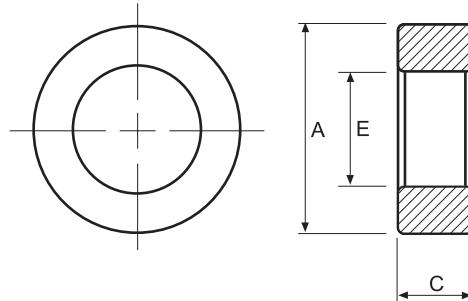

C : Epoxy Coating of Halogen-Free     HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free     W : Powder Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	EPOXY COATING DIMENSIONS (mm)			C <sub>i</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
	A	E	C					
<b>T40x5.3x1.0</b>	40.00 ± 0.80	5.30 ± 0.40	1.00 ± 0.10	3.11	38.79	12.48	484.11	5.98
	41.40max	4.30min	1.70max					
<b>T40x22x20</b>	40.00 ± 0.80	22.00 ± 0.80	20.00 ± 0.50	0.54	97.34	180.00	17521.20	83.32
	42.00max	20.40min	21.50max					
<b>T40x24x16</b>	40.00 ± 0.80	24.00 ± 0.80	16.00 ± 0.50	0.77	96.29	125.25	12060.36	61.82
	41.40max	22.60min	17.10max					
<b>T40x25x20</b>	40.00 ± 0.80	25.00 ± 0.80	20.00 ± 0.40	0.67	98.44	147.27	14496.76	73.00
	41.40max	23.60min	21.00max					
<b>T42x26x12.8</b>	42.00 ± 0.80	26.00 ± 0.80	12.80 ± 0.40	1.02	102.83	100.46	10329.98	52.07
	43.40max	24.60min	13.80max					
<b>T45x28x8</b>	45.00 ± 0.80	28.00 ± 0.80	8.00 ± 0.40	1.67	110.48	66.74	7373.00	35.02
	46.40max	26.60min	9.00max					
<b>T47x27x15</b>	47.00 ± 0.80	27.00 ± 0.60	15.00 ± 0.40	0.76	110.49	146.22	16156.02	82.03
	48.40max	25.80min	16.00max					
<b>T48x30x15</b>	48.00 ± 0.80	30.00 ± 0.80	15.00 ± 0.40	0.89	118.12	132.54	15656.50	79.39
	49.40max	28.60min	16.00max					
<b>T48x32x17</b>	48.00 ± 0.80	32.00 ± 0.90	17.00 ± 0.60	0.91	122.29	134.15	16404.83	82.33
	49.40max	30.50min	18.20max					
<b>T49.1x33.8x15.9</b>	49.10 ± 1.00	33.80 ± 1.00	15.90 ± 0.40	1.06	127.24	120.23	15298.45	76.17
	50.70max	32.20min	16.90max					
<b>T50x30x20</b>	50.00 ± 1.00	30.00 ± 1.00	20.00 ± 0.40	0.62	120.36	195.71	23555.40	118.20
	51.60max	28.40min	21.00max					
<b>T50x34x30</b>	50.00 ± 0.60	34.00 ± 0.50	30.00 ± 0.40	0.54	128.73	237.05	30515.55	153.50
	51.20max	32.90min	31.00max					
<b>T50.8x31.75x26</b>	50.80 ± 1.00	31.75 ± 1.00	26.00 ± 0.50	0.51	125.00	243.14	30396.40	153.61
	52.40max	30.15min	27.10max					
<b>T51x31x20</b>	51.00 ± 0.70	31.00 ± 0.50	20.00 ± 0.50	0.63	123.63	195.92	24222.49	126.50
	52.50max	29.70min	21.00max					
<b>T55.5x32.6x18</b>	55.50 ± 1.10	32.60 ± 1.10	18.00 ± 0.50	0.66	132.07	201.31	26585.86	133.44
	57.20max	30.90min	19.10max					
<b>T56x26x20</b>	56.00 ± 1.00	26.00 ± 1.00	20.00 ± 0.40	0.41	116.98	285.71	33422.36	158.70
	57.60max	24.40min	21.00max					
<b>T58.3x40.8x17.6</b>	58.30 ± 1.60	40.80 ± 1.00	17.60 ± 0.50	1.00	152.41	152.38	23223.44	112.02
	60.50max	39.20min	18.70max					
<b>T63x38x25</b>	62.80 ± 1.60	37.60 ± 1.20	25.00 ± 0.60	0.50	152.09	305.93	46528.26	240.25
	65.00max	35.80min	26.20max					
<b>T78x50.5x16</b>	78.00 ± 1.50	50.50 ± 1.50	16.00 ± 0.50	0.90	195.63	216.57	42366.42	213.00
	80.10max	48.40min	17.10max					
<b>T80x40x15</b>	80.00 ± 1.50	40.00 ± 1.30	15.00 ± 0.60	0.60	174.21	288.27	50218.93	269.76
	82.10max	38.10min	16.20max					
<b>T85x62x20</b>	85.00 ± 1.70	62.00 ± 1.00	20.00 ± 0.80	1.00	227.12	228.10	51806.37	253.41
	87.30max	60.40min	21.40max					
<b>T85.7x55.5x17.2</b>	85.70 ± 1.50	55.50 ± 1.50	17.20 ± 0.40	0.84	214.97	255.67	54961.79	206.18
	87.80max	53.40min	18.20max					
<b>T87x56x15</b>	87.00 ± 1.50	56.00 ± 1.50	15.00 ± 0.40	0.95	217.52	228.78	49763.04	255.00
	89.10max	53.90min	16.00max					
<b>T96x75x25</b>	96.00 ± 1.50	75.00 ± 1.50	25.00 ± 0.40	1.02	265.90	261.17	69444.66	345.07
	98.10max	72.90min	26.00max					
<b>T117x80x23</b>	117.00 ± 2.50	80.00 ± 2.00	23.00 ± 1.00	0.72	302.00	419.00	126538.00	634.30
	120.30max	77.20min	24.80max					
<b>T140x103x25</b>	140.00 ± 3.00	103.00 ± 2.00	25.00 ± 1.00	0.82	375.80	458.90	172440.00	860.00
	143.80max	100.20min	27.20max					



## MANUFACTURING CAPABILITY

Gapped Toroid Sizes(OD)	12.00mm - 38.00mm
Height	3.00mm - 15.00mm
Gap Sizes :	0.45mm - 2.00mm
AL Tolerance	AL ± 10%

## APPLICATIONS

<b>Power</b>	DC-DC Converters Compact Power Transformer Small, Low Profile Power Inductors
<b>Telecom</b>	xDSL pass-band Filters Splitters EMI Inductors Filter Inductors with Tight Tolerance

## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )						AL ± 30% (nH/N <sup>2</sup> )				
	P4	P41	P47	P5	A05	A07	A10	A102	A121	A13	A151
T40x5.3x1.0	1030										
T40x22x20					12000						
T40x24x16	4000		4800	3200	8000	11200	16000		19200		
T40x25x20	4600		5540	3690	9230	12930	18460				
T42x26x12.8	3010				6030	8500			14460		
T45x28x8		1800									
T47x27x15					8100	11350	16000		19400		
T48x30x15	3465				6930	9700	13860	13860	16600		
T48x32x17							13600	13600			
T49.1x33.8x15.9	2935				5870		11750	11750	14100		
T50x30x20	5000		6000		10000	12250	17300				
T50x34x30					11000						
T50.8x31.75x26							21000				
T51x31x20					10000	13500					
T55.5x32.6x18	4683				9365	13100	18730	18730			
T56x26x20					15300						
T58.3x40.8x17.6	3100				6000	8697					
T63x38x25	6200		7585		12500	17700	24770	24770			
T78x50.5x16	3430				6850	9590	13500	13500			
T80x40x15	5200										
T85x62x20					6260		12000	12000			
T85.7x55.5x17.2					7500						
T87x56x15							10400				
T96x75x25					6150						
T117x80x23					8000						
T140x103x25		3000									

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.

2. Coating Material

(1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.

(2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.


3. Customized dimensions are available.

## Type : RH Cores

Ordering Code:

A05	RH3*1.2*6.5	C
Material 材質	Core Size 品名	Coating 塗裝

Shape:

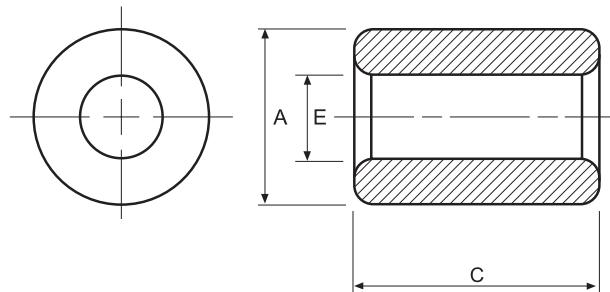

C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free

HP : Parylene Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	PARYLENE COATING DIMENSIONS (mm)			C <sub>i</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
	A	E	C					
<b>RH3x1.2x3.5</b>	3.00 ± 0.15	1.20 ± 0.15	3.50 ± 0.20	1.96	5.76	2.94	16.92	0.100
	3.00 ± 0.15	1.20 ± 0.15	3.50 ± 0.20					
<b>RH3x1.2x6.5</b>	3.00 ± 0.15	1.20 ± 0.15	6.50 ± 0.20	1.05	5.76	5.46	31.42	0.185
	3.00 ± 0.15	1.20 ± 0.15	6.50 ± 0.20					
<b>RH3x1.2x7</b>	3.00 ± 0.15	1.20 ± 0.15	7.00 ± 0.20	0.98	5.76	5.88	33.84	0.199
	3.00 ± 0.15	1.20 ± 0.15	7.00 ± 0.20					
<b>RH3.5x1.2x3.8</b>	3.50 ± 0.20	1.20 ± 0.15	3.80 ± 0.20	1.54	6.14	3.98	24.41	0.16
	3.50 ± 0.20	1.20 ± 0.15	3.80 ± 0.20					
<b>RH4.1x2.7x10</b>	4.10 ± 0.10	2.70 ± 0.10	10.00 ± 0.20	1.50	10.38	6.90	71.59	0.35
	4.10 ± 0.10	2.70 ± 0.10	10.00 ± 0.20					
<b>RH5.15x2.5x13.4</b>	5.15 ± 0.15	2.65 ± 0.15	13.20 ± 0.20	0.65	11.03	17.00	187.55	1.04
	5.15 ± 0.15	2.65 ± 0.15	13.20 ± 0.20					
<b>RH5.33x1.58x5.08</b>	5.33 ± 0.23	1.58 ± 0.12	5.08 ± 0.23	1.02	8.58	8.43	72.35	0.50
	5.33 ± 0.23	1.58 ± 0.12	5.08 ± 0.23					
<b>RH5.6x2.65x12.7</b>	5.35 ± 0.25	2.65 ± 0.25	12.70 ± 0.45	0.66	11.82	17.88	211.45	1.00
	5.35 ± 0.25	2.65 ± 0.25	12.70 ± 0.45					
<b>RH6x3x25</b>	6.00 ± 0.25	3.00 ± 0.25	25.00 ± 0.25	0.36	13.07	36.03	470.80	2.51
	6.00 ± 0.25	3.00 ± 0.25	25.00 ± 0.25					
<b>RH6.6x3.3x10.7</b>	6.60 ± 0.20	3.30 ± 0.20	10.70 ± 0.20	0.85	14.37	16.96	243.82	1.32
	6.60 ± 0.20	3.30 ± 0.20	10.70 ± 0.20					
<b>RH7.8x4x12.7</b>	7.80 ± 0.25	4.00 ± 0.20	12.70 ± 0.40	0.74	17.23	23.25	400.60	2.32
	8.65max*	3.20min*	13.70max*					
<b>RH9.5x4.8x9.5</b>	9.50 ± 0.25	4.80 ± 0.30	9.50 ± 0.30	0.97	20.81	21.48	446.91	2.43
	10.35max*	3.90min*	10.40max*					
<b>RH9.75x6.7x15</b>	9.75 ± 0.30	6.70 ± 0.30	15.00 ± 0.30	1.12	25.24	22.61	570.71	2.86
	10.65max*	5.80min*	15.90max*					
<b>RH9.75x6.7x19.6</b>	9.75 ± 0.30	6.70 ± 0.30	19.60 ± 0.30	0.85	25.24	29.54	745.73	3.65
	10.65max*	5.80min*	20.50max*					
<b>RH10x4.5x20</b>	10.00 ± 0.30	4.50 ± 0.30	20.00 ± 0.50	0.39	20.52	52.17	1070.75	5.92
	10.90max*	3.60min*	21.10max*					
<b>RH10.5x5.5x20</b>	10.50 ± 0.35	5.50 ± 0.20	20.00 ± 0.50	0.49	23.46	48.29	1132.88	6.53
	11.45max*	4.70min*	21.10max*					
<b>RH17x4.5x19</b>	17.00 ± 0.40	4.50 ± 0.30	19.00 ± 0.80	0.25	25.55	102.71	2624.73	18.80
	—	—	—					
<b>RH17.42x9.5x28.57</b>	17.42 ± 0.50	9.52 ± 0.30	28.57 ± 0.70	0.36	39.85	109.48	4362.78	24.83
	18.52max*	8.62min*	29.87max*					

Remark:

\* Epoxy coating dimensions.



## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )					AL ± 30% (nH/N <sup>2</sup> )				
	P4	P5	A05	A07	A071	A10	A102	A121	A13	A151
RH3x1.2x3.5			3000							
RH3x1.2x6.5			5575							
RH3x1.2x7			6000							
RH3.5x1.2x3.8	1860	1480								
RH4.1x2.7x10	2000									
RH5.15x2.5x13.4	4600									
RH5.33x1.58x5.08	2700									
RH5.6x2.65x12.7	4500									
RH6x3x25	8000									
RH6.6x3.3x10.7	3500									
RH7.8x4x12.7					11870					
RH9.5x4.8x9.5	3300									
RH9.75x6.7x15	2780									
RH9.75x6.7x19.6	3635									
RH10x4.5x20	8000									
RH10.5x5.5x20					18110					
RH17x4.5x19	11000									
RH17.42x9.5x28.57					24100					

Remark:

1. AL Value Testing Condition : 10kHz, 50mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Coating Material
  - (1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.
  - (2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.
3. Customized dimensions are available.

## Type : R Cores


Ordering Code:

H5	R1.6xC
Material 材質	Core Size 品名


C : Highly

Shape:


Type:1

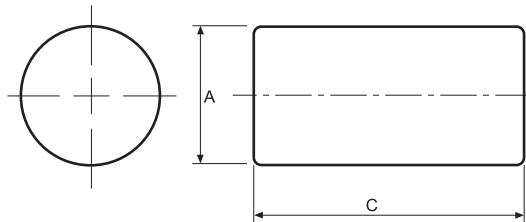

Type:2

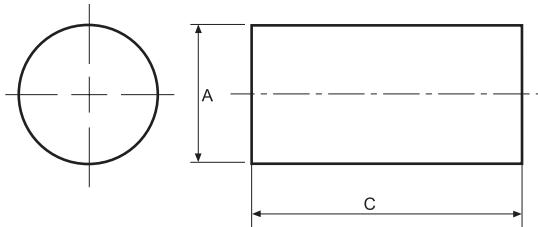

Type:3

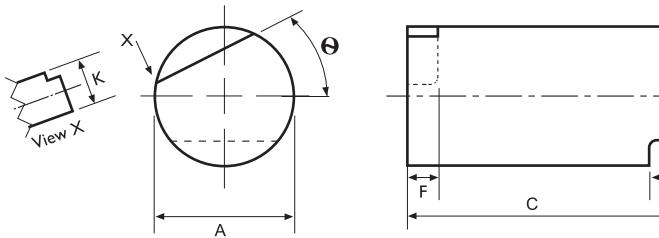

## DIMENSIONS

CORES	DIMENSIONS (mm)			Type
	A	C	Θ	
R1.6xC	1.60 ± 0.10	7.00 - 16.00	—	2
R1.8xC	1.80 <sup>+ 0.00</sup> <sub>- 0.05</sub>	7.00 - 18.00	—	1
R2.0xC	2.00 ± 0.10	7.00 - 18.00	—	1
R2.4xC	2.40 <sup>+ 0.00</sup> <sub>- 0.20</sub>	7.00 - 20.00	—	1
R2.5xC	2.50 <sup>+ 0.00</sup> <sub>- 0.05</sub>	7.00 - 20.00	—	2
R3.0xC	3.00 ± 0.15	7.00 - 28.00	—	1
R3.5xC	3.50 ± 0.15	7.00 - 28.00	—	1
R4.0xC	4.00 <sup>+ 0.00</sup> <sub>- 0.10</sub>	15.00 - 25.00	45° (Ref)	3
R4.0xC	4.00 ± 0.15	7.00 - 30.00	—	1
R4.6xC	4.60 <sup>+ 0.00</sup> <sub>- 0.25</sub>	7.00 - 30.00	—	1
R5.0xC	5.00 <sup>+ 0.00</sup> <sub>- 0.10</sub>	15.00 - 30.00	60° (Ref)	3
R5.0xC	5.00 ± 0.20	7.00 - 35.00	—	1
R5.2xC	5.25 <sup>+ 0.00</sup> <sub>- 0.10</sub>	15.00 - 25.00	20° (Ref)	3
R5.5xC	5.50 <sup>+ 0.00</sup> <sub>- 0.10</sub>	15.00 - 25.00	90° (Ref)	3
R6.0xC	6.00 <sup>+ 0.00</sup> <sub>- 0.10</sub>	15.00 - 29.00	30° (Ref)	3
R6.0xC	6.00 <sup>+ 0.00</sup> <sub>- 0.30</sub>	7.00 - 38.00	—	1
R6.5xC	6.50 <sup>+ 0.00</sup> <sub>- 0.30</sub>	7.00 - 38.00	—	1
R7.0xC	7.00 ± 0.20	7.00 - 40.00	—	1
R7.0xC	7.00 <sup>+ 0.00</sup> <sub>- 0.20</sub>	15.00 - 29.00	50° (Ref)	3
R8.0xC	8.00 ± 0.20	7.00 - 40.00	—	1
R8.0xC	8.00 <sup>+ 0.00</sup> <sub>- 0.40</sub>	7.00 - 40.00	—	1
R8.0xC	8.00 <sup>+ 0.00</sup> <sub>- 0.20</sub>	15.00 - 29.00	55° (Ref)	3
R9.5xC	9.50 ± 0.20	7.00 - 40.00	—	1
R10xC	10.00 ± 0.20	7.00 - 40.00	—	1
R10xC	10.00 <sup>+ 0.00</sup> <sub>- 0.40</sub>	7.00 - 40.00	—	1
R12.0xC	12.00 ± 0.20	7.00 - 40.00	—	1

Remark: Customized dimensions are available.

## Type : SC Cores

Ordering Code: K081


SC8.4\*8

Material  
材質


Core Size  
品名

Shape:


Type:1

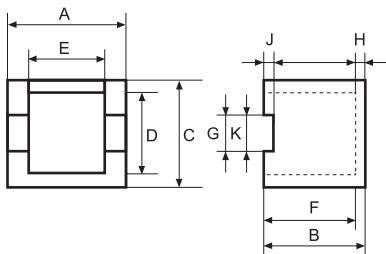


Type:2

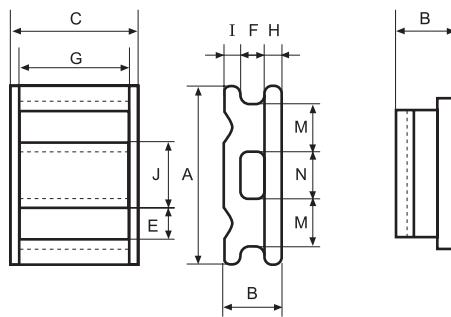


Type:3

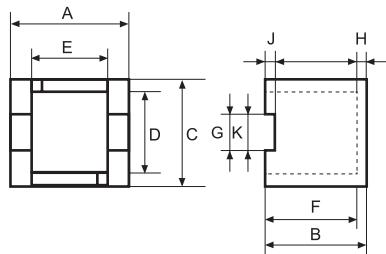

Type:4

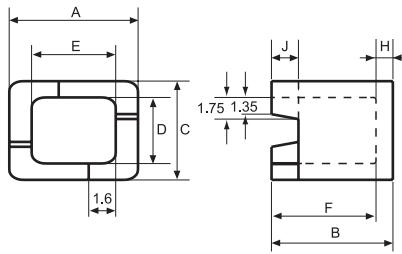

Type:5

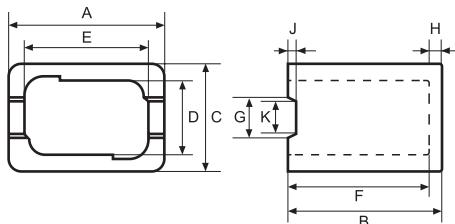

## DIMENSIONS

CORES	DIMENSIONS (mm)						
	A	B	C	D	E	F	G
<b>SC7.8</b>	$7.80 \pm 0.20$	$7.00 \pm 0.20$	$7.80 \pm 0.20$	$5.60 \pm 0.15$	$5.95 \pm 0.15$	$5.90 \pm 0.20$	$2.80 \pm 0.20$
<b>SC8.4x8</b>	$8.40 \pm 0.15$	$9.00 \pm 0.15$	$8.00 \pm 0.15$	$6.50 \pm 0.15$	$4.90 \pm 0.15$	$7.70 \pm 0.15$	$0.80 \pm 0.15$
<b>SC10x8x9.3</b>	$10.00 \pm 0.20$	$9.30 \pm 0.20$	$8.00 \pm 0.20$	$5.35 \pm 0.15$	$7.35 \pm 0.15$	$8.30 \pm 0.20$	-
<b>SC10.4x10x9</b>	$10.40 \pm 0.20$	$9.00 \pm 0.20$	$10.00 \pm 0.20$	$7.20 \pm 0.15$	$8.20 \pm 0.15$	$8.00 \pm 0.20$	$3.50 \pm 0.20$
<b>SC11.3</b>	$11.30 \pm 0.20$	$9.80 \pm 0.15$	$11.30 \pm 0.20$	$8.50 \pm 0.15$	$7.80 \pm 0.15$	$8.60 \pm 0.15$	$3.90 \pm 0.10$
<b>SC11.4A</b>	$11.40 \pm 0.20$	$9.50 \pm 0.20$	$11.40 \pm 0.20$	$8.35 \pm 0.15$	$8.90 \pm 0.15$	$8.20 \pm 0.20$	$4.00 \pm 0.20$
<b>SC11.6x10</b>	$11.60 \pm 0.20$	$10.00 \pm 0.20$	$11.60 \pm 0.20$	$9.20 \pm 0.15$	$7.70 \pm 0.15$	$8.65 \pm 0.15$	$3.50 \pm 0.15$
<b>SC12x10</b>	$12.00 \pm 0.20$	$4.60 \pm 0.15$	$10.00 \pm 0.20$	-	$2.10 \pm 0.15$	$1.80 \pm 0.10$	$8.50 \pm 0.20$

## EFFECTIVE PARAMETERS AND ELECTRICAL CHARACTERISTICS

CORES	DIMENSIONS (mm)					Wt(g/set)	Type
	H	J	K	M	N		
<b>SC7.8</b>	$1.10 \pm 0.20$	$0.22 \pm 0.10$	$2.60 \pm 0.20$	-	-	1.46	5
<b>SC8.4x8</b>	$1.30 \pm 0.10$	$0.55 \pm 0.10$	-	-	-	1.86	1
<b>SC10x8x9.3</b>	$2.00 \pm 0.20$	$1.60 \pm 0.15$	-	-	-	1.91	4
<b>SC10.4x10x9</b>	$1.00 \pm 0.20$	$0.22 \pm 0.10$	$3.30 \pm 0.20$	-	-	2.84	5
<b>SC11.3</b>	$1.20 \pm 0.10$	$0.80 \pm 0.10$	$3.40 \pm 0.10$	-	-	2.90	1
<b>SC11.4A</b>	$1.30 \pm 0.20$	$0.27 \pm 0.10$	$3.80 \pm 0.20$	-	-	3.25	5
<b>SC11.6x10</b>	$1.35 \pm 0.10$	$0.80 \pm 0.10$	$3.40 \pm 0.15$	-	-	3.80	3
<b>SC12x10</b>	$1.40 \pm 0.10$	$4.30 \pm 0.15$	-	$3.40 \pm 0.15$	$3.00 \pm 0.15$	2.04	2

Remark: Customized dimensions are available.


## Type : RID Cores

Ordering Code:

K081	RID5*3*3	HP
Material 材質	Core Size 品名	Coating 塗裝


Shape:

Type:1

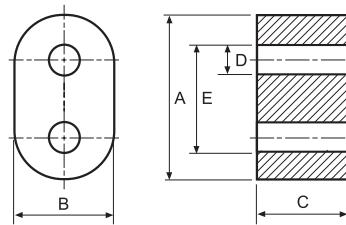


C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free


Type:2

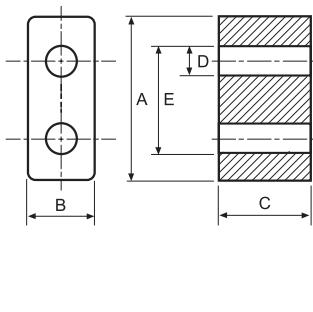

Type:3

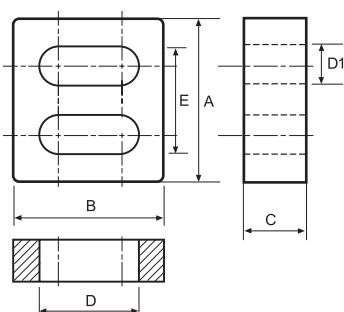

Type:4

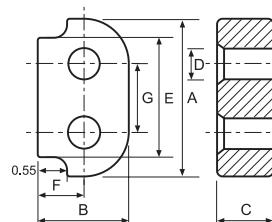

## DIMENSIONS

CORES	DIMENSIONS (mm)						Wt(g/set)	Type
	A	B	C	D	D1	E		
<b>RID2.5x2.1x1.0</b>	2.50 ± 0.15	2.10 ± 0.15	1.00 ± 0.15	1.00 ± 0.15	0.55 ± 0.15	1.75 ± 0.15	0.022	3
<b>RID3.1x1.8x1.2</b>	3.10 ± 0.10	1.80 ± 0.10	1.20 ± 0.10	0.90 ± 0.10	—	2.20 ± 0.15	0.027	2
<b>RID3.4x1.3x2.1</b>	3.40 ± 0.20	1.30 ± 0.20	2.10 ± 0.20	0.60 ± 0.10	—	2.40 ± 0.20	0.032	4
<b>RID3.6x2.1x2.35</b>	3.60 ± 0.25	2.10 ± 0.20	2.35 ± 0.15	0.80 ± 0.15	—	2.33 ± 0.25	—	1
<b>RID5x2x2.8</b>	5.00 ± 0.20	2.00 ± 0.10	2.80 ± 0.20	1.10 ref	—	—	—	1
<b>RID5x2.3x3.5</b>	5.00 ± 0.20	2.30 ± 0.15	3.50 ± 0.20	1.20 ± 0.10	—	—	—	1
<b>RID5x3x3</b>	5.00 ± 0.30	3.00 ± 0.20	3.00 ± 0.30	1.20 ± 0.20	—	3.20 ± 0.20	—	1
<b>RID5.1x2.6x4.2</b>	5.10 ± 0.25	2.60 ± 0.20	4.20 <sup>+0.00</sup> <sub>-0.40</sub>	1.40 ± 0.10	—	—	—	1
<b>RID5.2x3x2</b>	5.20 ± 0.30	3.00 ± 0.20	2.00 ± 0.20	1.20 ± 0.10	—	2.60ref	0.112	1
<b>RID6x3x5</b>	6.00 ± 0.30	3.00 ± 0.30	5.00 ± 0.30	1.50 ± 0.10	—	—	—	1
<b>RID6.9x4.06x6.35</b>	6.90 ± 0.30	4.06 ± 0.25	6.35 ± 0.38	1.50 ± 0.10	—	—	—	1
<b>RID7.1x4.0x8.0</b>	7.10 ± 0.20	4.00 ± 0.20	8.00 ± 0.20	2.20 ± 0.10	—	—	—	1
<b>RID8.4x4.2x7</b>	8.40 ± 0.25	4.20 ± 0.20	7.00 ± 0.20	1.90 ± 0.10	—	—	—	2
<b>RID9.4x5.3x8</b>	9.40 ± 0.35	5.30 ± 0.15	8.00 ± 0.25	2.59 ± 0.10	—	—	—	2
<b>RID12x6.8x4</b>	12.00 ± 0.40	6.80 ± 0.30	4.00 ± 0.30	3.80 ± 0.20	—	—	—	1
<b>RID13.3x7.5x6.6</b>	13.30 ± 0.50	7.50 ± 0.40	6.60 ± 0.25	3.80 ± 0.25	—	9.50 ± 0.30	—	1
<b>RID13.5x7.5x14</b>	13.50 ± 0.30	7.50 ± 0.25	14.00 ± 0.30	4.20 ± 0.20	—	10.30 ± 0.30	5.20	1
<b>RID20x10x15</b>	20.00 ± 0.50	10.00 ± 0.30	15.00 ± 0.50	5.10 <sup>+0.30</sup> <sub>-0.00</sub>	—	—	—	2

Remark: Customized dimensions are available.

## Type : R Cores (Multi Aperture)


Ordering Code:

H5	R2H7/5.5
Material 材質	Core Size 品名


R2H:2 Holes

Shape:


Type:1

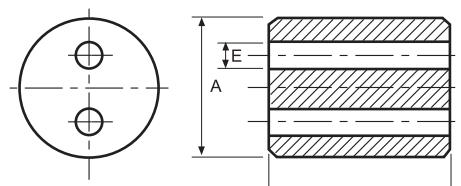

Type:2

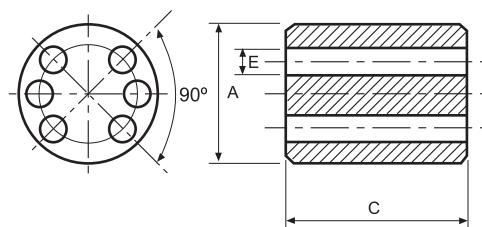

Type:3

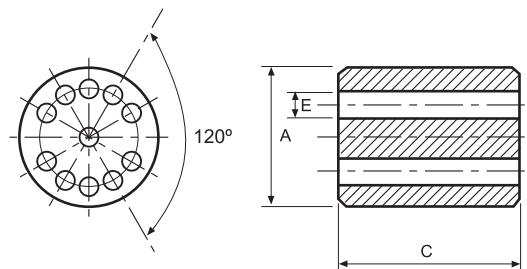

### DIMENSIONS


CORES	DIMENSIONS (mm)				Type
	A	C	E	L	
<b>R2H7/5.5</b>	$7.00 \pm 0.20$	$5.50 \pm 0.30$	$1.80 \pm 0.15$	3.00 ref	1
<b>R6H6/10</b>	$6.00 \pm 0.25$	$10.00 \pm 0.25$	$0.85 \pm 0.20$	3.50 ref	2
<b>R11H10/10</b>	$10.00 \pm 0.25$	$10.00 \pm 0.25$	$0.90 \pm 0.15$	7.50 ref	3

## Type : AR Cores

Ordering Code:

H5	AR4.1*4.2*40
Material 材質	Core Size 品名

Shape:

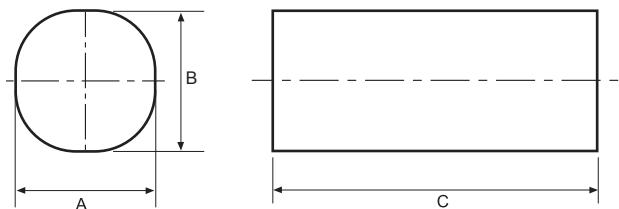

## DIMENSIONS

CORES	DIMENSIONS (mm)		
	A	B	C
AR4.1x4.2x40	4.10 ± 0.20	4.20 ± 0.20	40.00 ± 1.00
AR4.1x5x40	4.10 ± 0.20	5.00 ± 0.20	40.00 ± 1.00
AR6.15x6.35x50	6.15 ± 0.20	6.35 ± 0.20	50.00 ± 1.00
AR6.15x6.35x95.25	6.15 ± 0.15	6.35 ± 0.25	95.25 ± 1.00
AR9x10x50	9.00 ± 0.30	10.00 ± 0.30	50.00 ± 1.00
AR9x10x60	9.00 ± 0.30	10.00 ± 0.30	60.00 ± 1.00
AR9.2x9.4x50.8	9.20 ± 0.30	9.40 ± 0.30	50.80 ± 1.00
AR9.2x9.4x76.2	9.20 ± 0.30	9.40 ± 0.30	76.20 ± 0.50
AR11x12x60	11.00 ± 0.30	12.00 ± 0.40	60.00 ± 1.60

Remark: Customized dimensions are available.


## Type : FC/OT Cores

Ordering Code:


K081	OT26.8*19.65*8
Material 材質	Core Size 品名

Shape:

Type:1

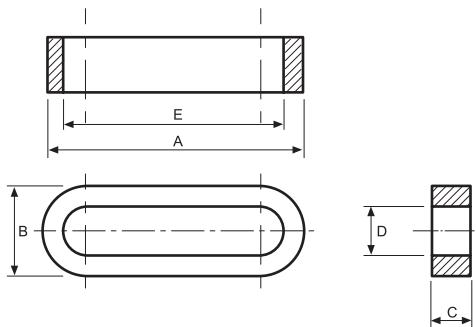

Type:2

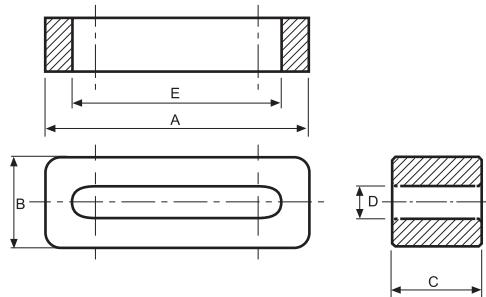

### DIMENSIONS

CORES	DIMENSIONS (mm)					Type
	A	B	C	D	E	
FC14.5x2.75x15	14.50 ± 0.50	2.75 ± 0.30	15.00 ± 0.40	0.70 ± 0.30	11.00 ± 0.40	1
FC14.5x2.75x20	14.50 ± 0.50	2.75 ± 0.30	20.00 ± 0.50	0.70 ± 0.30	11.00 ± 0.40	1
FC15.5x3.4x10	15.50 ± 0.38	3.40 ± 0.51	10.00 ± 0.25	1.40 ± 0.51	13.50 ± 0.38	1
FC17x5x6	17.00 ± 0.40	5.00 ± 0.30	6.00 ± 0.50	0.80 ± 0.40	13.00 ± 0.40	1
FC17x5x9	17.00 ± 0.40	5.00 ± 0.30	9.00 ± 0.50	0.80 ± 0.40	13.00 ± 0.40	1
FC22.35x7.75x19.05	22.35 ± 0.51	7.75 ± 0.38	19.05 ± 0.64	1.50 ± 0.15	14.00 ± 0.25	2
FC24.5x5x7	24.50 ± 0.50	5.00 <sup>+0.00</sup> <sub>-0.60</sub>	7.00 ± 0.30	0.50 <sup>+0.50</sup> <sub>-0.00</sub>	20.00 <sup>+1.00</sup> <sub>-0.00</sub>	1
FC31x5x12	31.00 ± 0.70	5.00 <sup>+0.00</sup> <sub>-0.70</sub>	12.00 ± 0.50	1.00 ± 0.50	27.00 <sup>+0.08</sup> <sub>-0.60</sub>	1
FC31.4x7.75x21	31.40 ± 0.51	7.75 ± 0.38	21.00 ± 0.64	1.00 ± 0.50	23.00 ± 0.38	2
FC37x8x18.25	37.00 ± 0.80	8.00 ± 0.50	18.25 ± 1.00	1.50 ± 0.40	27.00 ± 0.80	1
OT26.8x19.65x8	26.80 ± 0.30	25.80 ± 0.30	8.00 ± 0.30	18.65 ± 0.45	19.65 ± 0.45	1

Remark: Customized dimensions are available.

## Type : I Cores (Plates)



Ordering Code:

H5	I11*2*1
Material	Core Size
材質	品名

Shape:



Type:1

Type:2

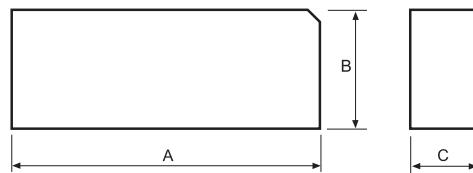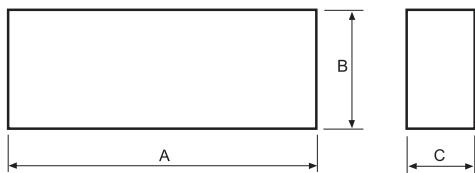

Type:3

Type:4

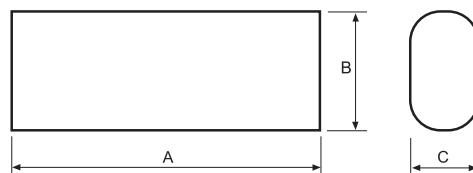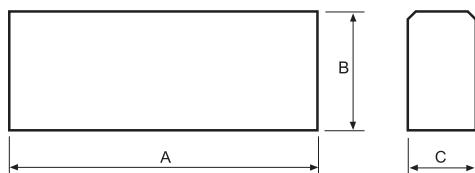

### DIMENSIONS

CORES	DIMENSIONS (mm)			Type
	A	B	C	
I11x2x1	11.00 $\pm$ 0.10	2.00 $\pm$ 0.05	1.00 $\pm$ 0.05	1
I11x2x1A	11.00 $\pm$ 0.10	2.00 $\pm$ 0.05	1.00 $\pm$ 0.05	2
I11.3x2.1x1.2	11.30 $^{+0.00}_{-0.20}$	2.10 $^{+0.00}_{-0.10}$	1.20 $^{+0.00}_{-0.10}$	1
I11.3x2.2x1.3	11.30 $^{+0.00}_{-0.20}$	2.20 $^{+0.00}_{-0.10}$	1.30 $^{+0.00}_{-0.10}$	3
I29.2x12x5	29.20 $\pm$ 0.40	12.00 $\pm$ 0.30	5.00 $\pm$ 0.30	4
I31.2x9.6x4.6	31.20 $\pm$ 0.40	9.60 $\pm$ 0.30	4.60 $\pm$ 0.30	4
I43.5x16.2x8.8	43.50 $^{+0.10}_{-0.60}$	16.20 $\pm$ 0.40	8.80 $\pm$ 0.30	4
I50x12x3	50.00 $^{+0.20}_{-0.80}$	12.00 $\pm$ 0.20	3.00 $\pm$ 0.10	1

Remark: Customized dimensions are available.


## Type : I Cores

Ordering Code:


K081	I53.3*53.3*2.5
Material	Core Size
材質	品名

Shape:


Type:1

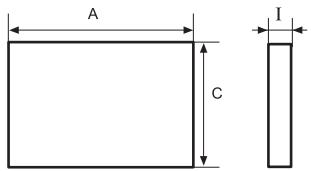


Type:2

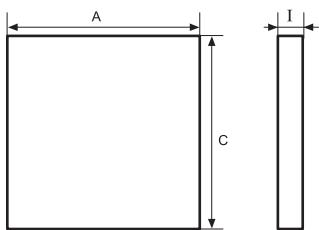


Type:3

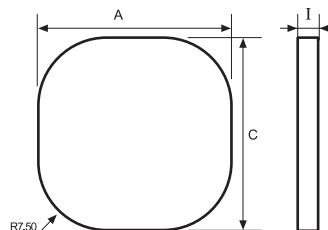


Type:4

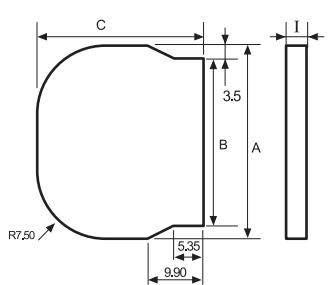

Type:5

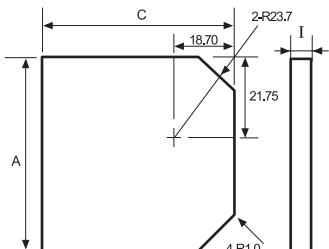

Type:6

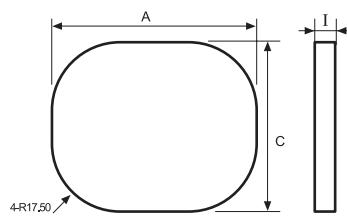

## DIMENSIONS

CORES	DIMENSIONS (mm)				Wt(g/pc)	Type
	A	B	C	I		
<b>I25x25x0.6</b>	25.00 ± 0.40	–	25.00 ± 0.40	0.60 ± 0.10	1.80	3
<b>I26.42x26.42x2.25</b>	26.42 ± 0.38	–	26.42 ± 0.38	2.25 ± 0.15	8.05	2
<b>I50x12x3</b>	50.00 ± 0.60	–	12.00 ± 0.30	3.00 ± 0.15	8.96	1
<b>I50x8x2.5</b>	50.00 ± 0.60	–	8.00 ± 0.25	3.00 ± 0.15	5.10	1
<b>I50x50x2.37</b>	50.00 ± 0.40	–	50.00 ± 0.40	2.37 ± 0.10	31.87	2
<b>I51.2x46.5x0.8</b>	51.20 ± 0.60	44.20 ± 0.50	46.50 ± 0.50	0.80 ± 0.10	9.01	4
<b>I53.3x53.3x2.5</b>	53.30 ± 0.70	–	53.30 ± 0.70	2.50 ± 0.15	36.50	2
<b>I54x46x0.8</b>	54.00 ± 0.50	–	46.50 ± 0.40	0.80 ± 0.10	10.00	5
<b>I59.5x52x2.5</b>	59.50 ± 0.50	–	52.00 ± 0.50	2.50 ± 0.20	36.10	6

Remark: Customized dimensions are available.

## Type : POT Cores


Ordering Code:

F52      POT5.35Ax3.8CH

---

Material 材質	Core Size 品名
----------------	-----------------

Shape:

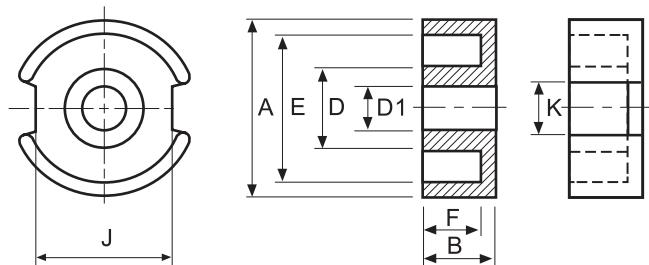

### DIMENSIONS

CORES	DIMENSIONS (mm)							
	A	B	D	E	F	J	K	D1
POT5.35Ax3.8CH	5.35 ± 0.15	1.90 ± 0.10	2.00 ± 0.15	4.35 ± 0.25	1.23 ± 0.10	3.10 ± 0.20	1.40 ± 0.20	0.95 ± 0.10
POT7.4Ax7CH	7.50 ± 0.20	3.50 ± 0.10	2.30 ± 0.15	5.75 ± 0.25	2.80 ± 0.10	4.00 ± 0.10	2.15 ± 0.20	1.25 ± 0.10

### EFFECTIVE PARAMETERS

CORES	EFFECTIVE PARAMETERS				
	C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
POT5.35Ax3.8CH	2.12	6.98	3.29	22.94	0.16
POT7.4Ax7CH	3.01	11.22	3.73	41.83	0.58


## Type : T Cores (EMI Suppression)

Ordering Code:


K081      T3.5\*1.6\*3.25  
 ——————  
 Material      Core Size  
 材質            品名

Shape:

Type:1

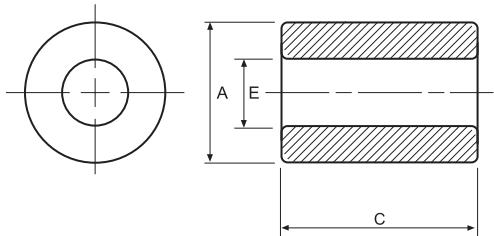

Type:2

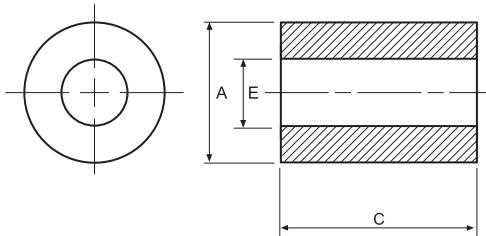

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			Impedance		Type
	A	E	C	25MHz (min)	100MHz (min)	
T3.5x1.6x3.25	3.50 ± 0.20	1.60 ± 0.15	3.25 ± 0.20	17	35	2
T4x2x3	4.00 ± 0.20	2.00 ± 0.10	3.00 ± 0.20	14	30	1
T5.84x3.05x1.52	5.84 ± 0.25	3.05 ± 0.15	1.52 ± 0.10	8	23	1
T6.35x3.18x6	6.35 ± 0.25	3.18 ± 0.20	6.00 ± 0.30	28	62	1
T7.6x3.6x4.2	7.60 ± 0.30	3.60 ± 0.20	4.20 ± 0.20	20	38	1
T8x4x3	8.00 ± 0.30	4.00 ± 0.15	3.00 ± 0.15	20	59	2
T9.52x4.8x3.18	9.52 ± 0.25	4.80 ± 0.20	3.18 ± 0.25	16	35	1
T10.5x5.5x5	10.50 ± 0.35	5.50 ± 0.20	5.00 ± 0.30	20	38	1
T12x6x4	12.00 ± 0.40	6.00 ± 0.20	4.00 ± 0.30	18	36	1
T12.7x7.92x6.35	12.70 ± 0.40	7.92 ± 0.25	6.35 ± 0.30	20	40	1
T13x7x7	13.00 ± 0.40	7.00 <sup>+0.40</sup> <sub>-0.00</sub>	7.00 ± 0.30	25	50	1
T14.27x6.35x5.08	14.27 ± 0.40	6.35 ± 0.25	5.08 ± 0.20	24	50	1
T16x9x4	16.00 ± 0.50	9.00 ± 0.30	4.00 ± 0.20	13	30	1
T17.42x9.52x12.7	17.42 ± 0.50	9.52 ± 0.30	12.70 ± 0.40	44	88	1
T18.5x10x5	18.50 ± 0.50	10.00 ± 0.30	5.00 ± 0.30	42	70	1
T20x10x5	20.00 ± 0.50	10.00 ± 0.30	5.00 ± 0.20	23	56	1
T25x15x12	25.00 ± 0.50	15.00 ± 0.30	12.00 ± 0.40	35	80	1
T31x19x22	31.00 ± 0.70	19.00 ± 0.50	22.00 ± 0.60	63	117	1
T38.1x19.05x12.7	38.10 ± 0.70	19.05 ± 0.50	12.70 ± 0.40	48	87	1


Remark: Customized dimensions are available.

## Type : T Cores

Ordering Code:

K081	T2.03*1.27*0.76	HP	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

Shape:

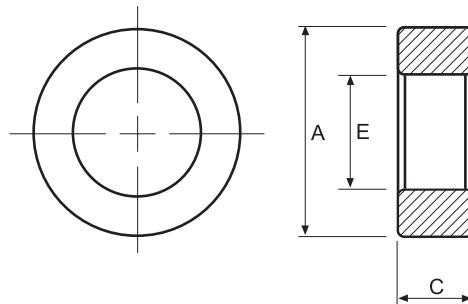

C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free

HP : Parylene Coating of Halogen-Free

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	PARYLENE COATING DIMENSIONS (mm)			C <sub>i</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>T2.03x1x0.76</b>	2.03 ± 0.15	1.00 ± 0.15	0.76 ± 0.15	11.68	4.38	0.38	1.65	0.009
	2.03 ± 0.15	1.00 ± 0.15	0.76 ± 0.15					
<b>T2.03x1.1x0.64</b>	2.03 ± 0.15	1.10 ± 0.15	0.64 ± 0.15	16.02	4.62	0.29	1.33	0.007
	2.03 ± 0.15	1.10 ± 0.15	0.64 ± 0.15					
<b>T2.03x1.27x0.76</b>	2.03 ± 0.15	1.27 ± 0.15	0.76 ± 0.15	17.63	5.00	0.28	1.42	0.007
	2.03 ± 0.15	1.27 ± 0.15	0.76 ± 0.15					
<b>T2.5x1.5x1.3</b>	2.50 ± 0.15	1.50 ± 0.15	1.30 ± 0.15	9.46	6.02	0.64	3.83	0.020
	2.50 ± 0.15	1.50 ± 0.15	1.30 ± 0.15					
<b>T2.54x1.27x1.27</b>	2.54 ± 0.15	1.27 ± 0.15	1.27 ± 0.15	7.14	5.53	0.77	4.29	0.022
	2.54 ± 0.15	1.27 ± 0.15	1.27 ± 0.15					
<b>T3x1x3</b>	3.00 ± 0.20	1.00 ± 0.15	3.00 ± 0.20	1.90	5.17	2.72	14.06	0.100
	3.00 ± 0.20	1.00 ± 0.15	3.00 ± 0.20					
<b>T3.05x1.27x1.3</b>	3.05 ± 0.15	1.27 ± 0.15	1.30 ± 0.15	5.52	5.99	1.09	6.50	0.038
	3.05 ± 0.15	1.27 ± 0.15	1.30 ± 0.15					
<b>T3.05x1.5x2</b>	3.05 ± 0.15	1.50 ± 0.15	2.00 ± 0.15	4.43	6.58	1.49	9.78	0.053
	3.05 ± 0.15	1.50 ± 0.15	2.00 ± 0.15					
<b>T3.05x1.68x2.06</b>	3.05 ± 0.15	1.68 ± 0.15	2.06 ± 0.15	5.11	7.01	1.37	9.60	0.048
	3.05 ± 0.15	1.68 ± 0.15	2.06 ± 0.15					
<b>T3.05x1.78x1.78</b>	3.05 ± 0.15	1.78 ± 0.15	1.78 ± 0.15	6.55	7.23	1.10	7.98	0.041
	3.05 ± 0.15	1.78 ± 0.15	1.78 ± 0.15					
<b>T3.3x1.2x1.6</b>	3.30 ± 0.15	1.20 ± 0.15	1.60 ± 0.15	3.88	5.99	1.54	9.25	0.060
	3.30 ± 0.15	1.20 ± 0.15	1.60 ± 0.15					
<b>T3.3x1.3x1.3</b>	3.30 ± 0.15	1.30 ± 0.15	1.30 ± 0.15	5.19	6.28	1.21	7.60	0.050
	3.30 ± 0.15	1.30 ± 0.15	1.30 ± 0.15					
<b>T3.43x1.27x3</b>	3.43 ± 0.15	1.27 ± 0.15	3.00 ± 0.15	2.11	6.29	2.99	18.80	0.114
	3.43 ± 0.15	1.27 ± 0.15	3.00 ± 0.15					
<b>T3.43x1.78x2.03</b>	3.43 ± 0.15	1.78 ± 0.15	2.03 ± 0.15	4.71	7.63	1.62	12.36	0.071
	3.43 ± 0.15	1.78 ± 0.15	2.03 ± 0.15					
<b>T3.5x1.5x3</b>	3.50 ± 0.15	1.50 ± 0.15	3.00 ± 0.15	2.47	6.99	2.83	19.75	0.115
	3.50 ± 0.15	1.50 ± 0.15	3.00 ± 0.15					
<b>T3.5x1.78x1</b>	3.50 ± 0.15	1.78 ± 0.15	1.00 ± 0.15	9.38	7.69	0.82	6.31	0.037
	3.50 ± 0.15	1.78 ± 0.15	1.00 ± 0.15					
<b>T3.5x1.8x1.3</b>	3.45 ± 0.15	1.75 ± 0.15	1.30 ± 0.15	7.27	7.74	1.07	8.25	0.044
	3.45 ± 0.15	1.75 ± 0.15	1.30 ± 0.15					
<b>T3.94x2.24x1.27</b>	3.94 ± 0.15	2.24 ± 0.15	1.27 ± 0.15	8.76	9.21	1.05	9.68	0.050
	3.94 ± 0.15	2.24 ± 0.15	1.27 ± 0.15					
<b>T4x2x2</b>	4.00 ± 0.20	2.00 ± 0.20	2.00 ± 0.20	4.53	8.71	1.92	16.74	0.099
	4.00 ± 0.20	2.00 ± 0.20	2.00 ± 0.20					
<b>T4.1x2.9x0.4</b>	4.10 ± 0.20	2.90 ± 0.20	0.40 ± 0.15	45.49	10.78	0.24	2.55	0.010
	4.10 ± 0.20	2.90 ± 0.20	0.40 ± 0.15					
<b>T4.2x1.5x2</b>	4.20 ± 0.20	1.50 ± 0.20	2.00 ± 0.20	3.05	7.54	2.47	18.62	0.126
	4.20 ± 0.20	1.50 ± 0.20	2.00 ± 0.20					
<b>T4.3x2.8x2.5</b>	4.30 ± 0.20	2.80 ± 0.20	2.50 ± 0.20	5.86	10.82	1.85	19.98	0.110
	4.30 ± 0.20	2.80 ± 0.20	2.50 ± 0.20					
<b>T4.83x2.29x2.54</b>	4.83 ± 0.12	2.29 ± 0.15	2.54 ± 0.12	3.31	10.21	3.08	31.45	0.190
	4.83 ± 0.12	2.29 ± 0.15	2.54 ± 0.12					
<b>T4.95x2.97x2.79</b>	4.95 ± 0.20	2.97 ± 0.20	2.79 ± 0.20	4.51	11.92	2.70	32.21	0.180
	4.95 ± 0.20	2.97 ± 0.20	2.79 ± 0.20					

## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )								
	L2	K081	K10	K12	K15	K20	B30	B45	B60
T2.03x1x0.76		80			155				
T2.03x1.1x0.64									
T2.03x1.27x0.76		55							
T2.5x1.5x1.3		105		156					
T2.54x1.27x1.27		144			265				
T3x1x3						100			
T3.05x1.27x1.3		170							
T3.05x1.5x2			272						
T3.05x1.68x2.06									
T3.05x1.78x1.78		149							
T3.3x1.2x1.6	18								
T3.3x1.3x1.3	14								
T3.43x1.27x3			550						
T3.43x1.78x2.03		213							
T3.5x1.5x3		385			720				
T3.5x1.78x1		100							
T3.5x1.8x1.3		135	170						
T3.94x2.24x1.27			140		210				
T4x2x2		210	270	320	400				
T4.1x2.9x0.4									16.5
T4.2x1.5x2	24								
T4.3x2.8x2.5		170	210		320				
T4.83x2.29x2.54		300	380		570				
T4.95x2.97x2.79								125	167

Remark:

1. AL Value Testing Condition : 100kHz, 100mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.

2. Coating Material

(1) Toroid Size T8 and Below:clear polyimide coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.

(2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.

3. Customized dimensions are available.

## Type : T Cores

Ordering Code:


K081	T5*3*2	HP	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

C : Epoxy Coating of Halogen-Free

HP : Parylene Coating of Halogen-Free

HUC : Epoxy Coating of UL & Halogen-Free

Shape:

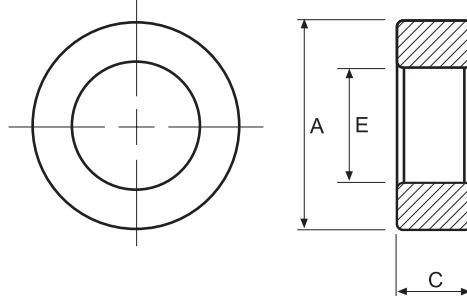

## DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	EPOXY COATING DIMENSIONS (mm)			C <sub>i</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>T5x3x2</b>	5.00 ± 0.15	3.00 ± 0.15	2.00 ± 0.15	6.15	12.04	1.96	23.56	0.130
	5.00 ± 0.15*	3.00 ± 0.15*	2.00 ± 0.15*					
<b>T5.38x2.97x2.79</b>	5.38 ± 0.10	2.97 ± 0.10	2.79 ± 0.10	3.79	12.38	3.26	40.40	0.220
	5.38 ± 0.10*	2.97 ± 0.10*	2.79 ± 0.10*					
<b>T5.84x3.05x1.52</b>	5.84 ± 0.15	3.05 ± 0.15	1.52 ± 0.15	6.36	13.03	2.05	26.67	0.146
	5.84 ± 0.15*	3.05 ± 0.15*	1.52 ± 0.15*					
<b>T6x3x2</b>	6.00 ± 0.30	3.00 ± 0.30	2.00 ± 0.20	4.53	13.07	2.88	37.66	0.21
	6.00 ± 0.30*	3.00 ± 0.30*	2.00 ± 0.20*					
<b>T6.22x2.8x3.38</b>	6.22 ± 0.30	2.80 ± 0.30	3.88 ± 0.20	2.33	12.77	5.48	70.01	0.42
	6.22 ± 0.30*	2.80 ± 0.30*	3.88 ± 0.20*					
<b>T7x4x4</b>	7.00 ± 0.30	4.00 ± 0.20	4.00 ± 0.20	2.81	16.41	5.85	95.92	0.55
	7.00 ± 0.30*	4.00 ± 0.20*	4.00 ± 0.20*					
<b>T7.62x3.18x3.18</b>	7.62 ± 0.15	3.18 ± 0.15	3.18 ± 0.15	2.26	14.98	6.63	99.29	0.58
	7.62 ± 0.15*	3.18 ± 0.15*	3.18 ± 0.15*					
<b>T8x4x4</b>	8.00 ± 0.30	4.00 ± 0.20	4.00 ± 0.30	2.27	17.42	7.69	133.92	0.77
	8.90max	3.20min	4.90max					
<b>T8.85x5.25x2</b>	8.85 ± 0.20	5.25 ± 0.20	2.00 ± 0.10	3.33	21.17	3.52	71.01	0.42
	9.65max	4.45min	2.70max					
<b>T9x5x3</b>	9.10 ± 0.30	5.10 ± 0.30	3.00 ± 0.30	3.56	20.77	5.83	121.12	0.68
	10.00max	4.20min	3.90max					
<b>T10x5.5x5</b>	10.10 ± 0.20	5.60 ± 0.20	5.00 ± 0.20	2.10	22.96	10.92	250.69	1.37
	10.90max	4.80min	5.80max					
<b>T10x6x3.1</b>	10.10 ± 0.30	6.10 ± 0.30	3.10 ± 0.30	3.97	24.07	6.07	146.04	0.80
	11.00max	5.20min	4.00max					
<b>T10x6x4</b>	10.10 ± 0.30	6.10 ± 0.30	4.00 ± 0.30	3.08	24.07	7.83	188.44	1.03
	11.00max	5.20min	4.90max					
<b>T12.5x7.5x5</b>	12.50 ± 0.30	7.50 ± 0.30	5.00 ± 0.30	2.46	30.09	12.23	368.05	2.05
	13.40max	6.60min	5.90max					
<b>T12.7x7.14x6.35</b>	12.70 ± 0.40	7.14 ± 0.30	6.35 ± 0.30	1.72	29.51	17.17	506.72	2.83
	13.70max	6.24min	7.25max					
<b>T12.7x7.92x4.7</b>	12.70 ± 0.40	7.92 ± 0.30	4.70 ± 0.30	2.83	31.22	11.03	344.21	1.71
	13.70max	7.02min	5.60max					
<b>T12.85x7.35x5</b>	12.85 ± 0.40	7.35 ± 0.30	5.00 ± 0.30	2.25	30.14	13.40	403.78	2.27
	13.85max	6.45min	5.90max					
<b>T13x7x3</b>	13.00 ± 0.30	7.00 ± 0.30	3.00 ± 0.30	3.38	29.50	8.72	257.24	1.47
	13.90max	6.10min	3.90max					
<b>T14x8x7</b>	14.00 ± 0.40	8.00 ± 0.30	7.00 ± 0.30	1.60	32.82	20.46	671.46	3.45
	15.00max	7.10min	7.90max					
<b>T14x9x7</b>	14.00 ± 0.40	9.00 ± 0.30	7.00 ± 0.30	2.03	34.98	17.22	602.27	3.22
	15.00max	8.10min	7.90max					
<b>T14.48x8.51x5.51</b>	14.48 ± 0.25	8.51 ± 0.25	5.51 ± 0.13	2.14	34.45	16.07	553.61	3.08
	15.48max	7.51min	6.51max					
<b>T16x9x5</b>	16.00 ± 0.40	9.50 ± 0.40	5.00 ± 0.30	2.18	37.18	17.03	633.06	3.50
	17.00max	8.50min	5.90max					
<b>T16x10x10</b>	16.00 ± 0.30	10.00 ± 0.30	10.00 ± 0.30	1.34	39.37	29.45	1159.14	6.37
	16.90max	9.10min	10.10max					
<b>T16x12x7</b>	16.00 ± 0.30	12.00 ± 0.30	7.00 ± 0.30	3.12	43.38	13.90	603.17	3.04
	16.90max	11.10min	7.90max					
<b>T16.25x7.9x14.3</b>	16.25 ± 0.40	7.90 ± 0.40	14.30 ± 0.30	0.61	34.84	57.18	1991.89	11.54
	17.25max	6.90min	15.20max					

Remark: \*Parylene Coating dimensions.



## ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )								
	L2	K081	K10	K12	K15	K20	B30	B45	B60
T5x3x2		160	200						
T5.38x2.97x2.79		255	320	385			95	145	190
T5.84x3.05x1.52			95						
T6x3x2		210		330	410		80	120	160
T6.22x2.8x3.38		410	540		800				
T7x4x4					654				
T7.62x3.18x3.18		420							
T8x4x4		426	533		800			240	
T8.85x5.25x2		160					62		
T9x5x3		270	340	405	530			150	200
T10x5.5x5		458	573	688			172	258	344
T10x6x3.1			310		465				
T10x6x4		315			600				
T12.5x7.5x5		400	500	600					
T12.7x7.14x6.35		580	710		1000	1460			
T12.7x7.92x4.7		348	440	530	666				
T12.85x7.35x5		440	559		830				
T13x7x3		300	370						220
T14x8x7		611	763	916		1560		350	
T14x9x7		487							
T14.48x8.51x5.51		468							
T16x9x5		405	510					250	
T16x10x10		750	940		1400				
T16x12x7		320	400		600				
T16.25x7.9x14.3		1583	1978	2374			593	890	1187

Remark:

1. AL Value Testing Condition : 100kHz, 100mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.

2. Coating Material

(1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.

(2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.

3. Customized dimensions are available.


## Type : T Cores

Ordering Code:

K081	T18*12*6	C	G□
Material 材質	Core Size 品名	Coating 塗裝	Gapped AL Value

C : Epoxy Coating of Halogen-Free      HUC : Epoxy Coating of UL & Halogen-Free  
 HP : Parylene Coating of Halogen-Free

Shape:

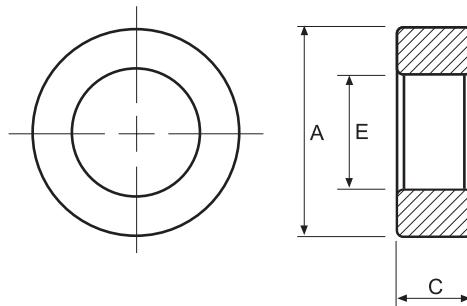

### DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			EFFECTIVE PARAMETERS				
	EPOXY COATING DIMENSIONS (mm)			C <sub>1</sub> (mm <sup>-1</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)
<b>T18x10x6</b>	18.00 ± 0.30	10.00 ± 0.30	6.00 ± 0.30	1.78	41.53	23.32	968.48	5.49
	18.90max	9.10min	6.90max					
<b>T18x12x6</b>	18.00 ± 0.30	11.90 ± 0.20	6.00 ± 0.20	2.58	45.86	17.76	814.21	4.38
	18.90max	11.10min	6.80max					
<b>T19x11x5</b>	19.00 ± 0.30	11.00 ± 0.30	5.00 ± 0.30	2.30	44.86	19.51	875.22	4.91
	19.90max	10.10min	5.90max					
<b>T20x10x7</b>	20.00 ± 0.40	10.00 ± 0.40	7.00 ± 0.30	1.29	43.55	33.63	1464.72	8.25
	21.00max	9.00min	7.90max					
<b>T20x10x10</b>	20.00 ± 0.40	10.00 ± 0.40	10.00 ± 0.30	0.91	43.55	48.05	2092.46	12.02
	21.00max	9.00min	10.90max					
<b>T20x12x8</b>	20.00 ± 0.40	12.00 ± 0.40	8.00 ± 0.30	1.54	48.12	31.31	1506.64	8.36
	21.00max	11.00min	8.90max					
<b>T22x14x12.7</b>	22.00 ± 0.40	14.00 ± 0.40	12.70 ± 0.30	1.39	52.29	37.70	1971.31	15.13
	23.00max	13.00min	13.60max					
<b>T22.1x13.72x6.35</b>	22.10 ± 0.40	13.72 ± 0.40	6.35 ± 0.30	2.08	54.19	26.11	1414.81	7.47
	23.10max	12.72min	7.25max					
<b>T23x14x7</b>	23.00 ± 0.40	14.00 ± 0.40	7.00 ± 0.30	1.81	55.80	30.86	1722.01	9.05
	24.00max	13.00min	7.90max					
<b>T24x11x14</b>	24.00 ± 0.50	11.00 ± 0.40	14.00 ± 0.50	0.65	47.91	73.99	3544.62	25.50
	25.10max	10.00min	15.10max					
<b>T24x18x10</b>	24.00 ± 0.40	18.00 ± 0.40	10.00 ± 0.30	2.18	65.07	29.79	1938.76	9.94
	25.00max	17.00min	10.90max					
<b>T25x15x13</b>	25.00 ± 0.40	15.00 ± 0.40	13.00 ± 0.30	0.95	60.18	63.60	3827.75	21.00
	26.00max	14.00min	13.90max					
<b>T28x16x13</b>	28.00 ± 0.50	16.00 ± 0.40	13.00 ± 0.30	0.86	65.64	76.00	4988.00	27.91
	29.10max	15.00min	14.00max					
<b>T29x19x13.8</b>	29.00 ± 0.50	19.00 ± 0.35	13.80 ± 0.30	1.08	73.20	67.98	4976.02	27.73
	30.10max	18.05min	14.70max					
<b>T31x19x16</b>	31.00 ± 0.50	19.00 ± 0.50	16.00 ± 0.40	0.80	75.49	94.11	7103.86	38.43
	32.10max	17.90min	17.00max					
<b>T36x23x15</b>	36.00 ± 0.60	23.45 ± 0.50	15.00 ± 0.40	0.93	89.65	95.89	8595.89	46.06
	37.20max	22.35min	16.00max					
<b>T37x22x15</b>	37.00 ± 0.60	22.00 ± 0.50	15.00 ± 0.40	0.81	88.63	110.00	9749.34	53.15
	38.20max	20.90min	16.00max					
<b>T38x19x13</b>	38.10 ± 0.60	19.05 ± 0.60	13.00 ± 0.30	0.70	82.75	118.67	9819.89	56.37
	39.30max	17.85min	13.90max					
<b>T47x27x15</b>	47.00 ± 0.80	27.00 ± 0.60	15.00 ± 0.40	0.76	110.49	146.22	16156.02	83.89
	48.40max	25.80min	16.00max					
<b>T48x30x15</b>	48.00 ± 0.80	30.00 ± 0.80	15.00 ± 0.40	0.89	118.12	132.54	15655.62	86.01
	49.40max	28.60min	16.00max					
<b>T49.1x33.8x15.9</b>	49.10 ± 1.00	33.80 ± 1.00	15.90 ± 0.40	1.06	127.24	120.23	15298.45	80.83
	50.70max	32.20min	16.90max					
<b>T63x38x26</b>	62.80 ± 1.60	37.60 ± 1.20	26.00 ± 0.60	0.48	152.09	318.17	48389.39	262.82
	65.00max	35.80min	27.20max					

## ■ ELECTRICAL CHARACTERISTICS

CORES	AL ± 25% (nH/N <sup>2</sup> )								
	L2	K081	K10	K12	K15	K20	B30	B45	B60
T18x10x6		560							
T18x12x6		380	480		720				
T19x11x5		430							
T20x10x7		746	970						
T20x10x10		1100	1380		2050				
T20x12x8		650							
T22x14x12.7		900	1690						
T22.1x13.72x6.35		480	600		900				
T23x14x7		550	680						408
T24x11x14		1664	2081	2497			624	963	1248
T24x18x10		450	570					257	
T25x15x13		1040	1320						
T28x16x13		1164	1455		2180				
T29x19x13.8		920	1150						
T31x19x16		1230							
T36x23x15		1057			1920				
T37x22x15		1250			2288				
T38x19x13		1387							
T47x27x15		1297	1660		2500				
T48x30x15		1100							
T49.1x33.8x15.9			1180		1800				
T63x38x26		1980							

Remark:


1. AL Value Testing Condition : 100kHz, 100mV, 1Ts. If testing condition is different from ACME's, please specify upon request & ordering.
2. Coating Material
  - (1) Toroid Size T8 and Below:clear parylene coating, breakdown voltage:1000Vdc, coating thickness : 0.05mm max.
  - (2) Toroid Size T9 and Above:green epoxy coating, breakdown voltage:1500Vdc, coating thickness : 0.6mm max.
3. Customized dimensions are available.

## Type : RH Cores

Ordering Code:


K08      RH3\*1.2\*3.5  
 Material      Core Size  
 材質      品名

Type:2

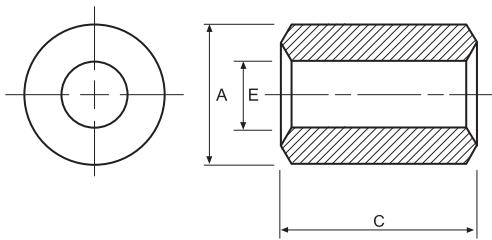


Shape:

Type:1

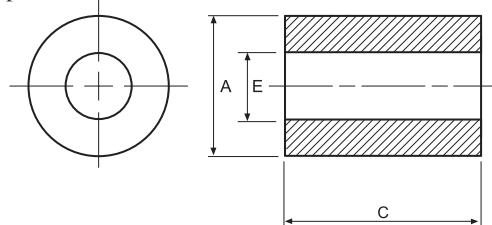

Type:3

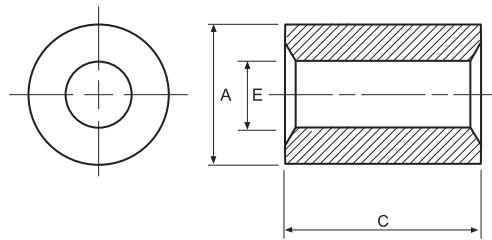

## DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			Impedance		Type
	A	E	C	25MHz (min)	100MHz (min)	
<b>RH2.03x0.89x2.67</b>	2.03 ± 0.10	2.67 ± 0.25	0.89 ± 0.07	-	-	2
<b>RH3x1.2x3.5</b>	3.00 ± 0.15	1.20 ± 0.15	3.50 ± 0.20	-	-	1
<b>RH3.5x0.9x4.5</b>	3.50 ± 0.20	0.90 ± 0.15	4.50 ± 0.20	-	-	3
<b>RH3.5x1.2x4</b>	3.50 ± 0.20	1.20 ± 0.15	4.00 ± 0.20	26	47	1
<b>RH3.5x1.3x9</b>	3.50 ± 0.15	1.30 ± 0.15	9.00 ± 0.20	-	-	2
<b>RH3.5x1.5x5</b>	3.50 ± 0.15	1.50 ± 0.15	5.00 ± 0.20	-	-	1
<b>RH3.5x1.6x5</b>	3.50 ± 0.20	1.60 ± 0.10	5.00 ± 0.20	23	44	1
<b>RH4x2x6</b>	4.00 ± 0.20	2.00 ± 0.15	6.00 ± 0.30	24	41	2
<b>RH5x1.5x6.35</b>	5.00 ± 0.20	1.50 ± 0.15	6.35 ± 0.25	43	71	2
<b>RH5.8x3.8x10</b>	5.80 ± 0.30	3.80 ± 0.20	10.00 ± 0.30	26	59	2
<b>RH6.35x3.18x15.9</b>	6.35 ± 0.15	3.18 ± 0.20	15.90 ± 0.50	64	115	2
<b>RH7.8x4x12.7</b>	7.80 ± 0.25	4.00 ± 0.20	12.70 ± 0.40	45	100	2
<b>RH9x4.5x10</b>	9.00 ± 0.25	4.50 ± 0.15	10.00 ± 0.70	36	65	2
<b>RH9.52x5.08x19.05</b>	9.52 ± 0.30	5.08 ± 0.20	19.05 ± 0.70	65	117	2
<b>RH10.5x5.5x20</b>	10.50 ± 0.35	5.50 ± 0.20	20.00 ± 0.50	75	140	2
<b>RH12x5.6x30</b>	12.00 ± 0.40	5.60 ± 0.20	30.00 ± 0.70	130	213	2
<b>RH12x6x35</b>	12.00 ± 0.40	6.00 ± 0.40	35.00 ± 1.20	-	-	2
<b>RH12.6x9.6x15.8</b>	12.60 ± 0.50	9.60 ± 0.40	15.80 ± 0.60	-	-	2
<b>RH12.7x7.92x12.7</b>	12.70 ± 0.40	7.92 ± 0.25	12.70 ± 0.40	35	75	2
<b>RH12.7x8.55x35</b>	12.70 ± 0.50	8.55 ± 0.30	35.00 ± 0.50	-	-	2
<b>RH14.27x6.35x28.57</b>	14.27 ± 0.40	6.35 ± 0.20	28.57 ± 0.70	120	200	2
<b>RH15.88x7.87x28.57</b>	15.88 ± 0.50	7.87 ± 0.25	28.57 ± 0.70	110	192	2
<b>RH16x9x28</b>	16.00 ± 0.50	9.00 ± 0.30	28.00 ± 0.70	100	160	2
<b>RH17.42x9.52x28.57</b>	17.42 ± 0.50	9.52 ± 0.30	28.57 ± 0.70	94	155	2
<b>RH18.5x10x28.57</b>	18.50 ± 0.50	10.00 ± 0.30	28.57 ± 0.70	100	175	2
<b>RH26x13x28.57</b>	26.00 ± 0.50	13.00 ± 0.30	28.57 ± 0.80	113	193	2

Remark: Customized dimensions are available.



## Introduction



ACME Electronics (Guangzhou) Co., Ltd., Guangdong province, China



ACME Electronics (Kunshan) Co., Ltd., Jiang-Su Province, China

### Our Commitment

- Emphasis on Customer Service
- Emphasis on Manufacturing Quality
- Emphasis on Competitive Pricing
- Emphasis on Timely Deliveries
- Mutual Beneficial Customer Partnerships
- Maintain IATF 16949, ISO 9001, ISO 14001 and ISO 50001



ACME Ferrite Product SDN. BHD.,Ipoh,Malaysia

### Our Quality Policy

- Amazing Customers with Quality Service
- Breakthrough, Innovation and Excellence
- Coexistence and Co-prosperity Forever



ACME Electronics Corporation  
越峯電子材料股份有限公司

**總公司：**

台北市114內湖區基湖路39號8樓  
Tel : +886-2-26503337  
Fax : +886-2-26599511

**Head Office:**

8th Floor, No.39, Ji-Hu Rd., Nei-Hu Dist., Taipei, 114, Taiwan  
Tel : +886-2-26503337  
Fax : +886-2-26599511

**桃園廠：**

桃園市328觀音工業區國建二路2號  
Tel : +886-3-4837238  
Fax : +886-3-4837239

**Taoyuan Factory:**

No.2, Kuo-Chien 2nd Rd., Kuan-Yin Industrial District,  
Taoyuan City, 328, Taiwan  
Tel : +886-3-4837238  
Fax : +886-3-4837239

**越峰電子（廣州）有限公司：**

中國廣東省廣州市增城區增江街府前路1號  
郵政編號:511300  
Tel : +86-20-32851888  
Fax : +86-20-32851666

**ACME Electronics (Guangzhou) Co., Ltd:**

No. 1, Fuqian Road, Zengjiang Street ,Zengcheng District Guangzhou  
City,511300, Guangdong Province, China  
Tel : +86-20-32851888  
Fax : +86-20-32851666

**越峰電子（昆山）有限公司：**

中國江蘇省昆山市黃浦江北路533號  
郵政編號:215337  
Tel : +86-512-57932888  
Fax : +86-512-57664667

**ACME Electronics (Kunshan) Co., Ltd:**

No.533 Huangpujiang North Rd., Kunshan City,  
215337, Jiang-Su Province, China  
Tel : +86-512-57932888  
Fax : +86-512-57664667

**ACME Ferrite Products Sdn. Bhd.**

Plot 15, Jalan Industri 6  
Kawasan Perindustrian Jelapang II(ZPB)  
Jelapang, 30020, Ipoh,  
Perak, Malaysia  
Tel : +605-5269149, 5269151, 5269152  
Fax : +605-5269296

**ACME Ferrite Products Sdn. Bhd.**

Plot 15, Jalan Industri 6  
Kawasan Perindustrian Jelapang II(ZPB)  
Jelapang, 30020, Ipoh,  
Perak, Malaysia  
Tel : +605-5269149, 5269151, 5269152  
Fax : +605-5269296