


Type : R Cores

Ordering Code:


P4 Material 材質	R8*22 Core Size 品名
--	--

Shape:

Type:1

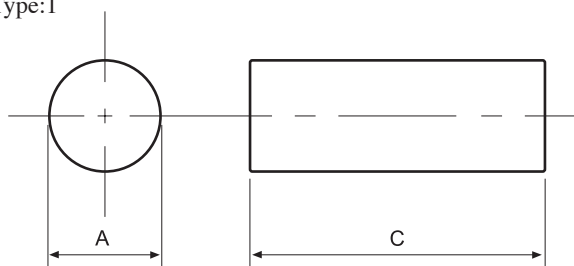

Type:2

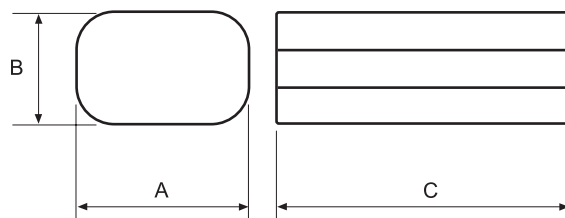


■ DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			Wt(g/set)	Type
	A	B	C		
R1.16x7.1	1.16 ± 0.08	—	7.10 ± 0.10	0.04	1
R1.7x18	1.70 ± 0.15	—	18.00 ± 0.50	0.18	1
R2.5x18	2.50 ± 0.20	—	18.00 ± 0.50	0.40	1
R3x19	3.00 ± 0.20	—	19.00 ± 0.20	0.65	1
R3.5x5.4	3.50 ± 0.10	—	5.40 ^{+0.10} _{-0.05}	0.21	1
R4x5	4.00 ± 0.10	—	5.00 ^{+0.10} _{-0.05}	0.30	1
R4.2x6.1	4.20 ± 0.10	—	6.10 ± 0.10	0.80	1
R4.3x7	4.30 ± 0.10	—	7.00 ± 0.10	0.64	1
R4.5x5.8	4.50 ± 0.10	—	5.80 ± 0.10	0.50	1
R4.5x22	4.50 ± 0.20	—	22.00 ± 0.45	1.69	1
R4.7x4.3	4.70 ± 0.10	—	4.30 ± 0.10	0.36	4
R5x3.6x8	5.00 ± 0.15	3.60 ± 0.15	8.00 ± 0.15	0.50	2
R5x7	5.00 ± 0.10	—	7.00 ± 0.10	0.51	1
R5Bx30	5.00 ^{+0.00} _{-0.30}	—	30.00 ± 1.00	2.63	1
R5.5x7.9	5.50 ± 0.10	—	7.90 ± 0.10	0.93	1
R5.8x5.2	5.80 ± 0.10	—	5.20 ± 0.10	0.65	1
R5.9x5.8	5.90 ± 0.10	—	5.80 ^{+0.00} _{-0.10}	0.75	1
R6x15	6.00 ± 0.15	—	15.00 ± 0.20	4.06	1
R6.35Ax22	6.35 ± 0.20	—	22.20 ± 0.50	3.31	1
R6.5x8.2	6.50 ± 0.15	—	8.20 ± 0.20	1.29	1
R6.65x30	6.65 ± 0.15	—	30.00 ± 0.60	5.07	1

Remark:

1. Black epoxy coating, breakdown voltage : 500vdc min 3sec 0.5mA.
2. Customized dimensions are available.

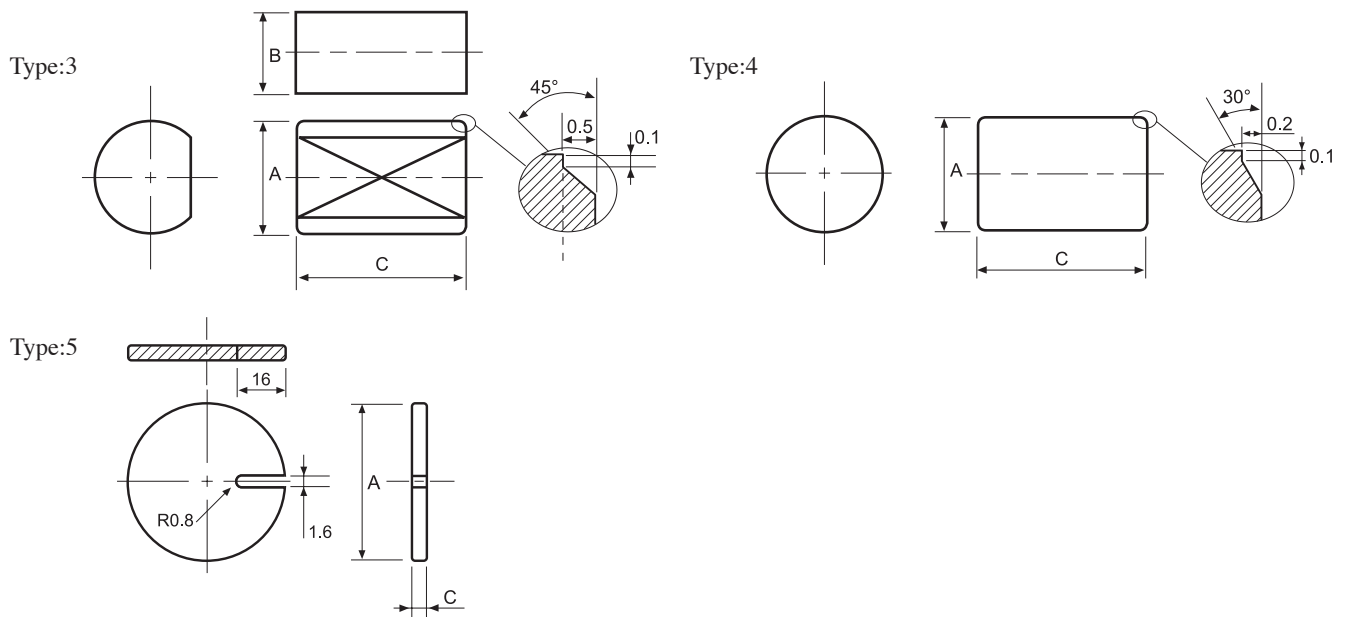

■ DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			Wt(g/set)	Type
	A	B	C		
R7x7.6	7.00 ± 0.15	—	7.60 ± 0.10	1.40	1
R7.1x1.0	7.10 ± 0.15	—	1.00 ± 0.08	0.19	1
R7.5x20	7.60 ± 0.10	—	19.85 ± 0.40	4.50	1
R7.85x25	7.85 ^{+0.00} _{-0.40}	—	25.00 ± 0.80	5.46	1
R8x22	8.00 ± 0.20	—	22.00 ± 0.60	5.20	1
R8x25	8.00 ± 0.60	—	25.00 ± 0.60	6.03	1
R8Dx25	7.85 ± 0.15	—	25.00 ± 0.80	5.74	1
R9.4x8	9.40 ± 0.20	—	8.00 ± 0.20	2.63	1
R10x60	10.00 ± 0.20	—	60.00 ± 0.50	22.38	1
R12x32	12.00 ± 0.30	11.00 ± 0.30	32.00 ± 1.00	16.00	3
R12Dx3.5	12.00 ± 0.20	—	3.50 ± 0.10	1.90	1
R12.6x7.75	12.60 ± 0.20	—	7.75 ± 0.20	4.64	4
R13.2x5	13.20 ± 0.20	—	5.00 ± 0.10	3.32	1
R14x0.8	14.00 ± 0.20	—	0.80 ± 0.10	0.59	1
R14.35x5	14.35 ± 0.25	—	5.00 ± 0.10	3.88	1
R15x1.9	15.00 ± 0.20	—	1.90 ± 0.05	1.63	1
R16.5x2.1	16.50 ± 0.25	—	2.10 ± 0.20	2.17	1
R20x4	20.00 ± 0.35	—	4.00 ± 0.35	6.03	1
R23x1.0	23.00 ± 0.35	—	1.00 ± 0.10	2.01	1
R29x17.4	29.00 ± 0.40	—	17.40 ± 0.30	54.30	4
R30x40	30.00 ± 0.45	—	40.00 ± 0.50	137.20	4
R50x1	50.00 ± 0.70	—	1.00 ± 0.10	9.72	1
R50Ax1.2	50.00 ± 0.75	—	1.20 ± 0.15	11.22	5

Remark:

1. Black epoxy coating, breakdown voltage : 500vdc min 3sec 0.5mA.
2. Customized dimensions are available.