


Type : RH Cores

Ordering Code:


K08	RH3*1.2*3.5
Material	Core Size
材質	品名

Shape:


Type:1

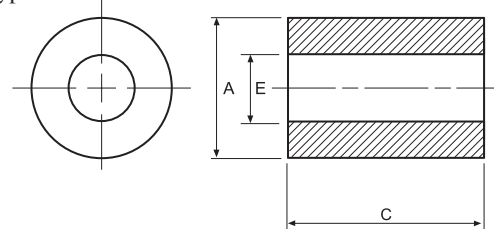

Type:2

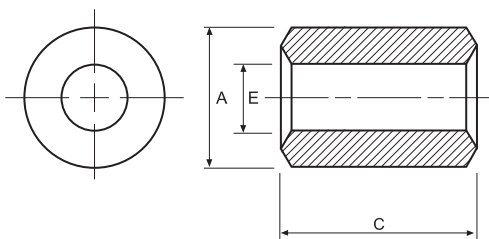

Type:3

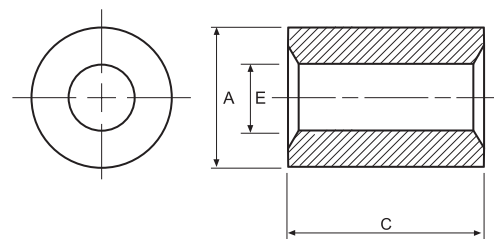

■ DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			Impedance		Type
	A	E	C	25MHz (min)	100MHz (min)	
RH2.03x0.89x2.67	2.03 ± 0.10	2.67 ± 0.25	0.89 ± 0.07	—	—	2
RH3x1.2x3.5	3.00 ± 0.15	1.20 ± 0.15	3.50 ± 0.20	—	—	1
RH3.5x0.9x4.5	3.50 ± 0.20	0.90 ± 0.15	4.50 ± 0.20	—	—	3
RH3.5x1.2x4	3.50 ± 0.20	1.20 ± 0.15	4.00 ± 0.20	26	47	1
RH3.5x1.3x9	3.50 ± 0.15	1.30 ± 0.15	9.00 ± 0.20	—	—	2
RH3.5x1.5x5	3.50 ± 0.15	1.50 ± 0.15	5.00 ± 0.20	—	—	1
RH3.5x1.6x5	3.50 ± 0.20	1.60 ± 0.10	5.00 ± 0.20	23	44	1
RH4x2x6	4.00 ± 0.20	2.00 ± 0.15	6.00 ± 0.30	24	41	2
RH5x1.5x6.35	5.00 ± 0.20	1.50 ± 0.15	6.35 ± 0.25	43	71	2
RH5.8x3.8x10	5.80 ± 0.30	3.80 ± 0.20	10.00 ± 0.30	26	59	2
RH6.35x3.18x15.9	6.35 ± 0.15	3.18 ± 0.20	15.90 ± 0.50	64	115	2
RH7.8x4x12.7	7.80 ± 0.25	4.00 ± 0.20	12.70 ± 0.40	45	100	2
RH9x4.5x10	9.00 ± 0.25	4.50 ± 0.15	10.00 ± 0.70	36	65	2
RH9.52x5.08x19.05	9.52 ± 0.30	5.08 ± 0.20	19.05 ± 0.70	65	117	2
RH10.5x5.5x20	10.50 ± 0.35	5.50 ± 0.20	20.00 ± 0.50	75	140	2
RH12x5.6x30	12.00 ± 0.40	5.60 ± 0.20	30.00 ± 0.70	130	213	2
RH12x6x35	12.00 ± 0.40	6.00 ± 0.40	35.00 ± 1.20	—	—	2
RH12.6x9.6x15.8	12.60 ± 0.50	9.60 ± 0.40	15.80 ± 0.60	—	—	2
RH12.7x7.92x12.7	12.70 ± 0.40	7.92 ± 0.25	12.70 ± 0.40	35	75	2
RH12.7x8.55x35	12.70 ± 0.30	8.55 ± 0.30	35.00 ± 0.50	—	—	2
RH14.27x6.35x28.57	14.27 ± 0.40	6.35 ± 0.20	28.57 ± 0.70	120	200	2
RH15.88x7.87x28.57	15.88 ± 0.50	7.87 ± 0.25	28.57 ± 0.70	110	192	2
RH16x9x28	16.00 ± 0.50	9.00 ± 0.30	28.00 ± 0.70	100	160	2
RH17.42x9.52x28.57	17.42 ± 0.50	9.52 ± 0.30	28.57 ± 0.70	94	155	2
RH18.5x10x28.57	18.50 ± 0.50	10.00 ± 0.30	28.57 ± 0.70	100	175	2
RH26x13x28.57	26.00 ± 0.50	13.00 ± 0.30	28.57 ± 0.80	113	193	2

Remark: Customized dimensions are available.