


Type : SC Cores


Ordering Code: K081 SC8.4*8
Material 材質 Core Size 品名

Shape:


Type:1

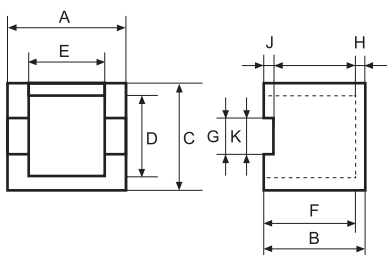


Type:2

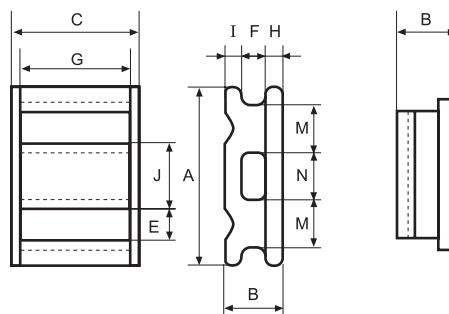


Type:3

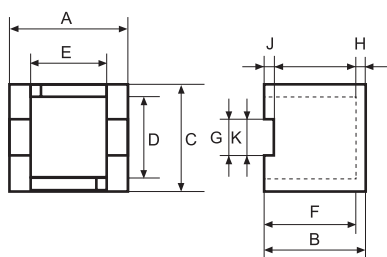

Type:4

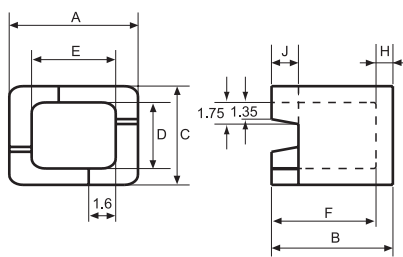

Type:5

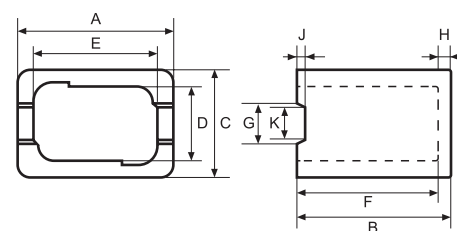

DIMENSIONS

CORES	DIMENSIONS (mm)						
	A	B	C	D	E	F	G
SC7.8	7.80 ± 0.20	7.00 ± 0.20	7.80 ± 0.20	5.60 ± 0.15	5.95 ± 0.15	5.90 ± 0.20	2.80 ± 0.20
SC8.4x8	8.40 ± 0.15	9.00 ± 0.15	8.00 ± 0.15	6.50 ± 0.15	4.90 ± 0.15	7.70 ± 0.15	0.80 ± 0.15
SC10x8x9.3	10.00 ± 0.20	9.30 ± 0.20	8.00 ± 0.20	5.35 ± 0.15	7.35 ± 0.15	8.30 ± 0.20	—
SC10.4x10x9	10.40 ± 0.20	9.00 ± 0.20	10.00 ± 0.20	7.20 ± 0.15	8.20 ± 0.15	8.00 ± 0.20	3.50 ± 0.20
SC11.3	11.30 ± 0.20	9.80 ± 0.15	11.30 ± 0.20	8.50 ± 0.15	7.80 ± 0.15	8.60 ± 0.15	3.90 ± 0.10
SC11.4A	11.40 ± 0.20	9.50 ± 0.20	11.40 ± 0.20	8.35 ± 0.15	8.90 ± 0.15	8.20 ± 0.20	4.00 ± 0.20
SC11.6x10	11.60 ± 0.20	10.00 ± 0.20	11.60 ± 0.20	9.20 ± 0.15	7.70 ± 0.15	8.65 ± 0.15	3.50 ± 0.15
SC12x10	12.00 ± 0.20	4.60 ± 0.15	10.00 ± 0.20	—	2.10 ± 0.15	1.80 ± 0.10	8.50 ± 0.20

EFFECTIVE PARAMETERS AND ELECTRICAL CHARACTERISTICS

CORES	DIMENSIONS (mm)					Wt(g/set)	Type
	H	J	K	M	N		
SC7.8	1.10 ± 0.20	0.22 ± 0.10	2.60 ± 0.20	—	—	1.46	5
SC8.4x8	1.30 ± 0.10	0.55 ± 0.10	—	—	—	1.86	1
SC10x8x9.3	2.00 ± 0.20	1.60 ± 0.15	—	—	—	1.91	4
SC10.4x10x9	1.00 ± 0.20	0.22 ± 0.10	3.30 ± 0.20	—	—	2.84	5
SC11.3	1.20 ± 0.10	0.80 ± 0.10	3.40 ± 0.10	—	—	2.90	1
SC11.4A	1.30 ± 0.20	0.27 ± 0.10	3.80 ± 0.20	—	—	3.25	5
SC11.6x10	1.35 ± 0.10	0.80 ± 0.10	3.40 ± 0.15	—	—	3.80	3
SC12x10	1.40 ± 0.10	4.30 ± 0.15	—	3.40 ± 0.15	3.00 ± 0.15	2.04	2

Remark: Customized dimensions are available.