


Type : T Cores (EMI Suppression)

Ordering Code:


K081	T3.5*1.6*3.25
Material	Core Size
材質	品名

Shape:

Type:1

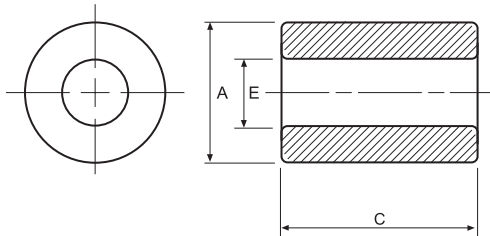

Type:2

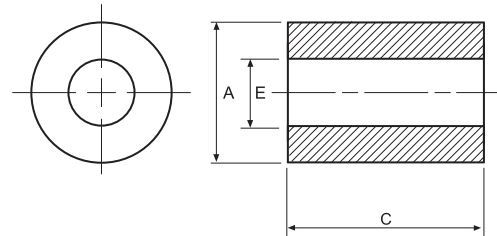

■ DIMENSIONS AND EFFECTIVE PARAMETERS

CORES	DIMENSIONS (mm)			Impedance		Type
	A	E	C	25MHz (min)	100MHz (min)	
T3.5x1.6x3.25	3.50 ± 0.20	1.60 ± 0.15	3.25 ± 0.20	17	35	2
T4x2x3	4.00 ± 0.20	2.00 ± 0.10	3.00 ± 0.20	14	30	1
T5.84x3.05x1.52	5.84 ± 0.25	3.05 ± 0.15	1.52 ± 0.10	8	23	1
T6.35x3.18x6	6.35 ± 0.25	3.18 ± 0.20	6.00 ± 0.30	28	62	1
T7.6x3.6x4.2	7.60 ± 0.30	3.60 ± 0.20	4.20 ± 0.20	20	38	1
T8x4x3	8.00 ± 0.30	4.00 ± 0.15	3.00 ± 0.15	20	59	2
T9.52x4.8x3.18	9.52 ± 0.25	4.80 ± 0.20	3.18 ± 0.25	16	35	1
T10.5x5.5x5	10.50 ± 0.35	5.50 ± 0.20	5.00 ± 0.30	20	38	1
T12x6x4	12.00 ± 0.40	6.00 ± 0.20	4.00 ± 0.30	18	36	1
T12.7x7.92x6.35	12.70 ± 0.40	7.92 ± 0.25	6.35 ± 0.30	20	40	1
T13x7x7	13.00 ± 0.40	7.00 ^{+0.40} _{-0.00}	7.00 ± 0.30	25	50	1
T14.27x6.35x5.08	14.27 ± 0.40	6.35 ± 0.25	5.08 ± 0.20	24	50	1
T16x9x4	16.00 ± 0.50	9.00 ± 0.30	4.00 ± 0.20	13	30	1
T17.42x9.52x12.7	17.42 ± 0.50	9.52 ± 0.30	12.70 ± 0.40	44	88	1
T18.5x10x5	18.50 ± 0.50	10.00 ± 0.30	5.00 ± 0.30	42	70	1
T20x10x5	20.00 ± 0.50	10.00 ± 0.30	5.00 ± 0.20	23	56	1
T25x15x12	25.00 ± 0.50	15.00 ± 0.30	12.00 ± 0.40	35	80	1
T31x19x22	31.00 ± 0.70	19.00 ± 0.50	22.00 ± 0.60	63	117	1
T38.1x19.05x12.7	38.10 ± 0.70	19.05 ± 0.50	12.70 ± 0.40	48	87	1

Remark: Customized dimensions are available.